

2024

东营新营大金属制品有限责任公司
NEW YOUNG-STAR METAL CO.,LTD

东营海普金属制品有限公司
HAIPU MARINE EQUIPMENT CO.,LTD



Credibility is our fundamental

Our Company

Haipu Marine Equipment co.,ltd / New Young Star Metal Co.ltd is specialized in various ship deck machineries,marine engineering machineries and ship fittings.Our main products anchor windlass, winch and anchors have been passed the certifications of CCS, BV, DNV and many other authoritative classification societies. and exported to the United States,Australia, Canada,New Zealand, Brazil Indonesia Malaysia and many European countries all the year round.We are also able to manufacture products according to our clients' designs, samples, or sketches. We look forward to cooperating with you!


东营海普金属制品有限公司/东营新营大金属制品有限责任公司主要生产各种船舶甲板机械,海洋工程机械,以及船舶舾装件。我们自主研发的锚机,绞车以及船锚成功的通过了CCS, BV, DNV等多家权威船级社认证并常年出口到美国, 澳大利亚, 加拿大, 新西兰, 巴西, 印尼, 马来西亚, 以及欧洲的多个国家。我们也可以根据客户提供的图纸、样品或者草图定做各类不锈钢制品以及各种设备。

Contents

Vertical Windlass 立式锚机	2
Capstan Winch 绞盘	12
Horizontal Windlass 卧式锚机	16
Electric winch 电动绞车	24
Drum Winch 小型电动绞车	26
Line Launder 船用小型吊装机	40
Accessories 配件	41
Bait trap 鱼饵笼	44
Trim Tab systems 压浪器	45
Anchors 锚	48
Bow Rollers 锚支架	57
Anchor Connector 锚连接器	64
Chain Stopper 掣链器	65
Chain Guide 导链滚轮	68
Chain pipe 导链筒	70
Fairleads 导缆孔	73
Marine Fairleads 船用导缆钳	75
Chain 锚链	77
Dock Line 缆绳	81
Wire Rope 钢丝绳	84
Nylon Wheel 尼龙轮	85
Marine Bollard 国标带缆桩	86
Marine Hardware 船用五金	90
Shackles 索具	120
Products Selection Guide 产品选型	136



VERTICAL WINDLASS

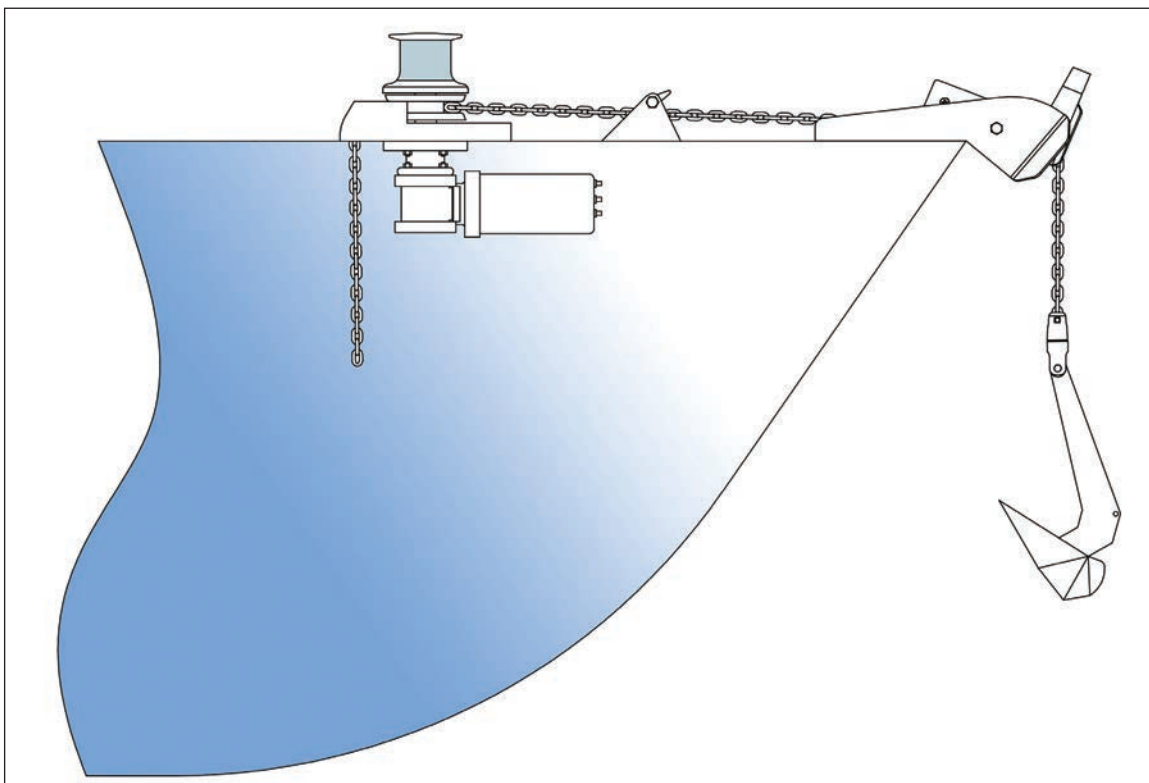


Features 特点

- Vertical design suits powerboats or sailboats and can be utilized for anchor ropes, as docking capstans on larger craft, or auxiliary line hauling.
- High-quality polished 316 stainless steel surface makes for a beautiful appearance
- Simplified installation by modular design and precise alignment of gearbox to the top works utilizing marine-grade stainless steel.
- Rope-chain gypsy
- Fit include hand-switch, foot-switch, control box and wrench
- 立式锚机配合锚绳可以适用于机动船和帆船，也可以当作绞车用在大的船舶上，也可以用来辅助搬运。
- 不锈钢 316 材质，高质量镜面抛光。
- 锚链轮可以使用锚绳和锚链，每种锚机都有两种规格可供选择。
- 配手动开关，脚踏开关，换向器，以及配套操作把手



型号 Model	YD411/YD411H	YD511/YD511H	YD611/YD611H	YD711/YD711H	YD811/YD811H	YD1011/YD1011H
电机 Motor	400W	600W	800W	1200W	1600W	2000W
电源供电 Power Supply	12V/24V	12V/24V	12V/24V	12V/24V	12V/24V	12V/24V
工作负载 Working Load	125 Kg	180 Kg	250 Kg	400 Kg	510 Kg	660Kg
最大拉力 Max. Pull	420 Kg	560 Kg	700 Kg	1200 Kg	1600 Kg	1900Kg
速度 Line speed	30m/ min	25m/min	20m/min	20m/min	20m/min	20m/min
工作电流 AMPS @Working load	30A/20A	60A/40A	100A/50A	120A/75A	165A/90A	170A/95A
净重 Net Weight	12/12.6Kg	12.3/12.6Kg	19/21Kg	24/25.5Kg	29/31.5Kg	30.5/33Kg
锚绳尺寸 Rope Size	14/16mm	14/16mm	18mm	18/20mm	18/20/26mm	20/26/28mm
锚链尺寸 Chain Size/ Gypsy	DIN766-6mm/7mm	DIN766-6mm/7mm	DIN766-8mm	DIN766-8mm/10mm	DIN766-8/10/12mm	DIN766-10/12/13mm

Dimension 尺寸图

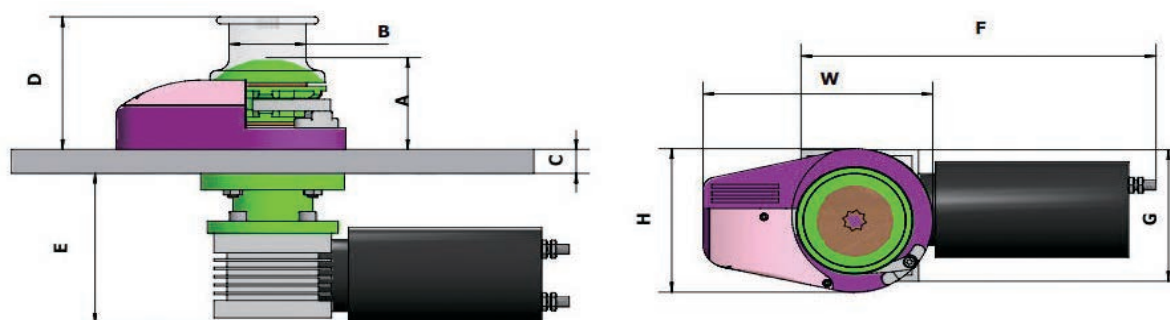

型号 Model	Motor(W)	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	H(mm)	W(mm)
YD411	400	85	—	22-41	—	140	265	122	180
YD411H	400	—	59	22-41	115	135	265	122	181
YD511	600	85	—	22-41	—	140	275	122	180
YD511H	600	—	59	22-41	115	135	275	122	181
YD611	800	110	—	38-54	—	145	320	155	220
YD611H	800	—	79	38-54	165	145	320	155	220
YD711	1200	110	—	38-54	—	172	350	170	265
YD711H	1200	—	79	38-54	165	172	350	170	265
YD811	1600	110	—	38-54	—	190	415	170	265
YD811H	1600	—	79	38-54	165	190	415	170	265
YD1011	2000	130	—	38-54	—	190	415	195	295
YD1011H	2000	—	110	38-54	235	190	415	195	295


Options 可选配置：

- With capstan & without capstan 带绞缆筒和不带绞缆筒两种类型可供选择
- Different-length bolts for any deck thickness 根据安装甲板厚度不同配置不同长度的固定螺栓
- Full range of accessories including anchors, bow rollers, chain stoppers, chain & rope 多种其他配套配件供选择，包含船锚，锚支架，链卡，锚链和锚绳
- AC electric motor available 也可以配置交流电机

AC Vertical windlass 交流立式锚机

型号 Model	YD911-X1/ YD911H-X2	YD911-X2/ YD911H-X2	YD1011-X1/ YD1011H-X1	YD1011-X2/ YD1011H-X2
电机 Motor	1500W	2200W	1500W	2200W
电源供电 Power Supply	220V/380V	220V/380V	220V/380V	220V/380V
工作负载 working Load	272 Kg	425 Kg	290Kg	640Kg
最大拉力 Max. Pull	408 Kg	640 Kg	435 Kg	960Kg
速度 Line speed	20m/ min	20m/min	20m/min	20m/min
工作电流 AMPS@Working load	6A/9A	8A/13.6A	6A/9A	8A/13.6A
净重 Net Weight	31/33Kg	35/37Kg	31.7/34.7Kg	36.5/38.5Kg
锚绳尺寸 Rope Size	18/20mm	18/20mm	20/26/28mm	20/26/28mm
锚链尺寸 Chain Size/Gypsy	DIN766-8mm/10mm	DIN766-8mm/10mm	DIN766-10/12/13mm	DIN766-10/12/13mm

Dimension Diagram 尺寸图

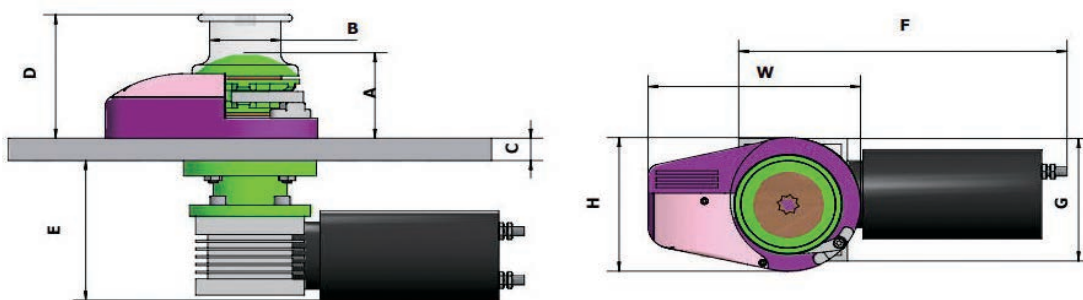


型号 Model	电机交流 Motor AC)	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	H(mm)	W (mm)
YD911-X1	1500W	110	—	38-54	—	220	465	170	265
YD911H-X1	1500W	—	79	38-54	165	220	465	170	265
YD911-X2	2200W	110	—	38-54	—	220	485	170	265
YD911H-X2	2200W	—	79	38-54	165	220	485	170	265
YD1011-X1	1500W	130	—	38-54	—	225	465	195	295
YD1011H-X1	1500W	—	110	38-54	235	225	465	195	295
YD1011-X2	2200W	130	—	38-54	—	225	485	195	295
YD1011H-X2	2200W	—	110	38-54	235	225	485	195	295



型号 Model	YD201/ YD201H	YD202/ YD202H	YD203/ YD203H
电机 Motor	600W	900W	1200W
电源供电 Power Supply	12V/24V	12V/24V	12V/24V
工作负载 working Load	186Kg	270 Kg	400Kg
最大拉力 Max. Pull	560 Kg	740 Kg	1200 Kg
速度 Line speed	25m/ min	20m/min	20m/min
工作电流 AMPS@Working load	60A/40A	110A/55A	120A/75A
净重 Net Weight	11.5/12.2Kg	18.5/20.3Kg	22.8/24.5Kg
锚绳尺寸 Rope Size	14/16mm	18mm	20mm
锚链尺寸 Chain Size/Gypsy	DIN766-6mm/7mm	DIN766-8mm	DIN766-10mm

Dimension Diagram 尺寸图

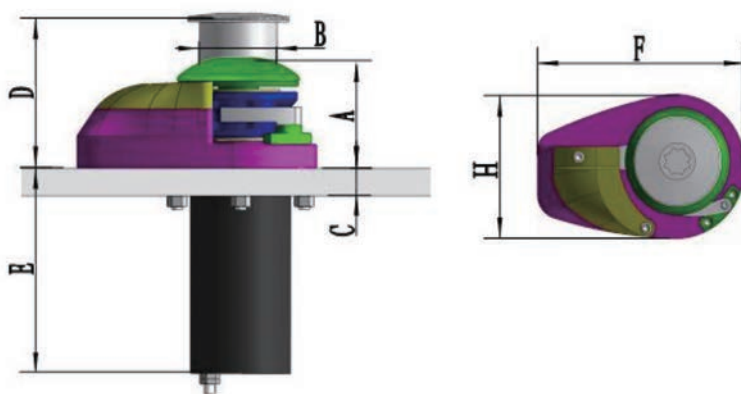

型号 Model	电机 Motor	A	B	C	D	E	W	H
YD201	600W	85		22-41		230	180	122
YD201H	600W		59	22-41	115	230	180	122
YD202	900W	110		38-54		250	220	155
YD202H	900W		79	38-54	165	250	220	155
YD203	1200W	110		38-54		340	265	170
YD203H	1200W		79	38-54	165	340	265	170

YDG Series 国标系列锚机

Features 特点

- High-quality polished 316 stainless steel surface makes for a beautiful appearance
- With different drives and recommended for boats up to 90M.
- Independent Gypsy and drum operation
- The YDG Series windlass can use chains up to 30mm with stud link in diameter.
- Possibility of 230,400V

- 不锈钢 316 材质，高质量镜面抛光。
- 多种型号可适用于长达 90 米的船。
- YDG 系列锚机适用国标 12.5-30mm 有挡锚链
- 电制 220V/380V

YDG series with Horizontally & Vertical Mounted
AC Electric Motor and Band Brake


The motor with electromagnetic brake, operation safer.

国标系列锚机，装配水平或者直立式电机以及手刹装置
电机带有电磁制动车，使得操作更有安全性。




型号 Model	电机 Motor	电源供应 Power Supply	电流 (工作负载) Amps @working load	最大拉力 Max. Pull(kg)	工作负载 Work load(kg)	速度 Speed (m/min)	锚链尺寸 Chain size (mm)Stud Link	净重 (参考) N.W(kg)
YDG-12.5	3KW/2.2KW	220V/380V	19.1 /4.9A	996	664	9.6	12.5	97
YDG-14	3KW	380V/3PH	6.2A	1250	833	10	14	116
YDG-16	4KW	380V/3PH	8.2A	1632	1088	10.6	16	161
YDG-17.5	4KW	380V/3PH	8.2A	1952	1301	9.5	17.5	185
YDG-19	5.5KW	380V/3PH	11A	2301	1534	9.4	19	255
YDG-20.5	5.5KW	380V/3PH	11A	2680	1786	9.6	20.5	306
YDG-22	7.5KW	380V/3PH	14.6A	3086	2057	10.7	22	
YDG-24	11KW	380V/3PH	21.6A	3672	2448	11.4	24	
YDG-26	11KW	380V/3PH	21.6A	4310	2873	11.2	26	
YDG-28	15KW	380V/3PH	28.9A	4998	3332	13.3	28	
YDG-30	15KW	380V/3PH	28.9A	5738	3825	11.5	30	

Dimension 尺寸图

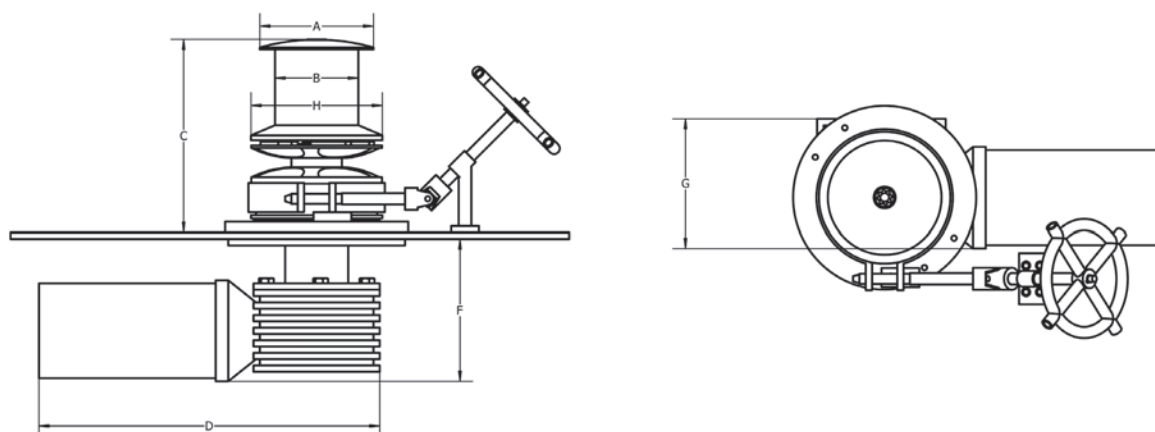

型号 Model	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	H(mm)
YDG-12.5	290	132	310	500	216	180	210
YDG-14	305	137	330	530	273	275	240
YDG-16	350	145	375	530	295	290	270
YDG-17.5	402	160	425	550	320	310	293
YDG-19	450	185	450	600	320	330	320
YDG-20.5	500	202	495	600	360	350	350
YDG-22	530	250	580	780	440	530	366
YDG-24	560	250	635	970	480	610	399
YDG-26	600	303	661	970	500	610	433
YDG-28	650	325	690	1050	520	710	466
YDG-30	700	330	820	1050	620	710	500

Dimension 尺寸图

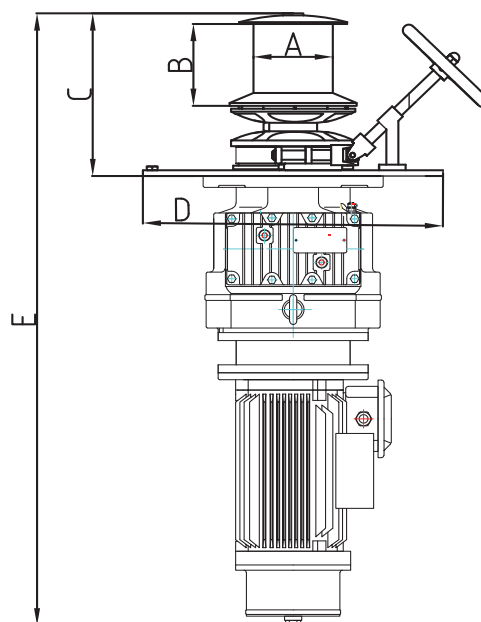

型号 MODEL	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YDG-12.5	132	143	283	560	1065
YDG-14	138	154	333	560	1192
YDG-16	156	160	363	690	1155
YDG-17.5	166	170	408	720	1200
YDG-19	185	197	454	720	1230
YDG-20.5	202	219	490	750	1260
YDG-22	250	226	538	1000	1390
YDG-24	250	236	551	1000	1410
YDG-26	303	256	585	1100	1620
YDG-28	325	306	660	1100	1700
YDG-30	330	328	720	1100	1800

Hydraulic Windlass 国标系列液压锚机

Features 特点

- High-quality polished 316 stainless steel surface makes for a beautiful appearance
 - With different drives and recommended for boats up to 90M.
 - Independent Gypsy and drum operation
 - The YD(H) Series windlass can use chains up to 20.5mm with stud link in diameter.
 - Optional accessories: on-off valve, pressure relief valve, flow control valve, foot switch
- 不锈钢 316 材质，高质量镜面抛光。
 - 多种型号可适用于长达 90 米的船。
 - YDG 系列锚机适用国标 12.5~20.5mm 有挡锚链
 - 配件选择：开关阀，泄压阀，控流阀，脚踏开关



型号 MODEL	YDG(H)-12.5	YDG(H)-14	YDG(H)-16	YDG(H)-17.5	YDG(H)-19	YDG(H)-20.5
最大拉力 Max. Pull(kg)	1100kg	1330kg	1660kg	2100kg	3300kg	2900kg
工作负载 Working load(kg)	664kg	833kg	1088kg	1301kg	1534kg	1786kg
速度 Speed(m/min)	12.5	11.3	12.9	12.61	13.68	13.2
最大压力 Max. Pressure	25Mpa	25Mpa	25Mpa	25Mpa	25Mpa	25Mpa
理论排量 Hydraulic Flow	485ml/r	791ml/r	1022ml/r	1184ml/r	1634ml/r	1761ml/r
锚链尺寸 Chain Size(mm)	AM2-12.5	AM2-14	AM2-16	AM2-17.5	AM2-19	AM2-20.5
重量 (参考) Net Weight(kg)	126	140	205	270	308	420

Optional Accessories

可选配件


Manual proportional flow directional
block valve
船用手动比例流量方向复合阀



Hydraulic Capstan



Dimension 尺寸图

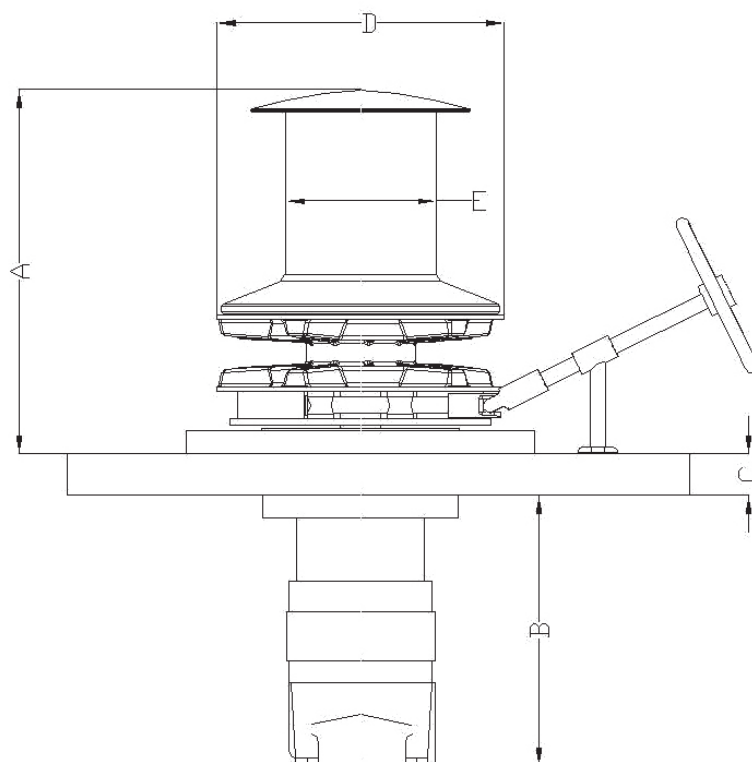


型号 MODEL	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	H(mm)
YDG(H)-12.5	290	132	310	380	216	500	210
YDG(H)-14	305	137	330	380	273	500	240
YDG(H)-16	350	145	375	410	295	530	270
YDG(H)-17.5	402	160	425	495	320	600	293
YDG(H)-19	450	185	450	495	320	600	320
YDG(H)-20.5	500	202	495	510	360	720	350

Capstan Winch 绞盘

- Designed for simple, low cost anchor recovery on smaller boats and rope hauling on larger vessels
- line hauling from any direction
- Simplified through deck installation by modular design and precise alignment of gearbox to the top works utilising stainless steel bolts
- Compact, reliable gearbox, made of orrosion resistant material
- Heavy duty ,dual direction motors, designed for marine winches
- Easily disassembled for servicing
- Fit include hand-switch, foot-switch, control box and wrench
- 设计简单，成本较小，适合小船使用，也可以用在稍微大一些船上拖拽绳索。
- 可以多个方向拖拽绳子。
- 甲板安装过程简单，紧固螺栓材质符合船用不锈钢标准。
- 减速箱设计简洁可靠，由防锈材料制造。
- 电机质量可靠，专为船用绞盘设计。
- 拆装简单，便于维修和维护。
- 配套手动开关，脚踏开关，换向器和把手。



型号 Model	净重 Net Weight	电源供应 Power Supply	电机 Motor (W)	工作电流 Current absorption	工作负载 Working Load(kg)	最大拉力 Max.Pull(kg)	速度 Line Speed
YDVC-001	9.2kg	12V /24V	600	60A/40A	190	400	25m/min
YDVC-002	14kg	12V /24V	1000	115A/60A	350	680	25m/min
YDVC-005	21kg	12V /24V	1600	165A/90A	520	1230	20m/min
YDVC-006	32kg	380V/220V	2000	12A	680	1760	20m/min
YDVC-007	48kg	380V/220V	3000	20A	890	2130	20m/min

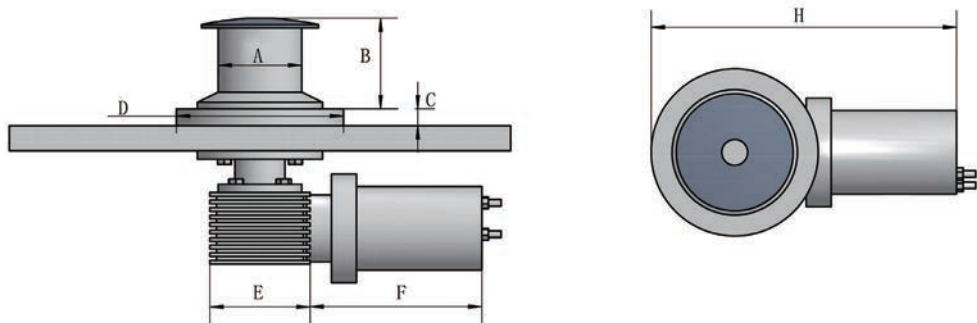

型号 Model	A	B	C	D	E	F	H
YDVC001	60	65	15-40	110	100	155	270
YDVC002	80	90	20-50	150	140	165	330
YDVC005	110	130	20-50	150	140	190	360
YDVC006	130	160	20-50	170	160	260	480
YDVC007	160	190	20-50	200	180	320	560



Capstan Winch 绞盘

Features 特点

- Designed for traditional rope and chain combination anchor rodes
- line hauling from any direction
- Simplified through deck installation by modular design and precise alignment of gearbox to the top works utilising SS bolts
- Compact, reliable gearbox, made of corrosion resistant material
- Heavy duty,dual direction motors, designed for marine winches
- Easily disassembled for servicing
- Fit include hand-switch,foot-switch, control box and wrench
- 该系列绞盘可以配套锚绳和锚链，也可以锚绳和锚链编接在一起同时使用
- 绳子可以多个方向拖拽
- 甲板安装过程十分简单，紧固螺栓材质符合船用不锈钢标准。
- 减速箱由防锈材料制造。
- 电机质量可靠，专为船用绞盘设计。
- 拆装简单，便于维修和维护。
- 配套手动开关，脚踏开关，换向器，和把手。



型号 Model	净重 Net Weight	电源供应 Power Supply	电机 motor	工作电流 Current absorption	工作负载 working load	最大拉力 Max. Pull	速度 Speed	锚绳尺寸 Rope Size	锚链尺寸 Chain Size/Gypsy
YDVC-003	7kg	12V/24V	400W	30A/20A	125kg	420kg	30m/min	16mm	DIN766-6/7mm
YDVC-004	9kg	12V /24V	600W	60A/40A	186kg	560kg	25m/min	16mm	DIN766-6/7mm

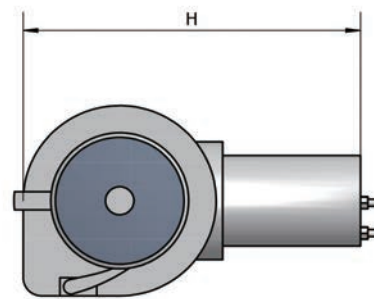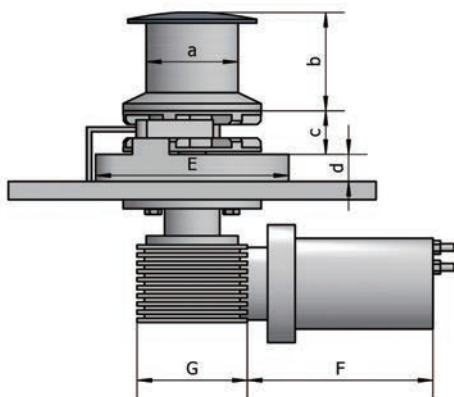

型号 Model	A	B	C	D	G	F	H
YDVC-003	59mm	60mm	20~40mm	16mm	100mm	155mm	265mm
YDVC-004	59mm	60mm	20~40mm	16mm	100mm	155mm	275mm

Capstan 绞盘




Features 特点

- Polished stainless steel finish
- Fluted Capstan for line grip Reversible motor
- Easily disassembled for servicing:disassemble from top and bottom
- Large capstan drums for increased line hold
- The gearbox is driven by a vertically mounted below deck
- Fit include hand-switch, foot-switch, control box and wrench
- 不锈钢镜面抛光
- 带凹槽的绞缆筒，便于抓牢绳子
- 电机可正反转
- 绞盘上下两部分是可分开的，便于组装和拆卸检修
- 加大绞缆筒可以容纳更多绳子
- 减速箱立式安装在甲板以下
- 配套手动开关，脚踏开关，换向器和把手

型号 Model	净重 Net.Weight	电源供应 Power Supply	电机 Motor(W)	工作电流 Current absorption	工作负载 Working Load(kg)	最大拉力 Max.Pull(kg)	速度 Line Speed
Capstan-001	7kg	12V /24V	600W	60A/40A	160kg	320kg	22m/min
Capstan-002	11kg	12V / 24V	800W	100A/50A	200kg	380kg	22m/min
Capstan-003	14kg	12V /24V	1200W	120A/75A	260kg	420kg	20m/min
Capstan-004	18kg	12V/24V	1600W	165A/90A	340kg	900kg	20m/min

型号 Model	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	H(mm)	G(mm)
Capstan-001	89	128	59	10.5	22-41	92	197	59
Capstan-002	132	138	92	15	33-50	92	210	78
Capstan-003	132	138	92	15	33-50	114	240	78
Capstan-004	148	148	114	15	33-50	114	322	100

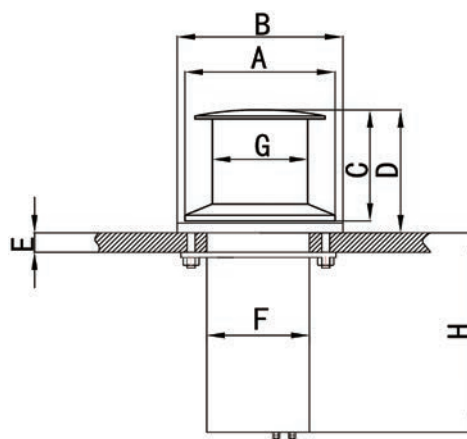


Capstan 绞盘

Features 特点

- Polished stainless steel finished
- Fluted capstan for line grip
- Motors work very well with good pull
- Mooring a vessel will be simple by using stern handling capstans
- A range of capstans and power size are available
- 绞缆筒不锈钢镜面抛光
- 绞缆筒表面凹槽设计，便于抓牢绳索
- 大拉力电机
- 使用该绞盘，系泊过程更加轻松简单
- 多种尺寸型号可以选择（绞缆筒和电机）



型号 Model	净重 Net Weight	型号 Power Supply	电机 Motor	工作电流 Current absorption	工作负载 working load	最大拉力 Max. Pull	速度 Speed
Capstan-005	48kg	380V,3PH/50HZ	2.2KW	6A	320kg	710kg	25m/min
Capstan-006	74kg	380V ,3PH/50HZ	3KW	6.8A	480kg	990kg	20m/min
Capstan-007	92kg	380V,3PH/50HZ	4KW	8.2A	690kg	1560kg	20m/min
Capstan-008	146kg	380V ,3PH/50HZ	5KW	11A	1010kg	2340kg	20m/min

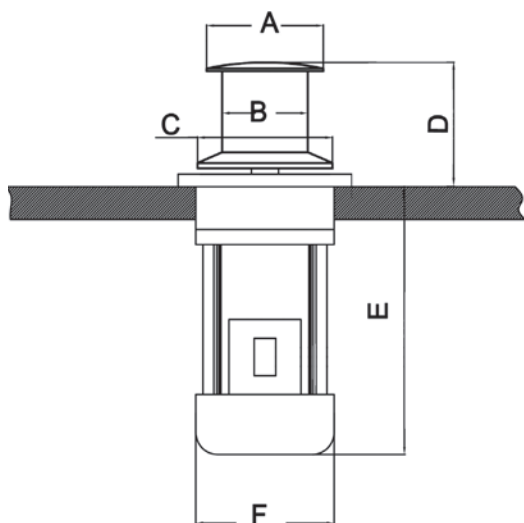

Dimension 尺寸图

型号 Model	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)
Capstan-005	180	132	210	180	720	240
Capstan-006	200	145	240	210	810	250
Capstan-007	220	160	280	260	920	280
Capstan-008	250	180	320	300	1010	280


YH Series Horizontal Windlass YH 系列卧式锚机



Features 特点

- All the parts above the deck is 316 L stainless steel, fully waterproof and rustproof.
- Manual free- fall system
- Simple deck mounted installation with no under deck parts
- Fit include hand switch, foot switch, solenoid and handle
- 所有外置的部件都是 316L 不锈钢材质，防水防锈
- 带离合装置，可以快速放锚
- 安装简单，没有需要安装在甲板以下的部分
- 配手动开关，脚踏开关，换向器，把手

型号 Model	净重 Net.Weight	电源供应 Power Supply	电机 Motor (W)	工作电流 AMPS@Working Load	工作负载 Working Load(kg)	最大拉力 Max. Pull(kg)	速度 Line Speed	锚绳尺寸 Rope Size	锚链尺寸 Chain Size/ Gypsy
YH600	13.2Kg	12V/24V	600W	60A/40A	186Kg	560Kg	25m/min	14/16mm	DIN766 -6/7mm
YH900	18.5Kg	12V/24V	900W	110A/55A	270Kg	740Kg	20m/min	18mm	DIN766-8mm
YH1200	27.2Kg	12V/24V	1200W	120A/75A	400Kg	1200Kg	20m/min	20mm	DIN766-10mm

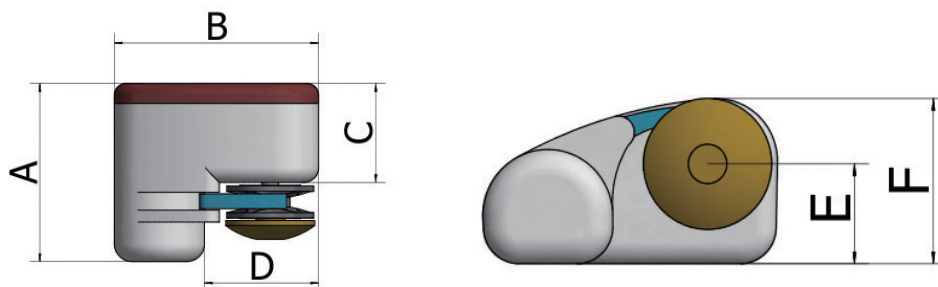

型号 Model	电机 Motor	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)
YH600	600W	185	265	110	130	90	155
YH900	900W	290	320	180	195	235	280
YH1200	1200W	290	320	180	195	235	280

Horizontal Windlass 卧式锚机



SH600& SH1000

Features 特点

- All the parts above the deck is 316 L stainless steel, fully waterproof and rustproof.
- Manual free- fall system
- Easy and speed installation, vertical motor allowing installation above the deck
- 所有外置的部件都是 316L 不锈钢材质，防水防锈
- 带离合装置，可以快速放锚
- 直立式电机，可以在甲板上直接打孔安装锚，简单快速



型号 Model	净重 Net.Weight	电源供应 Power Supply	电机 Motor(W)	工作电流 AMPS @Working Load	工作负载 Working Load(kg)	最大拉力 Max.Pull(kg)	速度 Line Speed	锚绳尺寸 Rope Size	锚链尺寸 Chain Size/ Gypsy
SH600	13.5kg	12V/24V	600W	60A/40A	210kg	600kg	22m/min	14/16mm	DIN766 - 6/7mm
SH1000	18kg	12V/24V	1000W	115A/60A	350kg	750g	20m/min	18mm	DIN766- 8MM

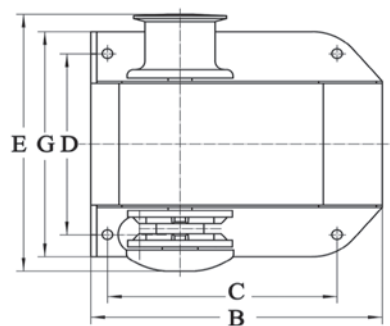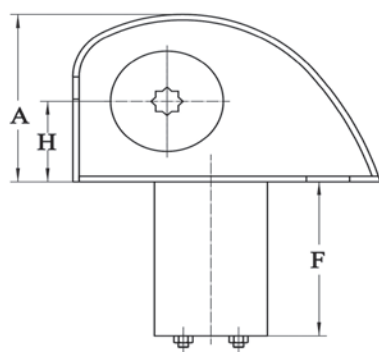

Dimension 尺寸图

型号 Model	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	G(mm)	H(mm)
SH600	150	245	193	164	260	138	204	72
SH1000	204	324	245	190	304	150	232	105

Horizontal Windlass YDH 卧式锚机

Features 特点

- Twin capstan, single gypsy, but you also can choose twin gypsy
- Reversible motor
- Independent operation of capstans and gypsy by declutching the drive
- Simple deck mounted installation with no under deck parts
- Simplified maintenance with ability to strip the running gear (chain-wheel and drum) from the windlass without disturbing the windlass mounting
- Totally sealed gearbox with ground worm drive
- Horizontal windlass casing are cast marine grade aluminium alloy with white epoxy enamel finish
- Fit include hand-switch, control box and wrench
- 双绞缆，单链轮，但是您也可以根据自己需要选择安装双链轮
- 电机可正反转
- 当合上离合器装置时，锚链轮和绞缆筒可以分开工作
- 安装简单，不需要安装在夹板以下的部分
- 需要检修或者保养时，不需要把锚机从夹板上拆下，只需要把锚链轮和绞缆筒拆下来就可以了。
- 全封闭蜗轮蜗杆式减速箱
- 卧式锚机外壳是船用铸铝一体成型，白色环氧树脂喷塑
- 配手动开关，脚踏开关，换向器，把手



Specification 规格型号


型号 Model	YDH-011	YDH-012	YDH-013	YDH-014	YDH-015	YDH-016
电机 Motor	600W	1000W	1400W	1600W	2000W	3000W
电源供电 Power Supply	12V/24V	12V/24V	12V/24V	12V/24V	24V/380V/220V	380V/220V
工作负载 Working Load	190 Kg	350Kg	520Kg	660Kg	900Kg	1200Kg
最大拉力 Max. Pull	600Kg	750Kg	1100 Kg	1400 Kg	2000Kg	2500Kg
速度 Line speed	25m/ min	25m/min	25m/min	20m/min	20m/min	20m/min
工作电流 AMPS@Working load	60A/40A	115A/60A	140A/75A	165A/90A	6A/9A	8A/13.6A
净重 Net Weight	14Kg	23Kg	33Kg	36Kg	60Kg	70Kg
锚绳尺寸 Rope Size	14/16mm	18/20mm	18mm	18/20mm	18/20/26mm	20/26/28mm
锚链尺寸 Chain Size/Gypsy	DIN766-6mm/7mm	DIN766-8mm/10mm	DIN766-8mm/10mm	DIN766-10/12mm	DIN766-10/12/13mm	DIN766-10/12/13mm

Optional Accessories

可选配件



Dimension 尺寸图

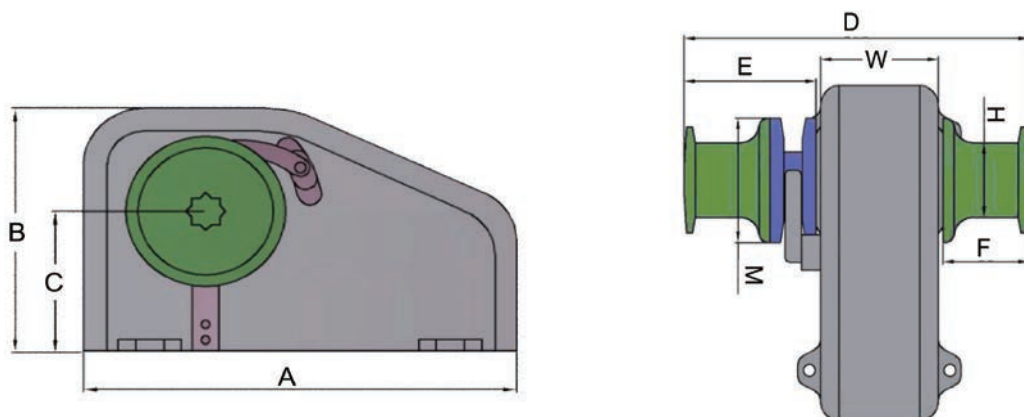


型号 Model	电机 Motor	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	H(mm)	M(mm)	W(mm)
YDH-011	600W	310	170	105	295	98	63	59	89	120
YDH-012	1000W	410	215	125	380	145	95	79	132	130
YDH-013	1400W	435	235	145	430	155	95	79	132	170
YDH-014	1600W	435	235	145	430	155	95	79	132	170
YDH-015	2000W	590	310	200	560	178	120	100	145	255
YDH-016	3000W	590	310	200	560	178	120	100	145	255

多种组合形式可以选择

1. 双链轮
2. 单链轮 + 单绞缆筒
3. 单绞缆筒
4. 双绞缆筒
5. 其他组合样式

Several combination options:

1. Double Gypsy
2. single Gypsy and single capstan
3. single capstan
4. Double capstan
5. Other types

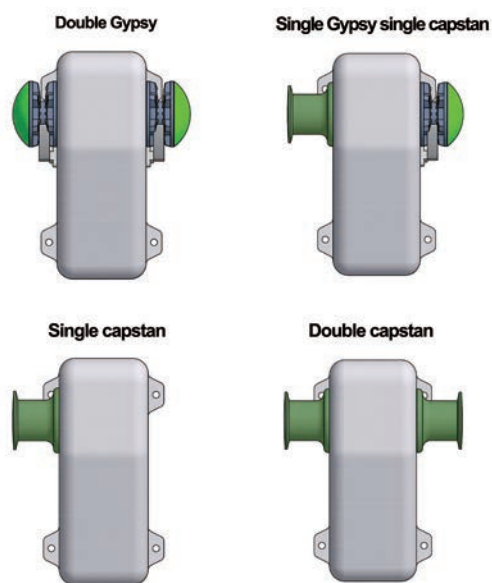

Horizontal Windlass GB Series 卧式锚机




- Twin capstan, single gypsy, but you also can choose twin gypsy
- Reversible motor
- Independent operation of capsatans and gypsy by declutching the drive
- Simple deck mounted installation with no under deck parts
- Simplified maintenance with ability to strip the running gear (chain-wheel and drum) from the windlass without disturbing the windlass mounting
- Totally sealed gearbox with ground worm drive
- Horizontal windlass casing are cast marine grade aluminium alloy with white epoxy enamel finish
- Fit include hand-switch, control box and wrench
- 双绞缆, 单链轮, 但是您也可以根据自己需要选择安装双链轮
- 电机可正反转
- 当合上离合器装置时, 锚链轮和绞缆筒可以分开工作
- 安装简单, 没有需要安装在夹板以下的部分
- 需要检修或者保养时, 不需要把锚机从夹板上拆下, 只需要把锚链轮和绞缆筒拆下来就可以了
- 全封闭蜗轮蜗杆式减速箱
- 卧式锚机外壳是船用铸铝一体成型, 白色环氧树脂喷塑
- 配手动开关, 脚踏开关, 换向器, 把手

Specification 规格型号

型号 Model	HP12.5	HP14	HP16	HP17.5	HP19	HP20.5
电机 Motor	3 /2.2KW	3.5KW	4KW	4KW	5.5KW	7.5KW
电源供电 Power Supply	220V/380V	380V/3PH	380V/3PH	380V/3PH	380V/3PH	380V/3PH
工作负载 working Load(kg)	664	833	1088	1301	1534	1786
最大拉力 Max. Pull	996	1250	1632	1952	2301	2680
速度 Line speed	10	10	10.6	10.2	10.2	10.4
工作电流 AMPS@Working load	19.1/4.9	6.2A	8.2A	8.2A	11A	14.6A
参考净重 Net Weight (kg)	205	260	320	410	490	530
锚链尺寸 Chain Size/Gypsy(mm)	Stud Link-12.5mm	Stud Link-14mm	Stud Link-16mm	Stud Link-17.5mm	Stud Link-19mm	Stud Link-20.5mm

Dimension 尺寸图

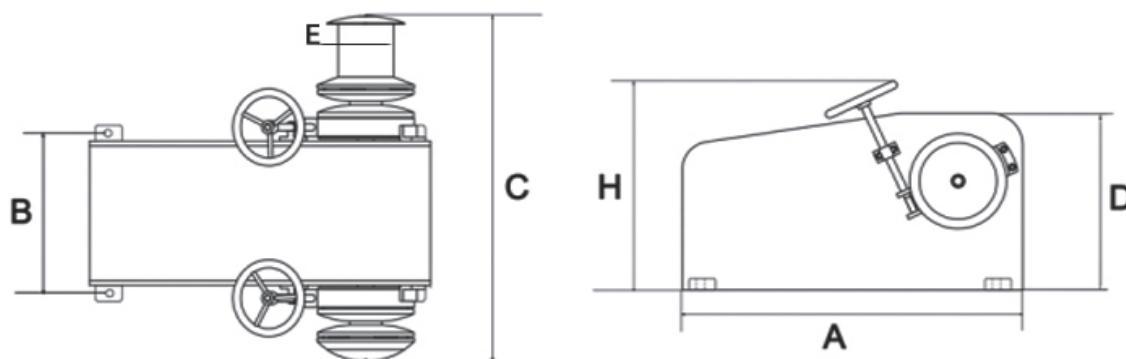

型号 MODEL	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	H(mm)
HP12.5	850	420	840	460	132	450
HP14	850	428	870	460	137	450
HP16	880	450	930	500	145	490
HP17.5	900	480	1010	550	160	580
HP19	990	510	1100	560	185	630
HP20.5	1050	510	1240	680	202	740

电制有 220V/380V 可以选择，电机也可以选择单速或者双速配置
多种组合形式可以选择

1. 单链轮 + 单绞缆筒
2. 单链轮 + 双绞缆筒
3. 双链轮 + 单绞缆筒
4. 双链轮 + 双绞缆筒

AC 380v or 220v motor drive, double speed motor also available
Several combination options:

1. Single Gypsy single capstan
2. single Gypsy twin capstan
3. Twin Gypsy single capstan
4. Twin Gypsy twin capstan




Horizontal Capstan 卧式绞盘

Features 特点

- Single capstan
- Reversible motor
- Simple deck mounted installation with no under deck parts
- Simplified maintenance with ability to strip the running gear (chain-wheel and drum) from the windlass without disturbing the windlass mounting
- Totally sealed motor and gearbox
- Marine grade aluminium alloy with white epoxy paint finish housing and capstan
- Fit include hand-switch, control box and wrench
- 单绞缆筒
- 电机可以正反转
- 安装简单，不需要安装在甲板以下的部分
- 需要保养时，不需要把绞盘从甲板上拆下，只需要把绞缆筒拆下就可以
- 电机以及减速机全封闭
- 绞盘外壳和绞盘头全部铸铝材料制作，一体成型，水密，壳体表面白色环氧树脂漆
- 配件手动开关，脚踏开关，换向器，也可以配遥控器



型号 Model	净重 N.W.	电源供电 Power Supply	电机 Motor	工作电流 AMPS@ Working load	工作负载 working Load	最大拉力 Max. Pull	速度 Speed	锚绳尺寸 Rope Size
YDG-311	12Kg	12V/24V	600W	60A/40A	175Kg	420Kg	16-20m/min	12-16mm
YDG-411	23Kg	12V/24V	1200W	120A/75A	400Kg	860Kg	18-22m/min	16-20mm

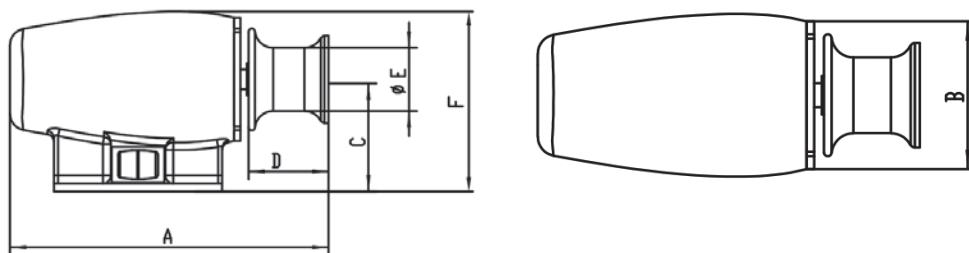

型号 Model	电机 Motor	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YDG-311	600W	390	170	140	100	79
YDG-411	1200W	495	180	160	125	94.5

Horizontal electric combined Windlass 卧式组合锚机

Equipped with both clutch and band brake to allow independent operation of gypsy and drum.



High strength drive shaft, gypsy and warping drum are stainless steel

This type has a gypsy for chains 12.5,14,16,17.5,19,20.5,22,24,26,28,30mm stud-link

此型号组合式锚机配置双离合，双刹车，绞缆筒和锚链轮可以分开独立操作

高强度主轴，锚链轮和绞缆筒为不锈钢材质

有多个型号可供选择，适用链规格为有挡锚链 12.5,14,16,17.5,19,20.5,22,24,26,28,30mm

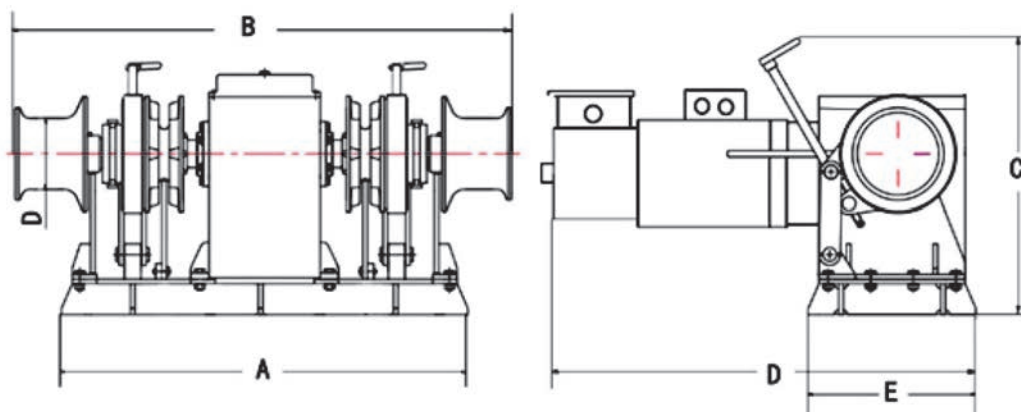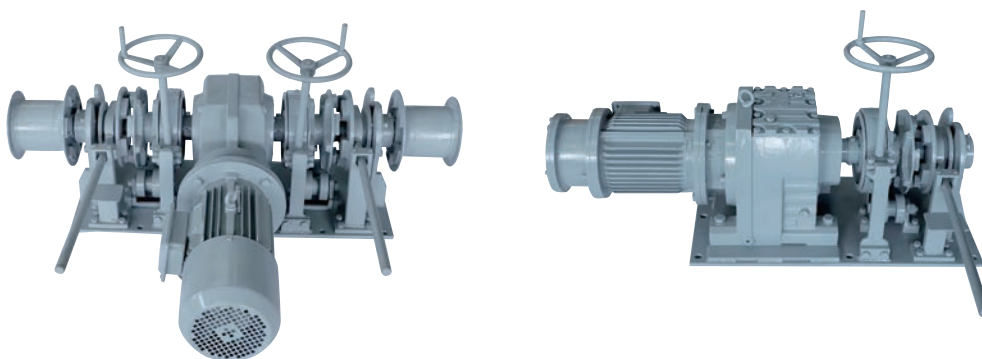

型号 Model	电制 Power Supply	工作负载 (KN) Working Load	最大拉力 (KN) Max Pull	速度 Speed	锚链尺寸 Chain Size	尺寸 (A*B*C*D) mm Dimension(A*B*C*D)
HC1816	380V,3PH/50HZ	6.6/8.3/10.9/13	9/12.5/16.3/19.5	>9m/min	12.5/14/16/17.5	1450*1800*1150*2100
HC1822	380V,3PH/50HZ	15.3/17.9/20.6/24.5	23/26.8/30.8/36.7	>9m/min	19/20.5/22/24	1750*2000*1300*2400

Electric Winch 电动绞车

Material: 316 stainless steel/ Carbon Steel 材质：316 不锈钢 / 碳素钢







本系列绞车可带排缆器，离合器，压绳机构，防脱绳报警装置，客户可以根据实际情况选择。

This type winch can be equipped with rope -guider, Clutch, rope roller, alarm system for the last winding ropes.


容绳量为绞车的理论值，用户应该根据考虑至少保留 3 圈钢丝绳的空间，防止绳头脱出。

please left at least 3 wraps ropes space of the drum, to prevent the ropes coming off.

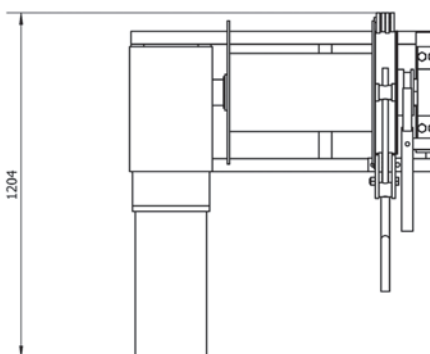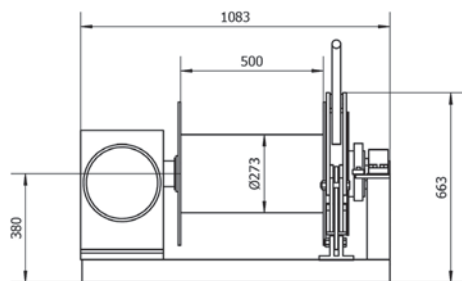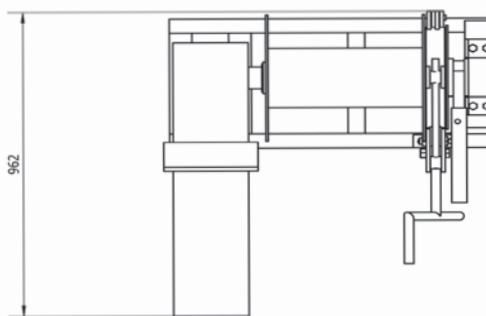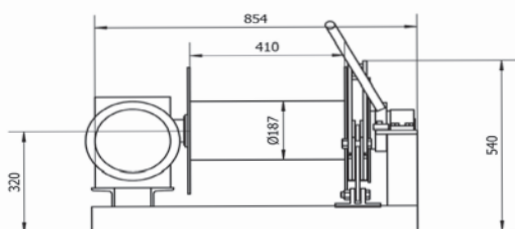

Electric Winch 电动绞车

Customized Winch for fish farm platform
振华重工海上养殖平台“振渔1号”定做绞车

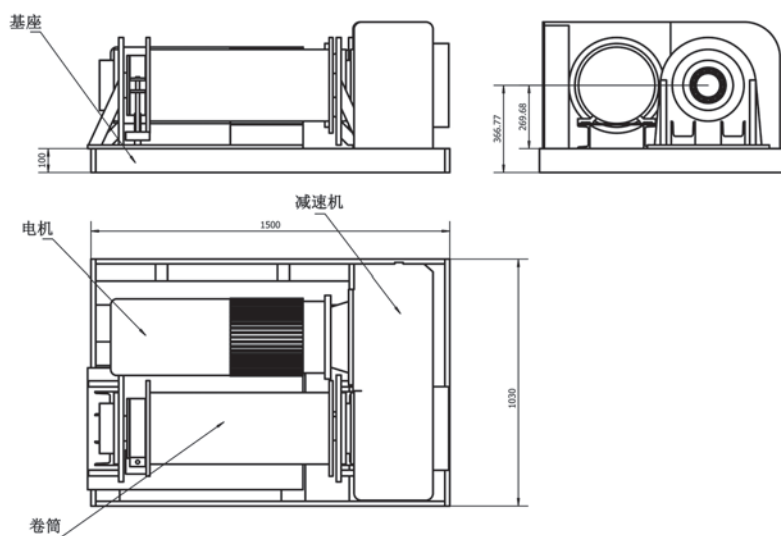


我们根据客户的要求定做各种绞车，根据客户需求设计独一无二的解决方案。
NYS is flexible to modify design according to customer needs or produce an unique solution.

小型不锈钢电动绞车 Stainless Steel Electric Winch



我们根据客户的要求定做各种绞车，根据客户需求设计独一无二的解决方案。

NYS is flexible to modify design according to customer needs or produce an unique solution.

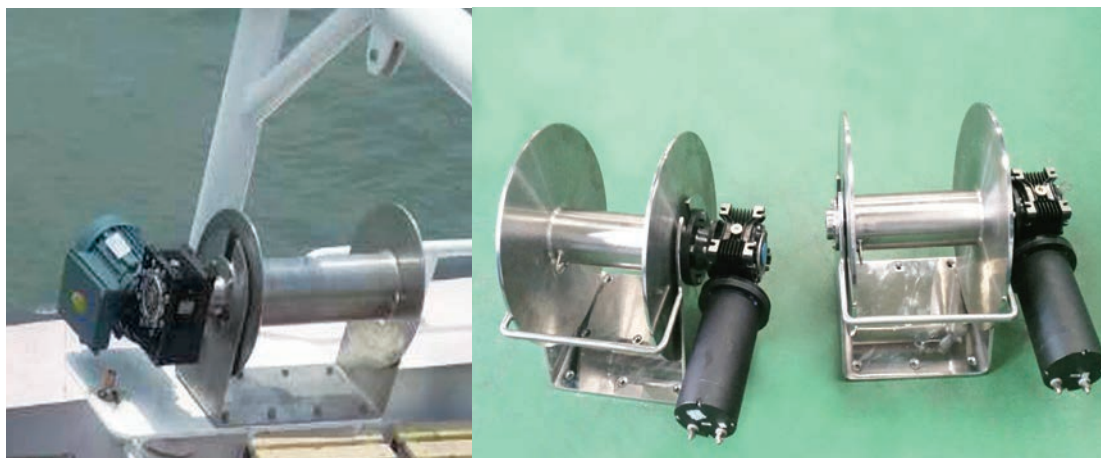

- DC 12V/24V electric motor drive.
- AC electric motor drive.
- Stainless steel 316 warping drum
- 直流 12V 或者 24V 电机驱动
- 交流电机驱动
- 316 不锈钢卷筒

HM Capstan 绞盘




Features 特点

- The HM Capstan is equipped with epicyclical gearbox, higher efficiency.
- All the outside parts of the capstan is stainless steel, fully waterproof and rustproof
- 该型号的绞盘配置的是行星轮减速机，所以更高效
- 所有外置的部件都是不锈钢材质，防水防锈

Specification 规格型号

型号 Model	净重 Net.Weight	电源供应 Power Supply	电机 Motor (W)	工作电流 AMPS@Working Load	工作负载 Working Load(kg)	最大拉力 Max.Pull(kg)	速度 Line Speed	锚绳尺寸 Rope Size
HM600	10kg	12V/24V	600W	60A/40A	90kg	180kg	16m/min	6-10mm
HM1000	14kg	12V/24V	1000W	115A/60A	100kg	230g	20m/min	8-10mm

Dimension 尺寸图


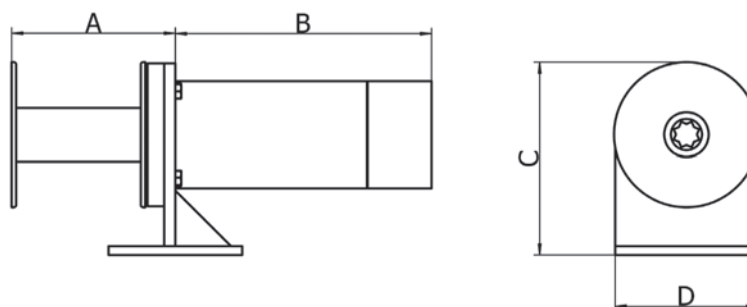


型号 MODEL	A(mm)	B(mm)	C(mm)	D(mm)
HM600	147	230	173	128
HM1000	210	270	210	128

Drum Winch 电动绞车

- Perfect Anchoring System for Fishing Boat
- Heavy Duty Motor, High speed, Silent Operation With Bearing
- Constructed from 316 marine grade stainless steel
- Simply drive the boat to where you want to fish, push a button and the anchor is I
- You can lower and retrieve your anchor rope using our winches at a rate between
- The NYS drum winch is available in a range of capacities, and there's one design
- 此系列绞车是渔船锚泊系统的绝佳选择。
- 重型电机，高速，低噪音运行
- 材质是标准船用 316 不锈钢
- 安装该系列绞车，可以去任何您想去的地方捕鱼，只需要按下按钮，船锚
- 该系列绞车会以 80-90 英尺每分钟的速度收放船锚
- NYS 绞车有多种型号供您选择，每一种的容绳量都不同，总会有一种适合您的船

Standard Drum Winch 标准绞盘

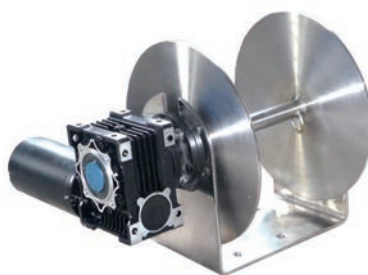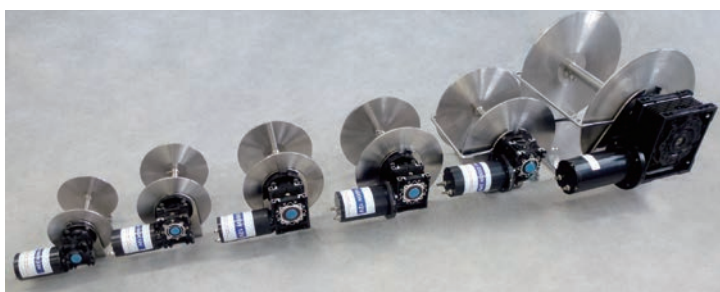


Features 特点

- The fully sealed gearbox is driven by a vertically mounted, permanent magnet motor
- Gearbox housings are marine grade alloy and drum is Stainless steel
- The speed of retrieval increases with each revolution.
- The rope and chain does not twist and tangle causing the unit to malfunction.
- The motor can be mounted at 30, 45 and 90 degrees to suit the configuration of the anchor well
- To protect the motor, the circuit breaker will trip out if there is a power overload (for example if the anchor is stuck on the bottom).
- Easily disassembled for servicing
- Fit include hand-switch and solenoid, circuit breaker
- 全封闭减速箱，立式安装，稀土电机
- 减速箱外壳材质是船用铝合金，此外卷筒标准不锈钢材质
- 设备出现故障时，绳子和链子也不会缠绕在一起或者打结
- 电机可以与水平面成 30 度，45 度或者 90 度安装，来适应不同的锚
- 如果电机过度负载（比如锚被卡在河床底部），继电器会断开来保护电机
- 拆装简单便于检修维护
- 配手动开关，换向器，断路开关

Specification 规格型号

型号 Model	净重 Weight	供电电源 Power Supply	电机 Motor	工作电流 AMPS@ Working Load	工作负载 Working Load	最大拉力 Max. Pull	建议容量 Suggested Rope length	建议锚链长度 Suggest Chain Size & length
YDW-010	11kg	12V/24V	400W	50A/30A	70kg	320kg	6mm*70m	6mm*3m
YDW-011	16kg	12V/24V	600W	70A/40A	90kg	510kg	6mm*100m	6mm*3m
YDW-012	24kg	12V/24V	1000W	100A/60A	120kg	750kg	8mm*105m	8mm*3m
YDW-013	30.5kg	12V/24V	1400W	125A/70A	145kg	900kg	8mm*170m	8mm*3m
YDW-014	42kg	12V/24V	1600W	150A/80A	170kg	980kg	10mm*260m	10mm*3m
YDW-015	115kg	24V/48V	2500W	160A/80A	210kg	1600kg	14mm*400m	12mm*3m



Dimension 尺寸图

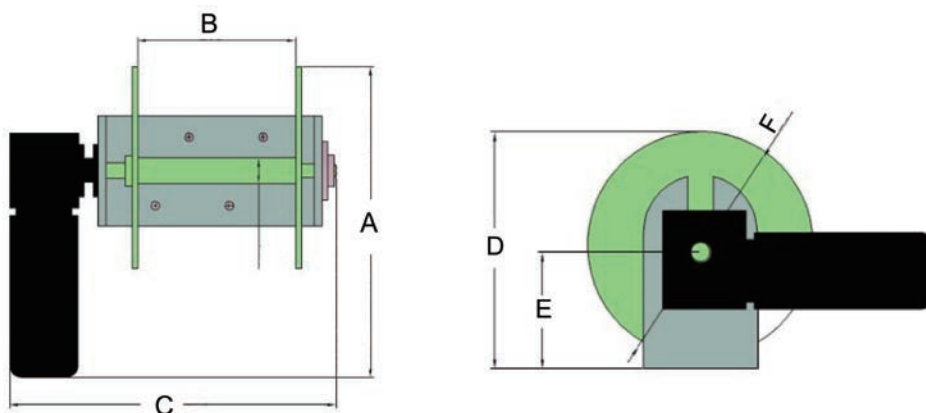

型号 Model	电机 Motor	A	B	C	D	E	F
YDW-010	400W	300	175	350	200	110	185
YDW-011	600W	335	206	376	265	140	245
YDW-012	1000W	410	208	393	310	165	290
YDW-013	1400W	450	230	423	350	180	340
YDW-014	1600W	520	260	500	420	215	400
YDW-015	2500W	705	433	722	570	295	550

NS Series Drum Winch NS 系列绞车


- The fully sealed gearbox is driven by a vertically mounted, permanent magnet motor
- Gearbox housings are marine grade alloy
- Except the gearbox, other parts of the winch are stainless steel, fully waterproof and rustproof.
- The motor can be mounted at 30,45 and 90 degrees to suit the configuration of the anchor well
- To protect the motor, the circuit breaker will trip out if there is a power overload (for example if the anchor is stuck on the bottom).
- Easily disassembled for servicing
- Fit include hand-switch, solenoid and circuit breaker
- 全封闭减速箱，立式安装，稀土电机
- 减速箱外壳材质是船用铝合金
- 除去减速箱和电机，其他部分材质均是不锈钢材质，加装电机不锈钢外壳，有极佳的防水防锈功能
- 电机可以与水平面成 30 度，45 度或者 90 度安装，来适应不同的锚
- 如果电机过度负载（比如锚被卡在河床底部），继电器会断开来保护电机
- 拆装简单便于检修维护
- 配手动开关，换向器，断路开关

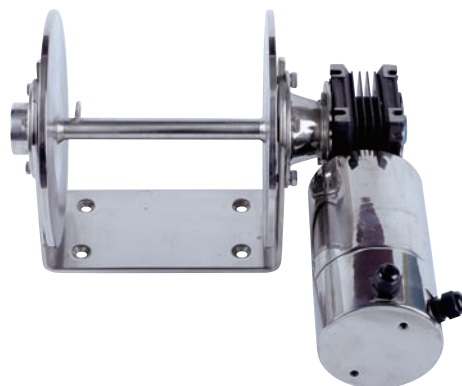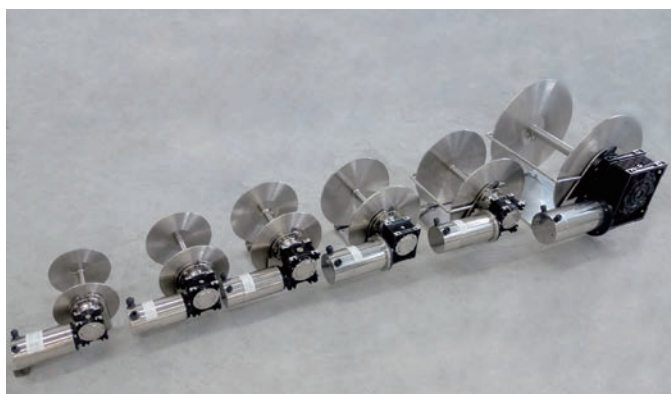

Specification 规格型号

型号 Model	净重 Weight	供电电源 Power Supply	电机 Motor	工作电流 AMPS@ Working Load	工作负载 Working Load	最大拉力 Max. Pull	建议容绳量 Suggested Rope length	建议锚链长度 Suggest Chain Size & length
YDW-010S	12.5kg	12V/24V	400W	50A/30A	70kg	320kg	6mm*70m	6mm*3m
YDW-011S	18.5kg	12V/24V	600W	70A/40A	90kg	510kg	6mm*100m	6mm*3m
YDW-012S	25.1kg	12V/24V	1000W	100A/60A	120kg	750kg	8mm*105m	8mm*3m
YDW-013S	32.5kg	12V/24V	1400W	125A/70A	145kg	900kg	8mm*170m	8mm*3m
YDW-014S	44.5kg	12V/24V	1600W	150A/80A	170kg	980kg	10mm*260m	10mm*3m
YDW-015S	119kg	24V/48V	2500W	160A/80A	210kg	1600kg	14mm*400m	12mm*3m

Dimension 尺寸图

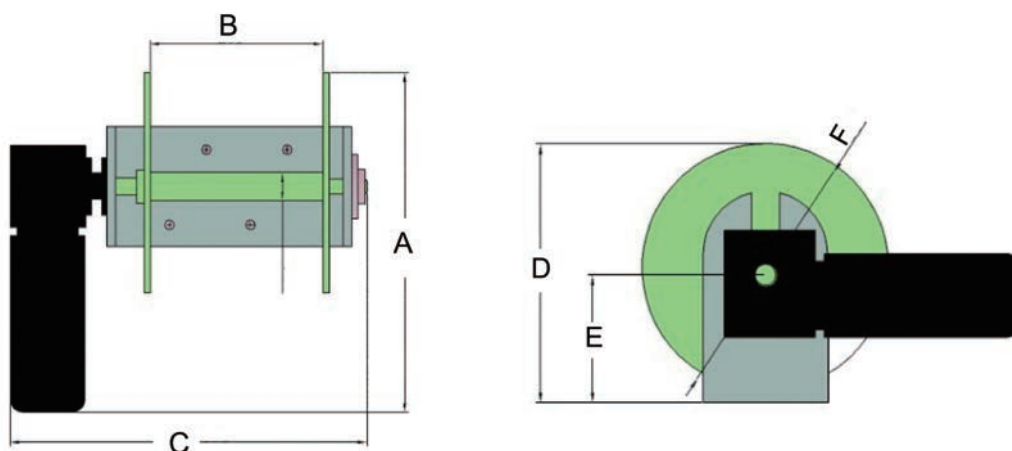

型号 Model	电机 Motor	A	B	C	D	E	F
YDW-010S	400W	320	175	350	200	110	185
YDW-011S	600W	370	206	376	265	140	245
YDW-012S	1000W	420	208	395	310	165	290
YDW-013S	1400W	480	248	450	350	180	340
YDW-014S	1600W	535	260	520	420	215	400
YDW-015S	2500W	740	433	750	570	295	550

ACCESSORIES 电控配件



HAND SWITCH
手动开关



SOLENOID
换向器



CIRCUIT BREAKER
断路开关

WS Series Drum Winch WS 系列绞车


- The fully sealed gearbox is driven by a vertically mounted, permanent magnet motor
- Gearbox housings are marine grade alloy
- Whole winch are stainless steel, fully waterproof and rustproof.
- The motor can be mounted at 30,45 and 90 degrees to suit the configuration of the anchor well
- To protect the motor, the circuit breaker will trip out if there is a power overload (for example if the anchor is stuck on the bottom).
- Easily disassembled for servicing
- Fit include hand-switch, solenoid and circuit breaker
- 全封闭减速箱，立式安装，稀土电机
- 减速箱外壳材质是船用铝合金
- 绞车整体全部不锈钢材质，完全防水防锈
- 电机可以与水平面成 30 度，45 度或者 90 度安装，来适应不同的锚
- 如果电机过度负载（比如锚被卡在河床底部），继电器会断开来保护电机
- 拆装简单便于检修维护
- 配手动开关，换向器，断路开关



Specification 规格型号

型号 Model	净重 Weight	供电电源 Power Supply	电机 Motor	工作电流 AMPS@ Working Load	工作负载 Working Load	最大拉力 Max. Pull	建议容绳量 Suggested Rope length	建议锚链长度 Suggest Chain Size & length
YDWS-010S	14.4kg	12V/24V	400W	50A/30A	70kg	320kg	6mm*70m	6mm*3m
YDWS-011S	19.9kg	12V/24V	600W	70A/40A	90kg	510kg	6mm*100m	6mm*3m
YDWS-012S	26.5kg	12V/24V	1000W	100A/60A	120kg	750kg	8mm*105m	8mm*3m
YDWS-013S	34.5kg	12V/24V	1400W	125A/70A	145kg	900kg	8mm*170m	8mm*3m
YDWS-014S	46.5kg	12V/24V	1600W	150A/80A	170kg	980kg	10mm*260m	10mm*3m
YDWS-015S	124kg	24V/48V	2500W	160A/80A	210kg	1600kg	14mm*400m	12mm*3m

Dimension 尺寸图

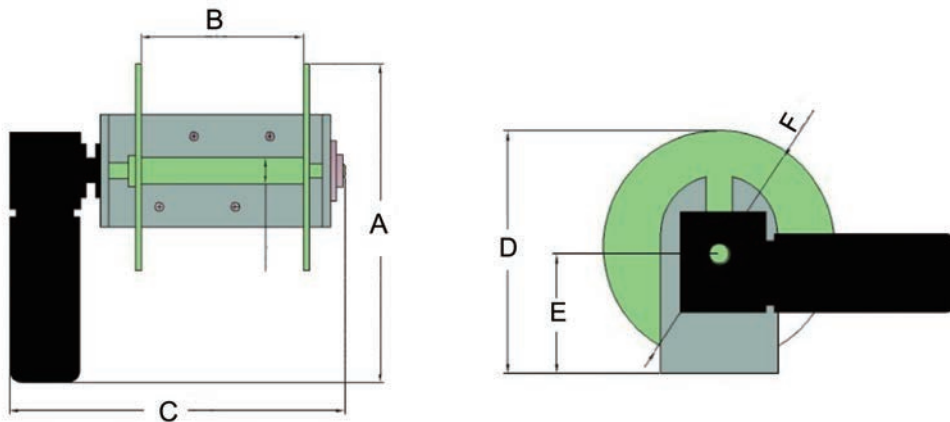

型号 Model	电机 Motor	A	B	C	D	E	F
YDWS-010S	400W	320	175	350	200	110	185
YDWS-011S	600W	370	206	376	265	140	245
YDWS-012S	1000W	420	208	395	310	165	290
YDWS-013S	1400W	480	248	450	350	180	340
YDWS-014S	1600W	535	260	520	420	215	400
YDWS-015S	2500W	740	433	750	570	295	550

Free Fall Series 手动离合电动绞车

- No need to tie off your rope at anchorage.
- The speed of retrieval increases with each revolution.
- All rope and chain is spooled on and off the drum at a rate of 80 and 90ft per minute
- The rope and chain does not twist and tangle causing the unit to malfunction.
- With the flick of a switch the anchor is raised and lowered.
- The NYS winch will freefall at up to 600 feet/minute which is a real advantage when you fish in depths greater than 20 meters. Also the drum can only free spool whilst there is weight pulling down so once the anchor hits the seabed the drum will automatically stop which totally eliminates the risk of an over run which happens when too much rope is spooled out when anchoring.
- 抛锚的时候无需把锚绳解下
- 每缠绕一圈，回收绳子的速度也会越来越快
- 绞车会以 80 和 90 英尺每分钟的速度收放锚绳和锚链
- 设备出现故障时，绳子和链子也不会缠绕在一起或者打结
- 只需要轻按开关轻松收放船锚
- 当您在水深超过 20 米的水域捕鱼时，离合绞车会以 600 英尺 / 每分钟的速度自由落体。绞车只有在负重情况下离合装置才会起作用，当锚接触河床绞车就会停止运转，所以抛锚的时候不会有太多多余的绳子脱开。



Other OPTIONS 其他配置选择


Whole 316 stainless steel free fall drum winch also available
整体不锈钢手动离合绞盘



Specification 规格型号

型号 Model	净重 Weight	供电电源 Power Supply	电机 Motor	工作电流 AMPS@ Working Load	工作负载 Working Load	最大拉力 Max. Pull	建议容绳量 Suggested Rope length	建议锚链长度 Suggest Chain Size & length
YDW-011F	19.5kg	12V/24V	600W	70A/40A	90kg	510kg	6mm*100m	6mm*3m
YDW-012F	27.5kg	12V/24V	1000W	100A/60A	120kg	750kg	8mm*105m	8mm*3m
YDW-013F	34.5kg	12V/24V	1400W	125A/70A	145kg	900kg	8mm*170m	8mm*3m
YDW-014F	47kg	12V/24V	1600W	150A/80A	170kg	980kg	10mm*260m	10mm*3m
YDW-015F	125kg	24V/48V	2500W	160A/80A	210kg	1600kg	14mm*400m	12mm*3m

Dimension 尺寸图

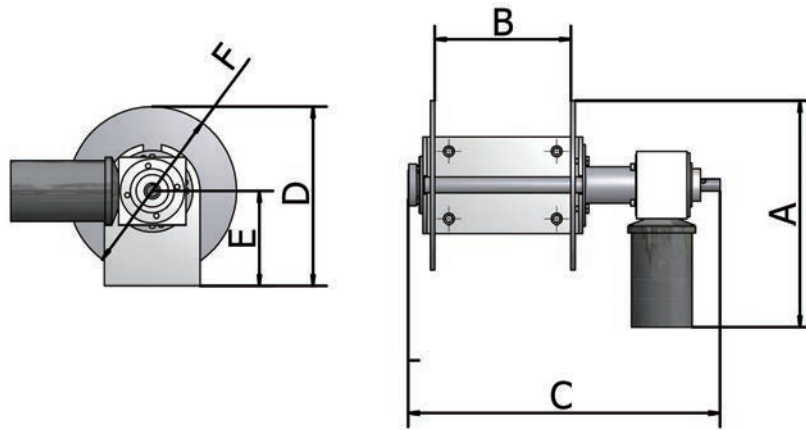

型号 Model	电机 Motor	A	B	C	D	E	F
YDW-011F	600W	370	206	435	265	140	245
YDW-012F	1000W	420	208	448	310	165	290
YDW-013F	1400W	480	248	478	350	180	340
YDW-014F	1600W	535	260	560	420	215	400
YDW-015F	2500W	740	433	770	570	295	550

Free Fall DS Series 电动离合电动绞车 DS 系列

- No need to tie off your rope at anchorage.
- The speed of retrieval increases with each revolution.
- All rope and chain is spooled on and off the drum at a rate of 80 and 90 ft per minute
- The rope and chain does not twist and tangle causing the unit to malfunction.
- Press the clutch switch, just loosen the clutch and the anchor will be free fall drop. Once you wish to raise the anchor, just power down the clutch switch and then press the winch clutch "UP" bottom.
- The NYS winch will freefall at up to 600 feet/minute which is a real advantage when you fish in depths greater than 20 meters. Also the drum can only free spool whilst there is weight pulling down so once the anchor hits the seabed the drum will automatically stop which totally eliminates the risk of an over run which happens when too much rope is spooled out when anchoring.
- 抛锚的时候无需把锚绳解下
- 每缠绕一圈，回收绳子的速度也会越来越快
- 绞车会以 80 和 90 英尺每分钟的速度收放锚绳和锚链
- 设备出现故障时，绳子和链子也不会缠绕在一起或者打结
- 当你想使用离合功能快速放锚的时候，只需要按下离合器开关，锚会快速自由落下完成抛锚工作。当你需要收锚时候，关掉离合开关，按下绞车“UP”按钮即可。
- 当您在水深超过 20 米的水域捕鱼时，离合绞车会以 600 英尺 / 每分钟的速度自由落体。绞车只有在负重情况下离合装置才会起作用，当锚接触河床绞车就会停止运转，所以抛锚的时候不会有太多多余的绳子脱开。



ACCESSORIES 电控配件



HAND SWITCH
手动开关



SOLENOID
换向器




CIRCUIT BREAKER
断路开关

Specification 规格型号

型号 Model	净重 Weight	供电电源 Power Supply	电机 Motor	工作电流 AMPS@ Working Load	工作负载 Working Load	最大拉力 Max. Pull	建议容绳量 Suggested Rope length	建议锚链长度 Suggest Chain Size & length
YDW-011FS	23.5kg	12V/24V	600W	70A/40A	90kg	510kg	6mm*100m	6mm*3m
YDW-012FS	31.5kg	12V/24V	1000W	100A/60A	120kg	750kg	8mm*105m	8mm*3m
YDW-013FS	38.5kg	12V/24V	1400W	125A/70A	145kg	900kg	8mm*170m	8mm*3m
YDW-014FS	51kg	12V/24V	1600W	150A/80A	170kg	980kg	10mm*260m	10mm*3m
YDW-015FS	133kg	24V/48V	2500W	160A/80A	210kg	1600kg	14mm*400m	12mm*3m

Dimension 尺寸图

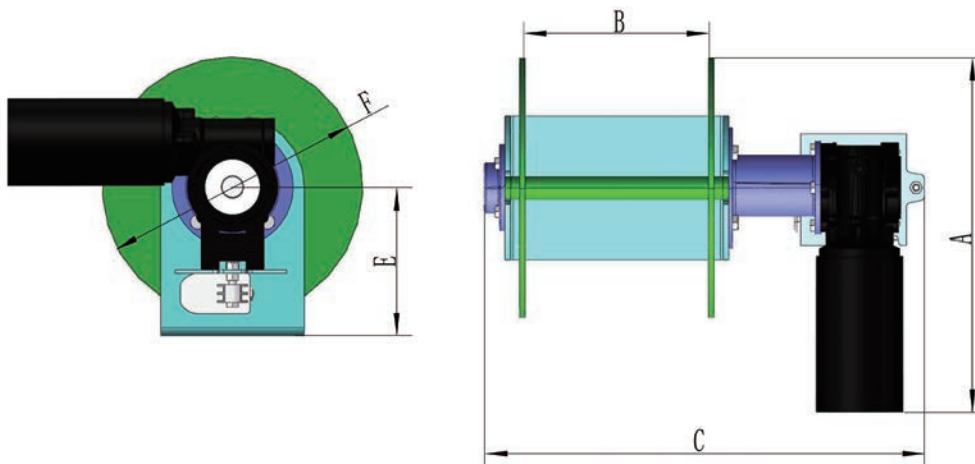

型号 Model	电机 Motor	A	B	C	D	E	F
YDW-011FS	600W	370	202	446	265	140	245
YDW-012FS	1000W	420	208	463	310	165	290
YDW-013FS	1400W	480	248	493	350	180	340
YDW-014FS	1600W	535	260	570	420	215	400
YDW-015FS	2500W	740	433	792	570	295	550


Tender Winch TW400 & TW600 绞盘

- This type winch are designed to recover a small tender and jet ski
- With heavy duty, waterproof motor and gear box
- high-class gear box can withstand the high stress
- Stainless steel drum ,base and shaft
- 这款绞盘专门为小型供应船和摩托艇设计
- 配置重型防水电机和减速箱
- 高质量的减速箱可以承受高强度的工作压力
- 不锈钢卷筒，底座和主轴



Specification 规格型号

型号 Model	净重 Weight	供电电源 Power Supply	电机 Motor	工作电流 AMPS@ Working Load	工作负载 Working Load	最大拉力 Max. Pull	速度 Speed	建议锚绳尺寸 Suggestion Rope Size
TW400	10kg	12V/24V	400W	50A/30A	70kg	320kg	20m/min	6~10mm
TW600	13kg	12V/24V	600W	70A/40A	90kg	510kg	20m/min	8~10mm

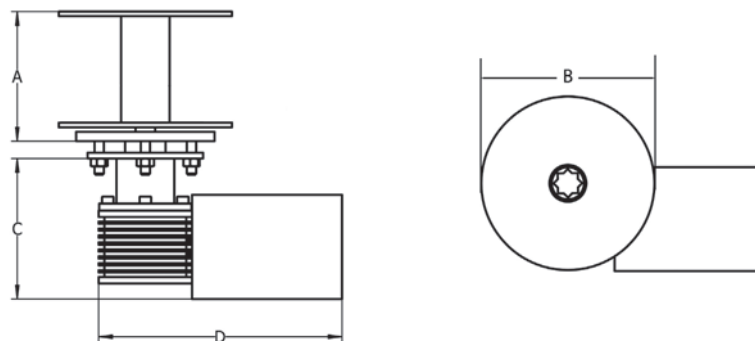

Dimension 尺寸图

型号 Model	电机 Motor	A(MM)	B(MM)	C(MM)	D(MM)
TW400	400W	120	150	125	230
TW600	600W	135	180	125	260




WINCH



- White or black ABS housing
- The parts inside are made of stainless steel or carbon steel.
- The drum can hold 5mm*50meters or 6mm*38 meters
- With clutch and can operated by hand switch
- Totally sealed motor and gearbox
- Simple deck mounted installation with no under deck parts, and the housing is removable.
- Fit hand switch and remote control

- 外壳为 ABS 材料
- 内部材料分不锈钢和碳钢两种材料
- 可以容纳 5mm 绳子 50 米 或者 6mm 绳子 38 米
- 带离合装置，可以用手动开关控制
- 全封闭式涡轮蜗杆减速箱
- 安装简单，没有需要安装在甲板以下的部件，外壳可拆卸。
- 使用时也可以不带外壳
- 配置手动开关，遥控

型号 Model	净重 N.W.	电源供电 Power Supply	电机 Motor	最大拉力 Max Pull	速度 Speed	容绳量 Rope Capacity
YDG-300	6Kg	12V	200W	50Kg	25m/min	6mm*38m/5mm*50m

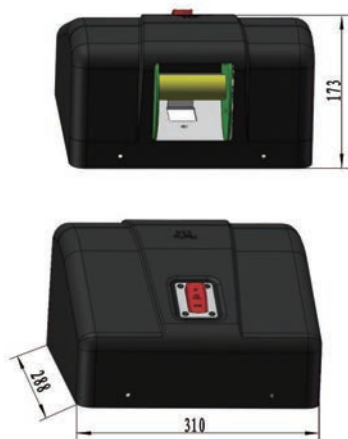

船用小型吊装机 Line hauler/Pot Puller




大扭矩 12V 或者 24V 直流电机驱动，该吊机可以在最小的助力下吊起 150Kg 的龙虾，鲈鱼或者螃蟹笼。高质量滑轮，全密封电机，整体不锈钢框架，可轻松折叠以便快速存放。因为它非常强大且易于使用，所以你可以单独去钓鱼，用容易的方式拖拽那些美味的甲壳类动物。绝对是您用来捕龙虾的理想选择。

This line hauler runs on 12V or 24V power with a lift capacity of 150KgS of lobster, prawn or crab traps, end weights, anchors. Runs quiet, stores easily. It's so powerful and easy to use, you can go fishing alone, you can haul loads of those scrumptious crustaceans easily.

ELECTRIC ACCESSORIES 电 控 配 件

NYS CONTROL PANNEL NYS

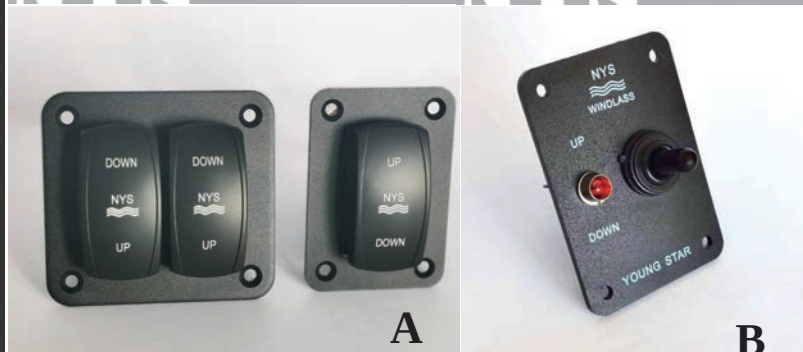

Easy to use, panel- mounted Up/ Down switch for windass & winch operation, A type and B type option. Suitable for 12V/24V DC use.

使用简单，面板安装方式，A 和 B,2 种类型供您选择，适用于直流 12V/24 设备

NYS HAND SWITCH



An easily installed watertight handheld control. Completely maintenance free with one meter cable.

安装简单，防水手动开关，带 1 米线缆

NYS FOOT SWITCH



Perfect watertight and simple operation by your foot. UP & DOWN switch with a safety cover to prevent accidental push button operation. Control bottom made by sea water resistant rubber. Available in white and black.

水密，可以简单用脚轻轻踩踏来操作锚机 或者绞车正反转。操作按钮有保护盖，可以防止错误操作。操作按钮由海水防腐的橡胶制造。开关有黑色和白色可供选择

NYS

SOLENOID



Solenoid is control device for DC 12V/24V motor, and can be used along with switches.

换向器适用于 12V/24V 直流电机，一般配合开关使用来控制锚机 / 绞车电机正反转

NYS

Remote Control



Remote control have two types, wired and wireless. With a wireless remote control installed, you will have full control of windlass anywhere on deck. The control consists of a transmitter and a receiver.

遥控开关有无线也有线两种，无限遥控器可以在甲板任何位置自由控制锚机，遥控器包含一个发送器一个信号接收器

NYS

Circuit Breaker




Protects the electric motor from overcharge and short circuit. It's available in different version, 50A, 80A, 100A, 120A, 150A, power supply DC 12V/24V

断路器可以在超载或者是短路的情况下断开电路，保护电机不被烧坏。有多个不同型号可供选择，从 50A 到 150A，适用于直流 12V/24V 电机。

NYS

Remote Control

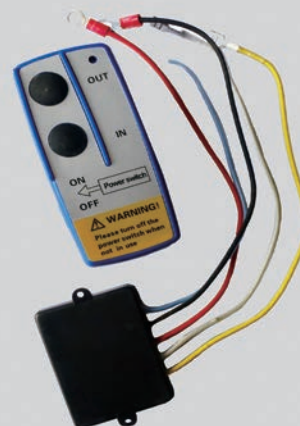

With a wireless remote control, you will have full control of windlass anywhere on deck. The control consists of a transmitter and a receiver.

遥控开关有无线也有线两种，无限遥控器可以在甲板任何位置自由控制锚机，遥控器包含一个发送器一个信号接收器

NYS

Control Box & Master Controller



This marine control box can control the starting braking, running, back running, change speed and protection of three-phase pole-change multi-speed motors for driving machines, such as windlasses, warping capstan and mooring winches with the cooperation of the marine master controller. The rated voltage of the Control Box & master controller is 380V or 440V. The protection grade is IP56.

Application:

1. Temperatures: -25°C — $+45^{\circ}\text{C}$
2. There are dewdrops alt-dog and oil fog
3. There are shck and vibration periodical vibration: ± 22.5 transverse slope: ± 22.5

该系列船用控制箱与以下船用主令控制器配合使用于控起锚机或起锚绞盘，系泊绞车等交流变极变速异步电机的启动，制动，正反转变速的同时保护电机。

该系列电控箱以及主令控制器适用于 380V/50HZ, 440V/60HZ 两种电制，防护等级 IP56

应用范围：

1. 环境温度： -25°C — $+45^{\circ}\text{C}$
2. 海上潮湿空气，油雾，盐雾
3. 承受船舶营运时的振动和冲击，倾斜摇摆均不大于 22.5



NYS

Control Switch



Application 应用范围：

1. Temperatures: -25°C — $+45^{\circ}\text{C}$
2. There are dewdrops alt-dog and oil fog
3. There are shck and vibration periodical vibration: ± 22.5 transverse slope: ± 22.5

The rated voltage of the Control switch is 380V or 440V. The protection grade is IP56.

1. 环境温度 -25°C — $+45^{\circ}\text{C}$
 2. 海上潮湿空气，油雾，盐雾
 3. 承受船舶营运时的振动和冲击，倾斜摇摆均不大于 22.5
- 该系列手持按钮盒适用于 380V/50HZ, 440V/60HZ 两种电制，防护等级 IP56

Baittrap 鱼饵笼

The seal proof bait cage is made of stainless steel which protects your bait from seals and other predators. The lid can be opened for easy baiting and cleaning

密封防诱饵陷阱是由不锈钢制成的，可以保护你的诱饵不受海豹和其他捕食者的伤害。盖子可以打开，方便下饵和清洗。



Dimension 尺寸图

Model 型号	A(mm)	B(mm)
BT-001	160	280
BT-002	160	402

Rake 鱼耙

Dimension 尺寸图

Model 型号	A(mm)	B(mm)	C(mm)	D(mm)
RK-001	200	750	100	100
RK-002	200	750	100	100

Trim Tab Systems 压浪器

Haipu marine equipment Co.,Ltd produce a series of Trim Tabs kits.Haipu trim tabs designed to make your ship time more safer,smoother, with good durability and long service life. . Actuators are made of anti-corrosion,anti-aging nylon material. Tab plate and mounting hardware are made of 316 stainless steel .The Actuators are available in 12V and 24V DC.

海普生产一系列压浪器，我们的设计具有很好的耐用性和较长的使用寿命的同时，可以让您的航行更安全，平稳。执行器外壳使用材料为耐老化，耐腐蚀的尼龙材质。压浪板以及安装五金使用 316 不锈钢材质。


执行器有直流 12V 和 24V 可以选择。




型号 Parts No.	长 * 宽 L"×W"(in)	船长 Boat Length (ft)	执行器数量 / 压浪板 Actuators per tab plate
TA-YD601	9" × 8"	12-16	1
TA-YD602	9" × 10"	14-18	1
TA-YD603	10" × 12"	16-25	1
TA-YD604	10" × 16"	20-30	1
TA-YD605	10" × 20"	26-40	2
TA-YD606	10" × 25"	30-50	2
TA-YD607	10" × 30"	35-60	2
TA-YD608	12" × 16"	25-35	2
TA-YD609	12" × 25"	30-42	2




Several mounting types for your options 多种安装样式供您选择

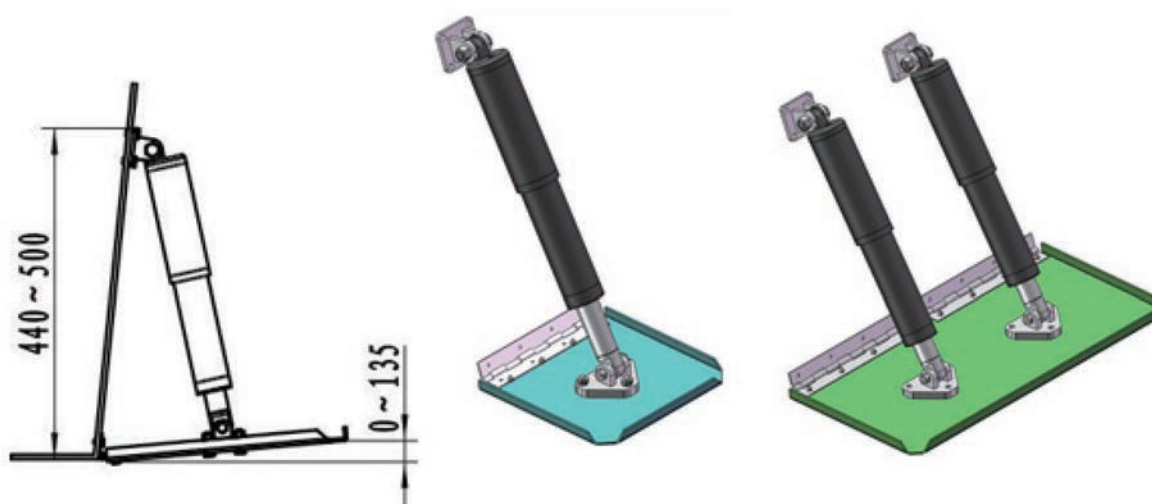

压浪板边缘安装型 Edge mount series

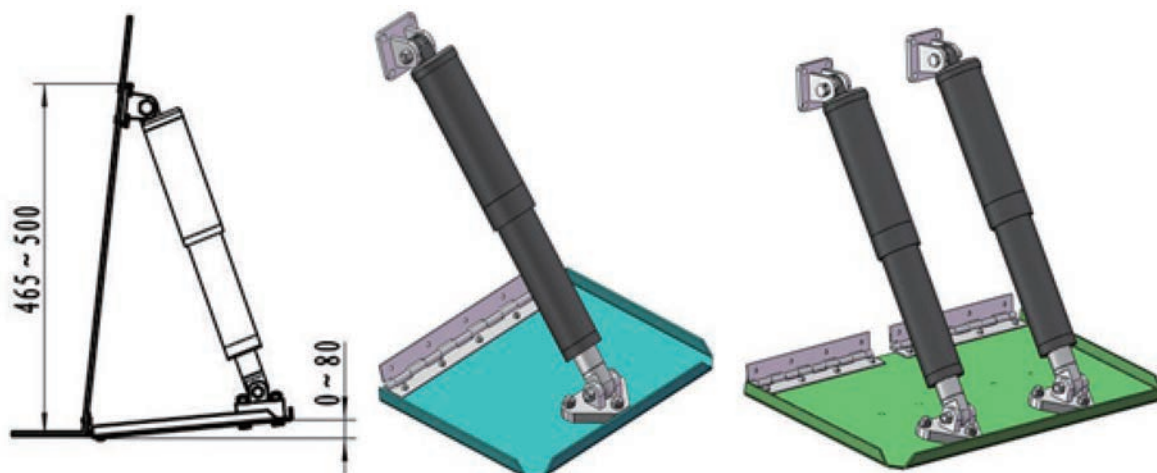

All the Tab plates and mounting hardware can be customized according to your need.
所有压浪板以及安装五金都可以根据客户要求来定制

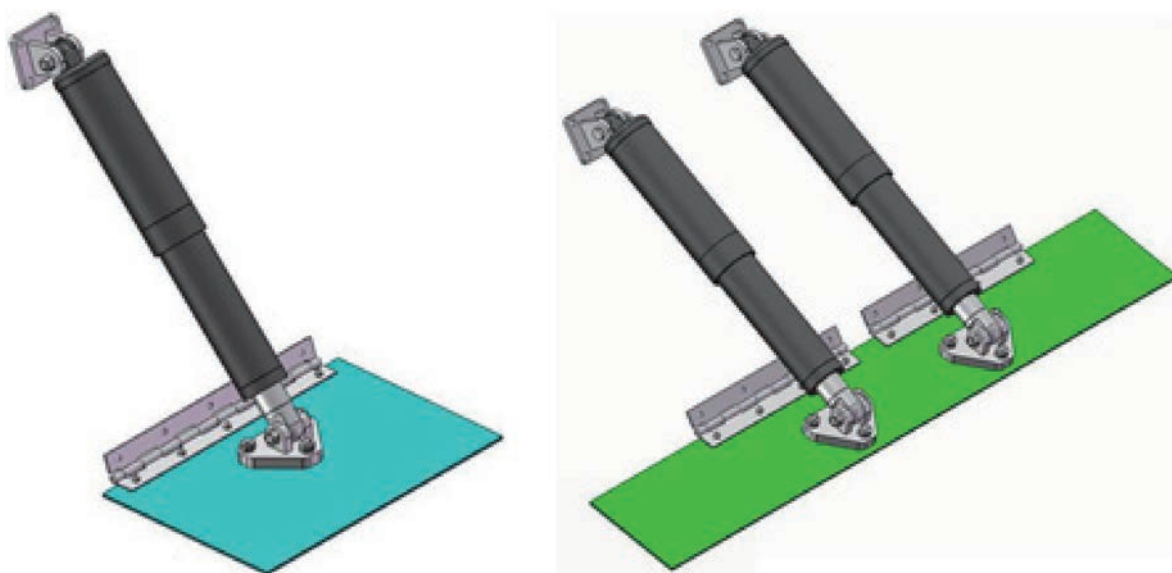


ANCHORING

With over 15 years experience in producing anchors, New Young Star have developed a full range of anchoring accessories. Each range is available in different size to suit boats from 4 meters to 80 meters.

Available in hot dipped galvanized and high polished stainless steel AISI 316.

新营大金属制品有限公司已经有超过15年生产船锚的经验，研发了多种锚型。每一种锚型有多种规格可供选择，可以配套长度4米到80米的各种船型。

除316不锈钢材质外，您还可以选择碳钢热镀锌材质
其中许多锚型都可以做400kg 以下的任何规格重量

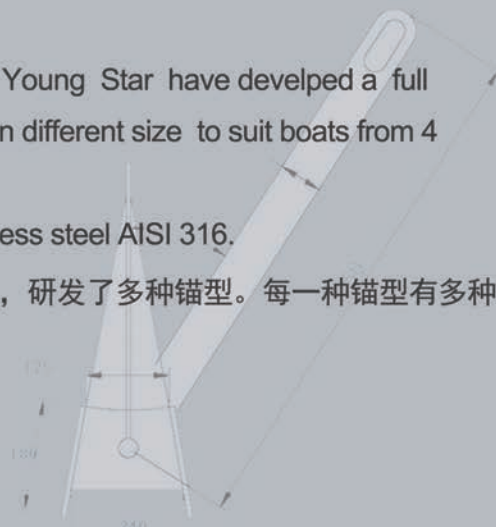

Delta Anchor 劳伦斯锚


The high-grade 316 stainless steel used in the construction of the Delta anchor gives it maximum tensile strength. The low centre of gravity and self-righting geometry ensure that the Delta anchor will set immediately. Available in hot dipped galvanized and in high polished stainless steel AISI 316

★ This type anchor can customized less than 250kg.

劳伦斯锚材质为高质量 316 不锈钢材质，有很强的拉伸强度。重心比较低，同时可以自动扶正的几何外形，使得劳伦斯锚可以快速安置。除 316 不锈钢材质外，您还可以选择碳钢热镀锌材质

★该款锚型可以做 250kg 以下的任何重量规格

Stainless steel Part No 不锈钢型号	Galvanized Part No 热镀锌型号	Weight (kg) 重量	L(mm)	H(mm)	W(mm)
YDT-005S	YDT-005C	5	555	250	220
YDT-007S	YDT-007C	7.5	625	300	270
YDT-010S	YDT-010C	10	665	310	300
YDT-015S	YDT-015C	15	755	350	330
YDT-020S	YDT-020C	20	830	370	390
YDT-030S	YDT-030C	30	970	400	450
YDT-040S	YDT-040C	40	1100	430	490
YDT-050S	YDT-050C	50	1175	450	520
YDT-063S	YDT-063C	63	1270	520	565
YDT-080S	YDT-080C	80	1350	600	605
YDT-100S	YDT-100C	100	1500	750	700

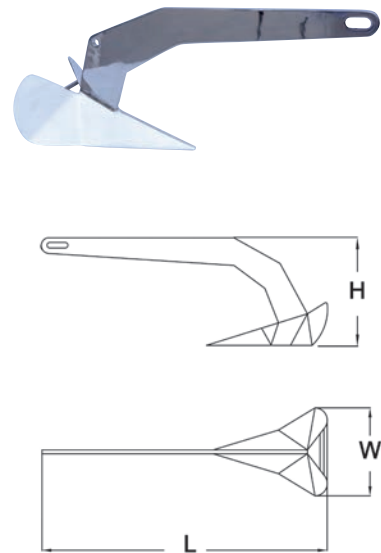


Bruce Anchor 布鲁斯锚

Sets fast and secure to almost any bottom conditions. Cast in a single piece. Available in hot dipped galvanized steel and stainless steel AISI 316

安置速度快，适用于各种河床底面一体铸造成型，材质有碳钢热镀锌和 316 不锈钢两种

Stainless steel Part No 不锈钢型号	Galvanized Part No 热镀锌型号	Weight (kg) 重量	L(mm)	H(mm)	W(mm)
YDB-005S	YDB-005C	5	460	305	260
YDB-007S	YDB-007C	7.5	535	350	305
YDB-010S	YDB-010C	10	585	390	340
YDB-015S	YDB-015C	15	665	440	410
YDB-020S	YDB-020C	20	730	500	420
YDB-030S	YDB-030C	30	826	525	450
YDB-035S	YDB-035C	35	920	480	560
YDB-040S	YDB-040C	40	890	480	620
YDB-050S	YDB-050C	50	1010	500	690
YDB-080S	YDB-080C	80	1080	548	700
YDB-100S	YDB-100C	100	1135	560	770

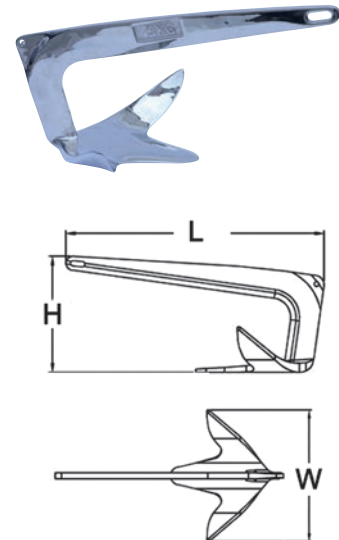

Danforth Anchor 丹佛斯锚

Offer proven holding power and is designed to penetrate sand, mud and grassy bottoms.

Arc welded, the over sides flukes pivot downward into the bottom to set fast.

Available in hot dipped galvanized steel and stainless steel AISI 316.

★ This type anchor can customized less than 400kg.




抓力大是丹佛斯锚的一大特点，适合各种河床底面，比如沙底，泥底，甚至草底。

电弧焊接工艺，锚爪可以随轴转动，可以快速插入河床底部。

除 316 不锈钢材质外，您还可以选择碳钢热镀锌材质。

★该款锚型可以做 400kg 以下的任何重量规格。

Stainless steel Part No 不锈钢型号	Galvanized Part No 热镀锌型号	Weight 重量 (kg)	L(mm)	H(mm)	W(mm)
YDF-002S	YDF-002C	5	440	650	155
YDF-003S	YDF-003C	7.5	550	690	160
YDF-005S	YDF-005C	10	600	740	190
YDF-012S	YDF-012C	12	650	765	210
YDF-015S	YDF-015C	15	700	880	215
YDF-016S	YDF-016C	20	740	920	230
YDF-027S	YDF-027C	30	830	1050	270
YDF-034S	YDF-034C	40	890	1100	290
YDF-050S	YDF-050C	50	910	1150	300
YDF-075S	YDF-075C	75	1000	1300	320
YDF-100S	YDF-100C	100	1100	1400	350

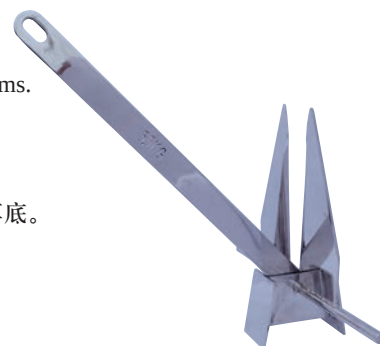

Folding Anchor 折叠锚


Folding anchor is ideal for small boats or inflatable boats. This anchor is easy to fold out and unfold and stow away.

★ Available in hot dipped galvanized steel and 316 stainless steel

折叠锚适合小船和气垫船。该锚易折叠和收锚。

★除 316 不锈钢材质外，您还可以选择碳钢热镀锌材质。

Stainless steel Part No 不锈钢型号	Galvanized Part No 热镀锌型号	Weight 重量 (kg)	A(mm)	B(mm)	C(mm)
YDFL-000S	/	0.7	200	90	47
YDFL-001S	YDFL-001C	1.5	305	135	54
YDFL-002S	YDFL-002C	2.5	360	156	59
YDFL-003S	YDFL-003C	3.2	420	174	73
YDFL-005S	YDFL-005C	5	470	210	80
YDFL-006S	YDFL-006C	6	545	222	85
YDFL-008S	YDFL-008C	8	585	240	90
YDFL-010S	YDFL-010C	0	650	260	102
/	YDFL-012C	12	840	326	102



Plow Anchor 犁锚

Plow anchor is a high holding power anchor. The hinged shank delivers consistent setting and holding even in the very worst conditions,

Available in hot dipped galvanized steel and stainless steel AISI 316.

★ This type anchor can customized less than 250kg.


犁锚抓力大，锚柄与锚头以铰链连接，即使在恶劣条件也可以抓住河底。

除 316 不锈钢材质外，您还可以选择碳钢热镀锌材质。

★ 该款锚型可以做 250kg 以下的任何重量规格。



Stainless steel Part No 不锈钢型号	Galvanized Part No 热镀锌型号	Weight 重量 (kg)	A(mm)	B(mm)	C(mm)	D(mm)
YDP-005S	YDP-005C	5	510	340	260	220
YDP-007S	YDP-007C	7	560	380	270	230
YDP-009S	YDP-009C	9	600	375	280	250
YDP-012S	YDP-012C	12	660	430	340	300
YDP-016S	YDP-015C	16	730	490	370	330
YDP-022S	YDP-022C	22	700	550	360	360
YDP-027S	YDP-027C	27	780	600	460	390
YDP-034S	YDP-035C	34/35	860	710	550	440
YDP-050S	YDP-050C	50	950	740	540	470
YDP-080S	YDP-080C	80	1150	790	570	500
YDP-100S	YDP-100C	100	1500	800	700	660

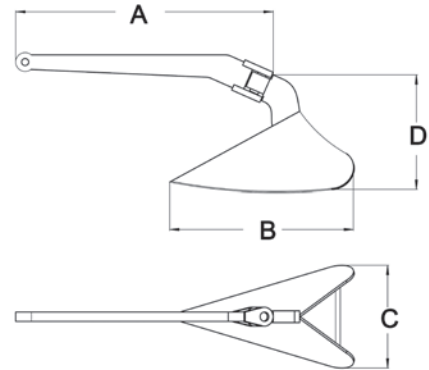

Wing Anchor 三角锚

Wing anchors are exceptionally effective in a variety of sea beds.

Work very well with NYS bow rollers. Remains stable in various tidal conditions.

Available in hot dipped galvanized and in high polished stainless steel AISI 316.

★ This type anchor can customized less than 250kg.


三角锚适合各种河床，可以和 NYS 锚支架配合使用。在各种条件下，抛锚时都比较稳定。

除 316 不锈钢材质外，您还可以选择碳钢热镀锌材质。

★ 该款锚型可以做 250kg 以下的任何重量规格。



Stainless steel Part No 不锈钢型号	Galvanized Part No 热镀锌型号	Weight 重量 (kg)	L(mm)	H(mm)	W(mm)
YDD-005S	YDD-005C	5	560	245	205
YDD-007S	YDD-007C	7.5	625	250	240
YDD-010S	YDD-010C	10	660	280	280
YDD-015S	YDD-015C	15	730	310	315
YDD-020S	YDD-020C	20	870	390	350
YDD-030S	YDD-030C	30	980	420	370
YDD-050S	YDD-050C	50	1210	610	490
YDD-075S	YDD-075C	75	1400	800	600
YDD-100S	YDD-100C	100	1500	900	700

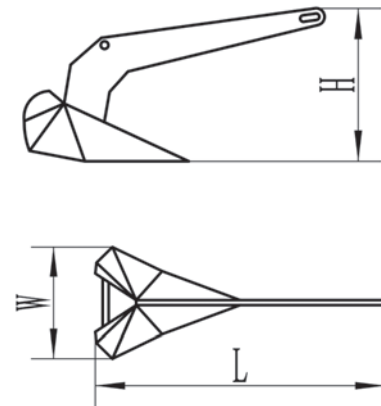


Shovel Anchor 沙沃尔锚

Shovel anchors available in hot dipped galvanized and in high polished stainless steel AISI 316.

沙沃尔锚除了 316 不锈钢材质外，您还可以选择碳钢热镀锌材质




Stainless steel Part No 不锈钢型号	Galvanized Part No 热镀锌型号	重量 weight (kg)	W(mm)	L(mm)	H(mm)
YDS-006S	YDS-006C	6	550	270	340
YDS-007S	YDS-007C	7.5	585	300	360
YDS-010S	YDS-010C	10	630	335	400
YDS-015S	YDS-015C	15	690	370	435
YDS-020S	YDS-020C	20	760	395	470
YDS-030S	YDS-030C	30	880	410	495



Slip Ring Anchor 滑环锚

Galvanized Part No 热镀锌型号	Weight 重量 (LB)	W(mm)	H(mm)	E(mm)
YDV005C	5LB	380	425	100
YDV007C	7LB	415	450	115
YDV010C	10LB	455	490	130
YDV012C	12LB	485	520	145
YDV014C	14LB	515	545	160
YDV015C	16LB	530	572	180
YDV018C	18LB	575	610	200
YDV024C	24LB	710	810	240

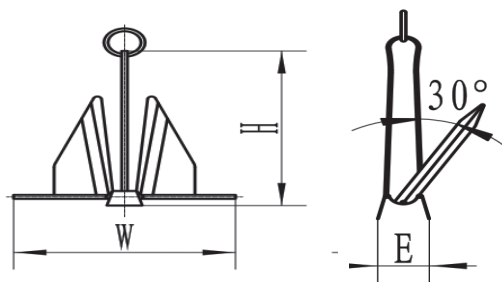

Stock Anchor 双臂锚

Stainless steel Part No 型号	Weight 重量 (kg)	Length(mm)	Width(mm)
Y9805C	5	580	340
Y9810C	10	745	520
Y9812C	12	790	530
Y9815C	15	815	570
Y9820C	20	870	630
Y9825C	25	902	690
Y9835C	35	1020	800





Grapnel Anchor 五爪锚

Grapnel anchors available in hot dipped galvanized and stainless steel 316.

五爪锚除了 316 不锈钢材质外，您还可以选择碳钢热镀锌材质

Stainless steel Part No 不锈钢型号	Galvanized Part No 热镀锌型号	Weight 重量 (kg)	A(mm)	B(mm)	C(mm)	D(mm)
YDL-002S	YDL-002C	2kg	530	185	80	16
YDL-003S	YDL-003C	3kg	600	210	80	16
YDL-004S	YDL-004C	4kg	640	235	90	16
YDL-006S	YDL-006C	6kg	650	250	90	16
YDL-008S	YDL-008C	8kg	710	265	90	16

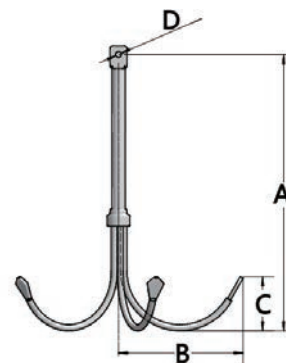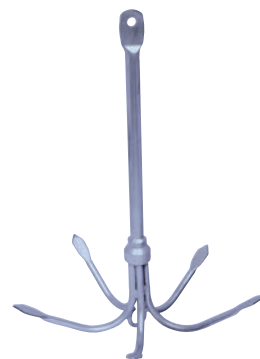

Pool Anchor

CB/T 3221-2008 N 型波尔锚

Pool anchor is a high holding power anchor. The hinged shank delivers consistent setting and holding even in the very worst conditions, whatever the changes in wind and current. Available in hot dipped galvanized & painted steel and stainless steel AISI 316.

★ This type stainless steel anchor can customized less than 500kg

★ Certification: LR, BV, DNV-GL, CCS, etc.




波尔锚是一种大抓力锚型，锚柄与锚头以铰链连接，即使在大风或者浪大的恶劣条件也可以抓住河底。

除 316 不锈钢材质外，您还可以选择碳钢材质表面热镀锌或者表面刷漆。

★该款不锈钢锚型可以做 500kg 以下的任何重量规格，碳钢材质的波尔锚可以提供 LR, BV, DNV-GL, CCS 等各大船级社证

Stainless steel Part No 不锈钢型号	Steel Part No 碳钢型号	Weight 重量 (kg)	H(mm)	H1(mm)	H2(mm)	L(mm)	L1(mm)	L2(mm)
YDL-012S	YDL-012C	12	385	250	65	325	275	155
YDL-020S	YDL-020C	20	455	300	75	385	325	185
YDL-040S	YDL-040C	40	570	370	95	480	410	235
YDL-060S	YDL-060C	60	655	425	110	555	470	270
YDL-080S	YDL-080C	80	720	470	120	610	515	295
YDL-100S	YDL-100C	100	775	505	130	655	555	320
YDL-120S	YDL-120C	120	825	540	135	700	595	340
YDL-135S	YDL-135C	135	856	562	139	723	614	342
YDL-180S	YDL-180C	180	943	618	153	796	676	377
YDL-160S	YDL-160C	225	1015	666	165	858	729	406
YDL-270S	YDL-270C	270	1079	708	75	911	774	431
YDL-315S	YDL-315C	315	1136	745	184	959	815	454
YDL-360S	YDL-360C	360	1188	779	193	1003	852	475
YDL-430S	YDL-430C	430	1260	826	204	1064	904	504
YDL-495S	YDL-495C	495	1321	866	214	1115	948	528
	YDL-585C	585	1396	916	226	1179	1002	558
	YDL-675C	675	1464	960	237	1237	1051	585
	YDL-765C	765	1527	1001	248	1290	1096	610
	YDL-855C	855	1584	1039	257	1338	1137	633
	YDL-970C	970	1653	1084	268	1396	1186	660
	YDL-1080C	1080	1713	1123	278	1447	1229	684
	YDL-1195C	1195	1772	1162	287	1496	1271	708
	YDL-1305C	1305	1824	1196	296	1541	1309	729
	YDL-1440C	1440	1885	1236	306	1592	1353	753
	YDL-1575C	1575	1942	1274	315	1641	1394	776

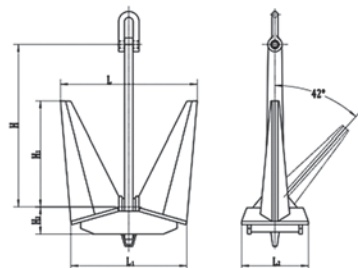

Navy Anchor 海军锚

GB/T 545-1996

Navy anchor has a simple structure, shank and fluke is a body cast.

The fluke is fixed, not turning. Navy anchors are more suitable to be used as bow anchors for merchant ships. They can be used as stern anchors and spare anchors.

Most of them are used for small boats, sailing ships and fishing boats.

More commonly used in the boat and sailing. The maximum of holding power to weight ratio can reach 12.


★ Certification: LR, CCS/NK/LR/ABS/BV/DNV etc.

海军锚结构简单，锚杆和锚爪是铸造的。锚杆是固定的，不能来回活动。常用于船上。海军锚比较适合做商船首锚使用，可做尾锚，备用锚，多数用于小船，帆船，渔船。最大抓重比可达到 12。

★可以提供提供 CCS/NK/LR/ABS/BV/DNV 等各大船级社证书



Part No 型号	Weight 名义重量 (kg)	B1(mm)	B(mm)	H(mm)	L(mm)
N-10	10	445	105	136	530
N-15	15	490	120	155	615
N-20	20	520	135	170	685
N-30	30	565	155	192	785
N-50	50	635	185	230	960
N-75	75	710	210	266	1105
N-100	100	780	230	293	1215
N-115	125	840	245	316	1310
N-150	150	900	265	336	1395
N-200	200	990	290	370	1535
N-250	250	1065	310	398	1650
N-300	300	1105	330	423	1755
N-400	400	1240	365	465	1930
N-500	500	1335	390	502	2080
N-600	600	1440	415	533	2210
N-700	700	1500	440	560	2330
N-800	800	1570	460	587	2435
N-1000	1000	1685	495	633	2620
N-1250	1250	1810	535	680	2825
N-1500	1500	1955	565	725	3000

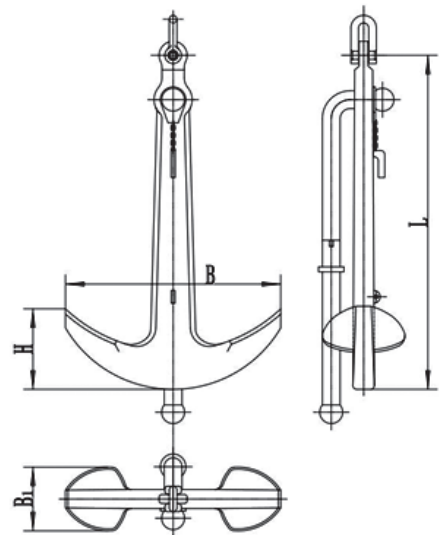

Hall Type Anchor 霍尔锚

GB/T 546-2016

Hall anchor is also called mountain anchor, is a typical type of a Stockless Bow Anchor. It can rotate freely and form a certain angle with the anchor rod. Its grip is about 2.5-4 times the anchor weight. The Hall anchor widely used in commercial shipping industry. The traditional design makes a stable working performance.


The traditional design makes a stable working performance.

★ Certification: LR, CCS/NK/LR/ABS/BV/DNV etc.


霍尔锚也称为山锚, 它是一种无杆锚, 可以自由旋转并与锚杆形成一定角度。它的抓地力约为锚固重量的 2.5-4 倍, 霍尔锚多用于商用工业运输船, 传统的设计, 工作性能稳定。

★该锚型可以提供 CCS/NK/LR/ABS/BV/DNV 等各大船级社证书


Part No 型号	Weight 名义重量 (kg)	H(mm)			B(mm)	L(mm)	I(mm)
		A 型	B 型	C 型			
H-40	40	624	624	497	198	430	303
H-60	60	713	713	568	227	492	347
H-100	100	850	850	680	270	584	410
H-125	125	911	911	726	443	629	443
H-150	150	969	969	768	308	670	470
H-180	180	1029	1029	820	327	710	500
H-240	240	1140	1140	909	361	784	552
H-300	300	1225	1225	980	388	844	595
H-360	360	1298	1298	1036	412	898	630
H-420	420	1367	1367	1091	434	946	660
H-480	480	1434	1434	1138	454	988	690
H-570	570	1517	1517	1203	481	1042	732
H-660	660	1591	1591	1262	506	1096	769
H-780	780	1684	1684	1337	535	1160	813
H-900	900	1768	1768	1403	560	1220	855
H-1020	1020	1840	1840	1463	584	1268	891
H-1140	1140	1908	1908	1519	605	1319	926
H-1290	1290	1989	1989	1589	630	1374	965

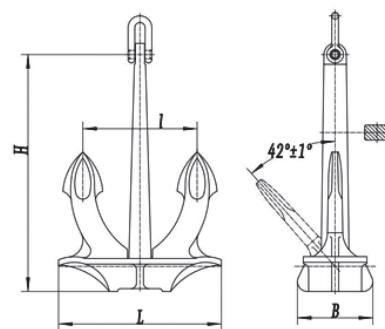

A type 矩形杆

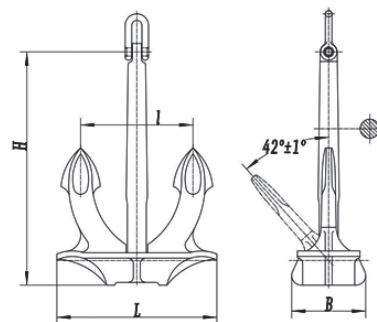

B type 圆形杆

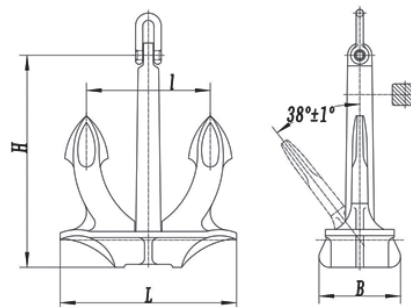

C type 矩形短杆


Bow Rollers 锚支架




Features 特点

- Friction-free surface to make dropping and weighing anchor easier
- Won't damage the deck of topsides
- Allows you to safely stow anchor while cruising and deploy at short notice
- Constructed of 316 stainless steel
- Range of rollers to fit the most common
- Combinations of anchor, mounting style and boat
- 表面光滑，易于收放锚
- 不会破坏甲板表面
- 当航行或者是临时调度时，可以安全的安置船锚
- 316 不锈钢材质
- 多种型号来配合各种不同的锚型以及安装方式




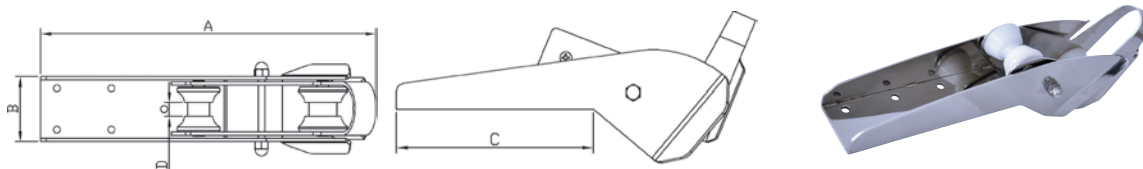



Item 型号	A(mm)	B(mm)	C(mm)	D(mm)
Y02	400	77	230	16
Y03	575	78	400	16
Y04	725	90	510	16
Y05	890	100	620	20
Y120	1210	150	860	27.5

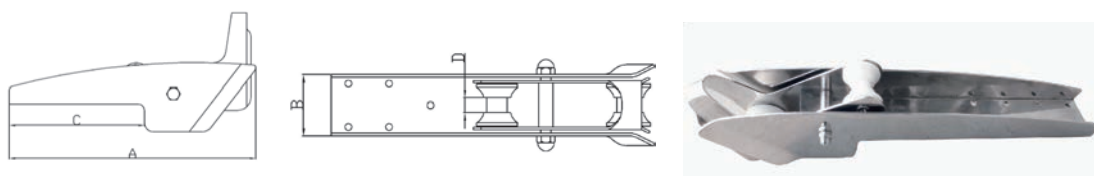



Item 型号	A(mm)	B(mm)	C(mm)	D(mm)
90102	415	78	225	16.5
90103	585	80	390	16.5
90104	740	90	505	16.5
90105	890	100	615	25

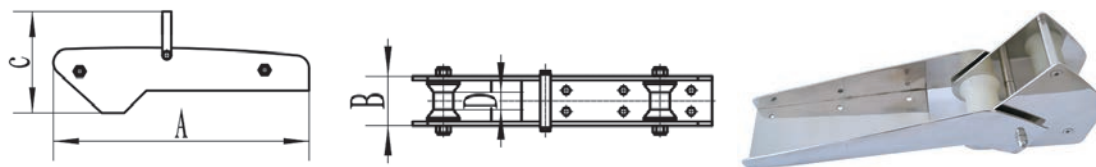



Item 型号	A(mm)	B(mm)	C(mm)	D(mm)
90109A	515	125	320	51
90109B	860	125	665	51




Item 型号	A(mm)	B(mm)	C(mm)	D(mm)
YD9000A	575	95	228	33
YD9000B	990	170	280	70




Item 型号	A(mm)	B(mm)	C(mm)	D(mm)
90109C	654	124	258	76
90109D	1065	172	325	110




Item 型号	A(mm)	B(mm)	C(mm)	D(mm)
YD11	275	40	95	180
YD14	370	50	125	245
YD25	615	80	200	400

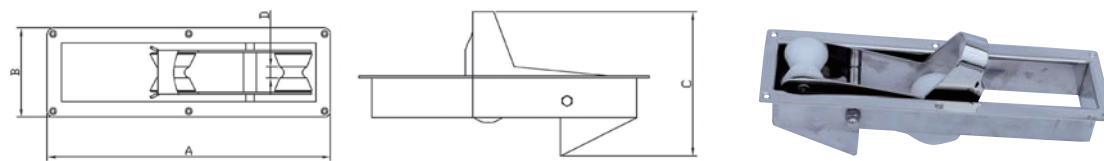


Item 型号	A(mm)	B(mm)	C(mm)	D(mm)
YD15	420	125	210	16
YD15A	500	125	220	16
YD17	565	148	250	26

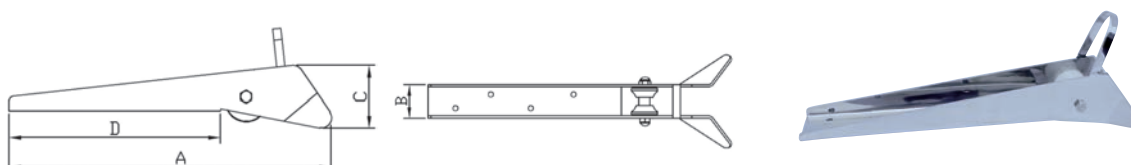



Item 型号	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
90106	505	72	75	370	16
90107	680	81	80	540	25

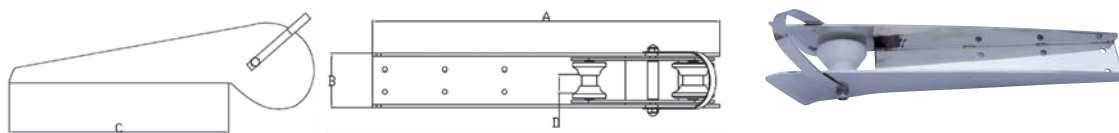



Item 型号	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YD-16	400	52	62	310	11
YD-18	495	75	80	385	16

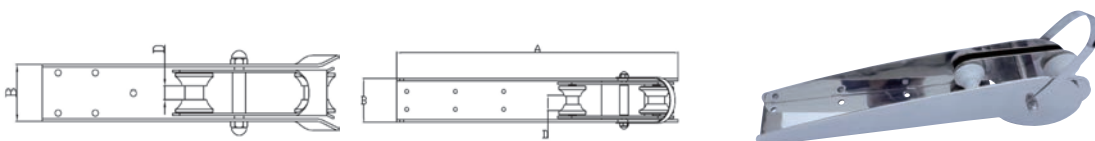


Item 型号	A(mm)	B(mm)	C(mm)	D(mm)
90108	575	90	420	16





Item 型号	A	B	C	D
Y008-365	365	72	33	225
Y008-465	465	72	40	325
Y008-565	565	72	45	425





Item 型号	A	B	C	D
Y1031	355	65	35	46




Item 型号	A	B	C	D
Y1032	390	78	24	54





Item 型号	A(mm)	B(mm)	C(mm)
YD19	329	95	72





Item 型号	A(mm)	B(mm)	C(mm)	D(mm)
YD1003	152	108	45	60
YD1004	208	120	50	70





Item 型号	A(mm)	B(mm)	C(mm)	D(mm)
YD1001	188	150	68	50
YD1002	257	209	78	70




Item 型号	A(mm)	B(mm)	C(mm)	D(mm)
YD1003A	110	78	80	69
YD1003B	150	96	100	100
YD1003C	220	112	120	163





Item 型号	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)
Y1030	241	60	98	8	77	9.5





Item 型号	A(mm)	B(mm)	C(mm)	D(mm)
Y08	47	75	155	11
Y09	75	75	155	25



Item 型号	A(mm)	B(mm)	C(mm)
Y06	165	51	80
Y06B	268	75	125



Item 型号	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
90110	170	64	66	54	6





Item 型号	A(mm)	B(mm)	C(mm)
Y07	50	75	20



Anchor Connector 锚连接器

Stainless steel AISI 316 anchor connector with swivel. With an anchor chain swivel attached to the anchor it is impossible for the chain to get twisted. The oval shaped joint allows perfect sliding of the anchor through the roller with no risk of damaging any components.


316 不锈钢材质，使用带转环的锚连接器可以防止锚链结整体成椭圆形，易于在锚支架表面滑行，同时不损坏任何其他部件





Model 型号	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YD901A	89	17.6	10	9.2	6.8
YD901B	116	20	14	11	11




Model 型号	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YD902A	90	16	10	9	7
YD902B	115	20	13	10.7	10.7



Model 型号	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YD903A	121.5	16	9	10	8
YD903B	163.5	20	13.5	12	10.8



Model 型号	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YD904A	83	16.5	8	9.3	7.3
YD904B	96.5	23	13	12	9.5
YD904C	150	28	16	15.5	11





Model 型号	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YD905A	92.5	23	9.5	8.8	7
YD905B	118	28	13	12	10.7




Chain Stopper 链卡

Windlass are not designed to hold high loads while a boat is at anchor. When the windlass is not in use and the boat is at anchor, the chain should be secured using a chain stopper or the rope rode should be attached to a load-bearing point such as a cleat.



当锚机抛锚或者收锚完毕时就会停止工作，这时候应该用链卡来固定住锚已及锚链，或者用锚绳固定在羊角或者缆桩上。



型号 NO.	A(mm)	B(mm)	C(mm)	D(mm)	Chain size 锚链尺寸
YDCS001	98	59	64	15.5	6-8mm
YDCS002	116	78	80	20	10-12mm

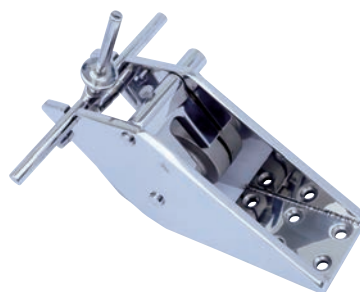


型号 NO.	B(mm)	H(mm)	H(mm)	L(mm)	Chain size 锚链尺寸
YDCS003	96	190	52	290	12.5-14mm
YDCS004	116	240	69	330	16-17.5mm
YDCS005	132	285	86	425	19-20.5mm
YDCS022	152	330	100	490	22-24mm
YDCS026	171	385	115	575	26-28mm
YDCS030	195	440	129	660	30-32mm




型号 NO.	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	Chain size 锚链尺寸
YDCS076A	145	105	20	120	69	10-13mm

CB 286-1984 闸刀掣链器

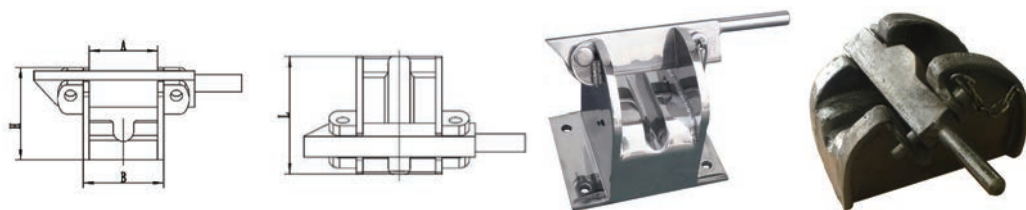


Chain size 锚链尺寸	A(mm)	B (mm)	H(mm)	L(mm)	Weight 重量
12.5-14mm	92	142	162	235	20
16-17.5mm	112	170	190	270	25
19-20.5mm	129	193	216	310	30
22-24mm	147	219	241	345	37
26-28mm	163	241	270	385	46
30-32mm	186	271	305	435	56
34-36mm	208	301	342	490	69
38-40mm	230	336	378	540	85
42-44mm	252	366	412	590	108
46-48mm	273	397	450	640	139
50-52mm	294	428	491	695	173
54-56mm	315	457	528	745	210
58-60mm	336	488	564	795	255
62-64mm	357	517	600	850	304
66-68mm	377	547	635	900	363

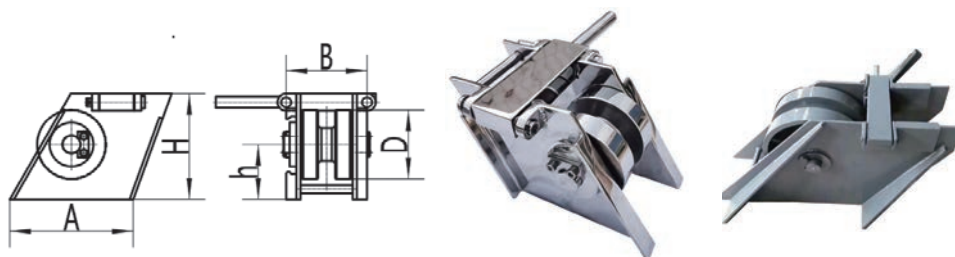


Chain size 锚链尺寸	A(mm)	B(mm)	D(mm)	H(mm)	h(mm)
12.5-14mm	180	118	100	154	80
16-17.5mm	215	144	122	182	90
19-20.5mm	250	165	140	202	100
22-24mm	295	182	162	230	112
26-28mm	340	210	190	265	125
30-32mm	385	235	218	300	140

CB/T 178-1996 螺旋掣链器

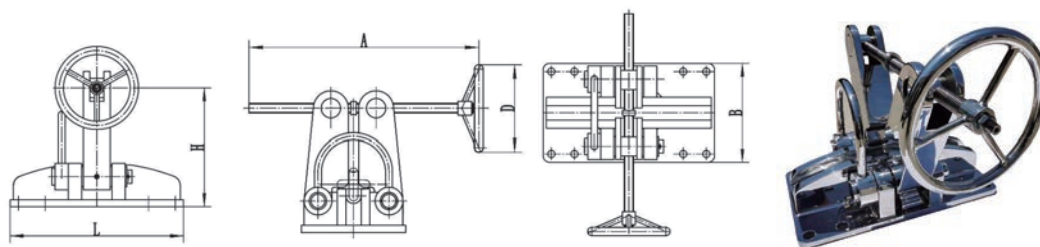




Chain size 锚链尺寸	A(mm)	B(mm)	D(mm)	H(mm)	h(mm)	Weight 重量
22-26mm	540	250	280	335	500	
28-32mm	650	320	310	400	550	
34-38mm	740	320	360	455	600	
40-44mm	845	400	420	515	670	
46-48mm	945	400	480	585	770	
52-58mm	1110	400	550	680	970	
60-66mm	1255	500	640	775	1000	

CB/T 4219 简易弃锚器

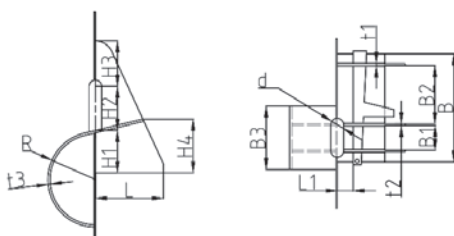


Chain size 锚链尺寸	L	L1	B	B1	B2	B3	H1	H2	H3	H4	R	T1	T2	T3	d	重量 kg
12.5-14	125	29	198	45	106	116	90	100	84	98	100	5	3	4	22	6.4
16-19	150	35	238	54	128	140	90	100	100	118	100	6	4	5	28	8.39
22-25	196	40	270	61	146	170	110	130	110	145	125	8	4	6	30	14.4
28-31	256	45	305	70	165	200	130	160	120	180	150	10	5	6	30	25.4
24-37	324	55	360	84	198	230	150	190	130	215	175	12	6	8	36	36.9

Chocks 导链器




NO.	A(mm)	B(mm)	C(mm)	D(mm)	Chain size 锚链尺寸
S00	216	78	88	83	8-12mm

Devil's Claws 掣链钩

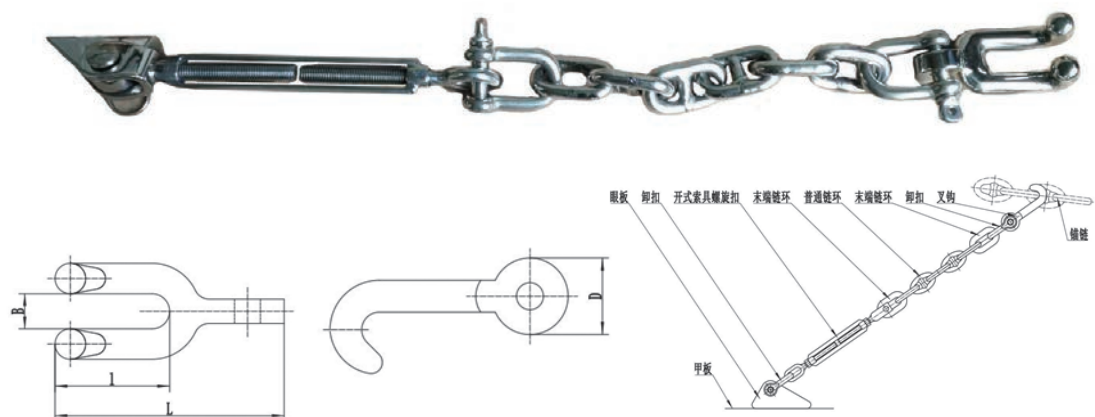



锚链直径 chain size(mm)	安全工作负荷 SWL (KN)	末端链环 普通链环 EL & C	叉钩尺寸 Claw Dimension (mm)			
		链径 d (mm)	B	D	L	I
14-16mm	5.5	12.5	18	42	124	62
17.5-20.5mm	9.3		23	48	150	75
22-24mm	12.5		29	52	186	94
26-28mm	17	14	34	57	224	120
30-32mm	22		38	62	256	135

Chain Guide 导链滚轮



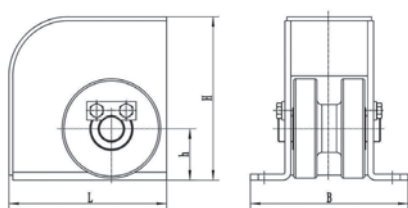


型号 NO.	B(mm)	H(mm)	h(mm)	L(mm)	Chain size 锚链尺寸
S01	160	165	52	160	12.5-14mm
S02	200	200	69	195	16-17.5mm
S03	220	235	86	225	19-20.5mm
S04	255	270	100	260	22-24mm
S05	286	310	115	300	26-28mm
S06	325	355	129	345	30-32mm

Chain Guide 导链滚轮




NO. 型号	B(mm)	H(mm)	h(mm)	L(mm)	Chain size 锚链尺寸
G001	96	115	60	200	12.5-14mm
G002	116	140	74	245	16-17.5mm
G003	132	170	91	275	19-20.5mm
G004	152	185	98	325	22-24mm
G005	171	218	115	380	26-28mm
G006	195	250	132	435	30-32mm




Stainless Steel Part No 不锈钢型号	Steel Part No 碳钢型号	B(mm)	H(mm)	h(mm)	L(mm)	Chain size 锚链尺寸	Weight 重量
GU14	GU14C	226	214	150	260	12.5-14mm	12.7
GU17.5	GU17.5C	264	250	170	306	16-17.5mm	21.0
GU20.5	GU20.5C	298	306	210	374	19-20.5mm	32.6
GU24	GU24C	346	350	240	428	22-24mm	50.0
GU28	GU28C	388	410	280	498	26-28mm	74.0
GU32	GU32C	418	458	310	556	30-32mm	104.9

Fairlead Roller 水平滚轮导缆器



NO.	A(mm)	B(mm)	C(mm)	D(mm)
R001	193	48	50.5	114

Fairlead Roller 导缆滚轮

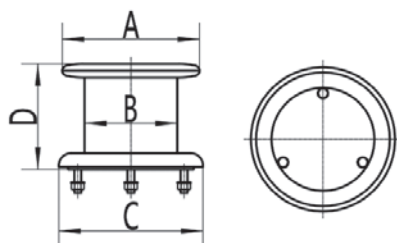


NO.	A(mm)	B(mm)	C(mm)	D(mm)
R100	150	100	160	114
R150	220	150	240	170
R200	280	200	310	209


Chain Pipe 导链筒

Stainless steel AISI316, chain & line guide, with the cooperation of the windlasses and winches.


不锈钢 316 材质，装在甲板上用来导锚链或者绳索，和锚机或者绞车配合使用。

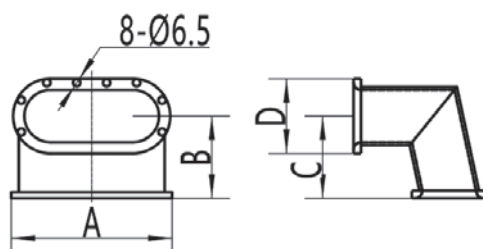


NO.	A(mm)	B(mm)	C(mm)	D(mm)	Chain Size 锚链尺寸	Rope Size 锚绳尺寸
K001	218	110	75	89	8-10mm	8-16mm

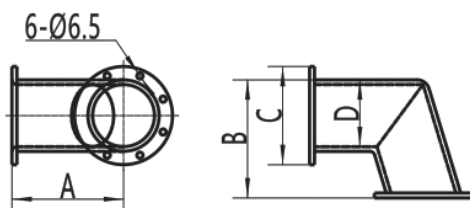

NO.	A(mm)	B(mm)	C(mm)	D(mm)	Chain Size(锚链尺寸)
K002	115	110	87	67	6-10mm

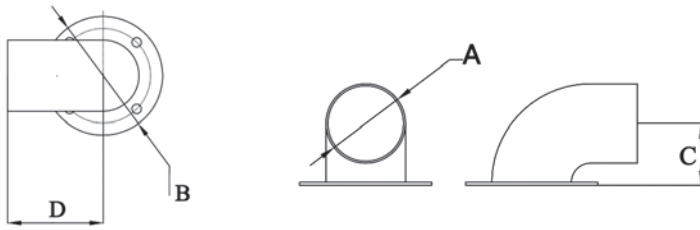


NO.	A(mm)	B(mm)	C(mm)	D(mm)	Chain Size(锚链尺寸)
K003	89	140	116	90	12.5-14mm
K004	100	160	170	140	16-17.5mm
K005	110	180	180	170	19-20.5mm

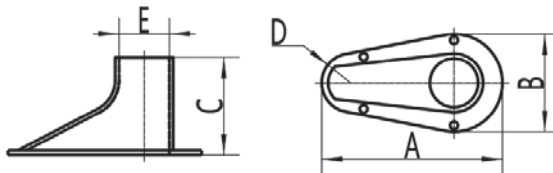


NO.	A(mm)	B(mm)	C(mm)	D(mm)	Chain Size(锚链尺寸)
K006	200	105	104	37.5	8-10mm



Fairleads 导缆孔

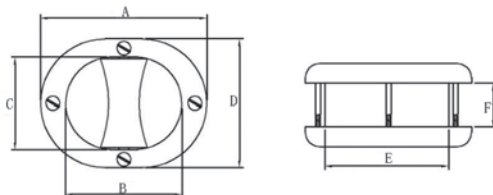



NO.	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)
FL001	230	178	122	177	182	52

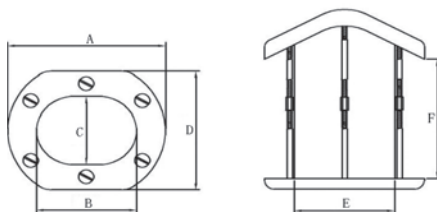



NO.	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)
FL002	217	152	103	177	157	175




NO.	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)
FL003	157	108	104	150	240	170



NO.	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)
FL004	237	177	75	136	189	7




NO.	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	G(mm)
FL005	740	430	314	44	300	210	128

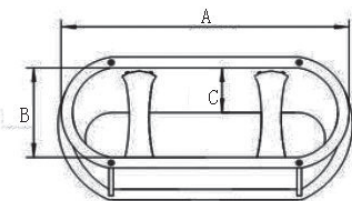


NO.	A(mm)	B(mm)	C(mm)
FL006	338.7	105	200

Mooring Pipe 导缆孔 CB/T 34-2007

Type A

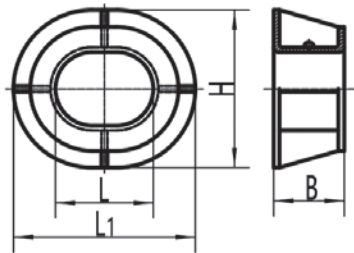

A 型 150-300




A 型 350-550




Dimension:mm

Model 型号	Size 尺寸	Steel Rope Max.Dia. 钢索最大直径	Hemp Rope Max.Dia. 麻索最大周长	Synthetic Carbon Fiber Rope Max.Dia 合成纤维索最大直径	B	H	L	L1	Weight 重量 (kg)
A150	150	16	125	30	129	260	150	300	15
A200	200	18	140	35	143	318	200	368	21
A250	250	20	160	40	155	380	250	430	27
A300	300	22	190	45	169	450	300	500	43
A350	350	24	220	50	179	460	350	560	51
A400	400	26	250	60	195	482	400	632	76
A450	450	30	270	70	209	500	450	700	102
A500	500	36	290	80	219	510	500	760	115
A550	550	44	310	90	229	560	550	830	135


Type B

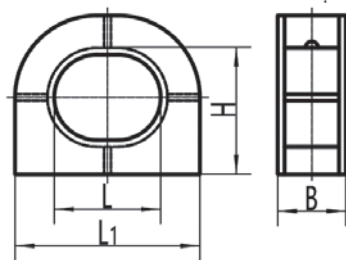

B 型 100-200

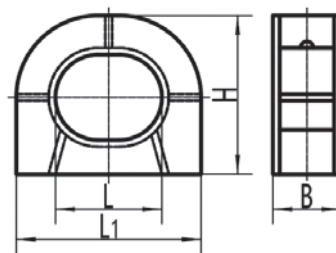


B 型 250-550



Dimension:mm

Model 型号	Size 尺寸	Steel Rope Max.Dia. 钢索最大直径	Hemp Rope Max.Dia. 麻索最大周长	Synthetic Carbon Fiber Rope Max.Dia 合成纤维索最大直径	B	H	L	L1	Weight 重量 (kg)
B100	100	14	75	18	60	141	100	170	4
B150	150	16	94	22	90	205	150	250	11
B200	200	18	126	28	120	280	200	340	24
B250	250	20	160	40	160	372	250	434	48
B300	300	22	190	45	200	464	300	528	83
B350	350	24	220	50	220	485	350	600	103
B400	400	26	250	60	240	506	400	672	136
B450	450	30	270	70	260	528	450	746	184
B500	500	36	290	80	280	550	500	820	232
B550	550	44	310	90	300	570	550	894	280


Type C



Dimension:mm

Model 型号	Size 尺寸	Steel Rope Max.Dia. 钢索最大直径	Hemp Rope Max.Dia. 麻索最大周长	Synthetic Carbon Fiber Rope Max.Dia 合成纤维索最大直径	H	L	L1	D	Weight 重量 (kg)
C120	120	—	90	40	220	120	270	30	4
C160	160	15.0	125	45	300	160	360	40	9
C200	200	18.5	160	50	350	200	450	50	18
C260	260	22.5	200	60	440	260	570	60	30
C320	320	28.0	230	70	500	320	700	70	49


CB 807-75 锚链舱眼环



Chain size 锚链尺寸	B	H	L	d	h
13-15mm	65	195	200	20	20
17-19mm	70	225	240	25	20
22-25mm	90	340	330	40	25
28-31mm	100	410	410	50	30
34-37mm	130	465	500	65	40
40-43mm	150	520	600	75	40

Marine fairleads 船用导缆钳 CB/T 4323-2013



Type B

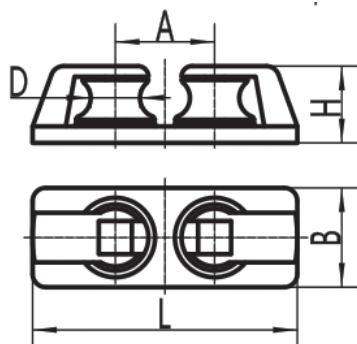

Dimension:mm

Model 型号	Nominal Dia. 公称直径	Max.Breaking Load 安全负荷 (SWL)KN	Main Size 主要尺寸					Rope Max.Dia. 缆索最大直径			Main Size 主要尺寸
			A	B	D	H	L	Steel Rope 钢索		Synthetic Carbon Fiber Rope 合成纤维绳	
								6×19	6×37		
B75	75	18.2	150	150	75	116	400	7	——	12	18
B100	100	37.21	200	200	100	147	530	10	——	16	41
B125	125	72.8	250	250	125	173	650	14	——	20	76
B150	150	120.7	300	300	150	201	780	18	——	28	132
B200	200	214.3	400	370	200	251	1100	24	——	36	264
B250	250	335.0	500	470	250	300	1240	30	——	48	498
B300	300	413.6	600	550	300	353	1480	——	34	56	798
B350	350	516.4	690	640	350	386	1690	——	38	64	1134

Type C

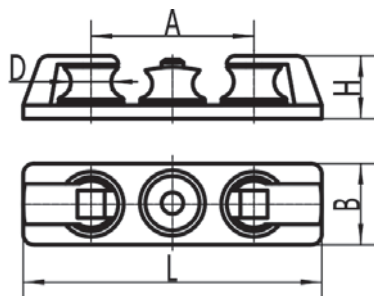


Dimension:mm

Model 型号	Nominal Dia. 公称直径	Max.Breaking Load 安全负荷 (SWL)KN	Main Size 主要尺寸					Rope Max.Dia. 缆索最大直径		Main Size 主要尺寸	
			A	B	D	H	L	Steel Rope 钢索			Synthetic Carbon Fiber Rope 合成纤维绳
								6×19	6×37		
C75	75	18.2	300	170	75	116	550	7	——	12	27
C100	100	37.21	420	200	100	147	750	10	——	16	60
C125	125	72.8	520	250	125	173	920	14	——	20	116

C150	150	120.7	640	300	150	201	1120	18	—	28	198
C200	200	214.3	820	370	200	251	1420	24	—	36	398
C250	250	335.0	1040	470	250	300	1780	30	—	48	767
C300	300	413.6	1240	550	300	353	2120	—	34	56	1240
C350	350	516.4	1440	640	350	386	2440	—	38	64	1795


Type D



Dimension:mm

Model 型号	Nominal Dia. 公称直径	Max.Breaking Load 安全负荷 (SWL)KN	Main Size 主要尺寸					Rope Max.Dia. 缆索最大直径			Weight 重量 (kg)
			A	B	H	L	R	Steel Rope 钢索		Synthetic Carbon Fiber Rope 合成纤维绳	
								6×19	6×37		
D150	150×80	18.2	74	75	54	150	40	7	——	12	20
D190	190×90	37.21	92	90	66	190	47	10	——	16	30
D250	250×110	72.8	120	105	84	250	54	14	——	20	54
D300	300×120	120.7	145	120	99	300	62	18	——	28	90
D380	380×140	214.3	190	140	128	380	75	24	——	36	170
D470	470×160	335.0	240	160	154	470	90	30	——	48	270
D720	720×200	413.6	360	220	244	720	125	——	34	56	740

Type E



Dimension:mm


Model 型号	Nominal Dia. 公称尺寸	Synthetic Carbon Fiber Rope Dia. 合成纤维索直径	Main Size 主要尺寸					Weight 重量 (kg)
			A	B	C	H	L	
E120	120×30	8	50	32	100	27	120	0.11
E140	140×40	12	52	36	120	35	144	0.20
E190	190×40	16	68	43	160	50	190	0.47
E220	220×50	20	78	50	184	56	216	0.79
E230	230×70	24	93	65	200	73	232	1.36

Anchor Chain 锚链

Features 特点

Our chains are top quality DIN 766 /BM Open Link Chain/AM Stud Link Chain for use on our anchor windlasses. For the windlass to run smoothly, the chain needs to match the gypsy. The gypsies of our windlass are designed according to the DIN 766/BM Open Link Chain/ AM Stud Link Chain. Available in hot dipped galvanized steel and stainless steel. The chain stows itself in the windlass gypsy and the weight causes it to drop through the chain pipe.


我们提供高质量德标 766/ 国标无档锚链 / 国标有档锚链，可以匹配我们的锚机。锚机运转平稳需要匹配合适的锚链轮，我们每一台锚机的锚链轮都是按照标准德标 766/ 国标无档锚链 / 国标有档锚链而设计。锚链可以在锚链轮里按照轨道运转并由导链筒落下。



DIN766 Standard 德标 766 标准


Galvanized Part No. 热镀锌型号	Stainless steel Part No. 不锈钢型号	Side d 直径		Inside length 内长			Inside Width b1 内宽	Outside Width b2 外宽	Length per 11 links 每 11 节长度			weight per meter 每米重量	Proof load 工作负荷	Breaking load 破断负荷
		mm	± mm	mm	+mm	-mm			mm	+mm	-mm			
0815-0705	0815-0605	5	0.2	18.5	0.4	0.2	6	17	203.5	2.4	1.2	0.5	6.25	12.50
0815-0706	0815-0606	6	0.2	18.5	0.4	0.2	7.2	20.2	203.5	2.4	1.2	0.8	7.84	16.00
0815-0707	0815-0607	7	0.3	22	0.4	0.2	8.4	23.8	242	3	1.4	1.1	12.30	25.00
0815-0708	0815-0608	8	0.3	24	0.4	0.2	9.6	27.2	264	3.2	1.5	1.4	15.70	32.00
0815-0709	0815-0609	9	0.4	27	0.5	0.3	10.8	30.6	297	3.6	1.8	1.8	19.60	40.00
0815-0710	0815-0610	10	0.4	28	0.5	0.3	12	34	308	3.7	1.9	2.2	24.50	50.00
0815-0711	0815-0611	11	0.4	31	0.5	0.3	13.2	37.4	341	4	2	2.7	31.40	63.00
0815-0712	0815-0612	12	0.3	36	0.6	0.3	14.4	40.8	396	4.4	2.2	3.1	35.70	71.50
0815-0713	0815-0613	13	0.5	36	0.6	0.3	15.6	44.2	396	4.6	2.4	3.8	39.20	80.00

AM Stud Link Chain 国标有档锚链

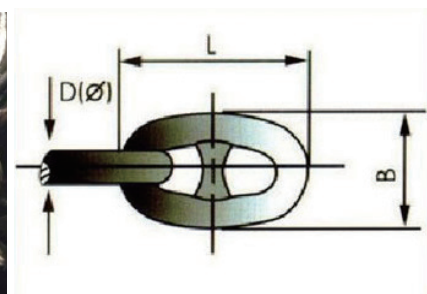

Chain Diameter 锚链直径	Chain Link Size 链节尺寸		AM1U1 有档锚链 Stud Link Chain		AM2U2 有档锚链 Stud Link Chain		每米重量 Weight per meter
	Outside Length 外长 (L)	Outside Width 外宽 (B)	工作负荷 Proof Load	破断负荷 Breaking Load	工作负荷 Proof Load	破断负荷 Breaking Load	
MM	MM	MM	KN	KN	KN	KN	Kg
12.5	75	45	46	66	66	92	3.56
14	84	50.4	58	82	82	116	4.33
16	96	57.6	76	107	107	150	5.67
17.5	105	63	89	127	127	179	6.76
19	114	68.4	105	150	150	211	8.36
20.5	123	73.8	123	175	175	244	9.45
22	132	79.2	140	200	200	280	10.91
24	144	86.4	167	237	237	332	13.45
26	156	93.6	194	278	278	389	15.67
28	168	100.8	225	321	321	449	18.04
30	180	108	257	368	368	514	20.51

BM Stud Link Chain 国标无档锚链

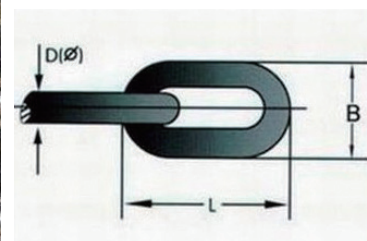


Chain Diameter 锚链直径	Chain Link Size 链节尺寸		AM1U1 有挡锚链 Stud Link Chain		AM2U2 有挡锚链 Stud Link Chain		每米重量 Weight per meter
	Outside Length 外长 (L)	Outside Width 外宽 (B)	工作负荷 Proof Load	破断负荷 Breaking Load	工作负荷 Proof Load	破断负荷 Breaking Load	
MM	MM	MM	KN	KN	KN	KN	Kg
12.5	75	45	28.75	57.81	41.20	82.60	3.40
14	84	50.4	34.78	69.93	51.00	101.90	4.26
16	96	57.6	47.10	94.72	66.20	132.30	5.56
17.5	105	63	56.35	113.31	78.89	157.78	6.65
19	114	68.4	66.42	133.57	93.60	187.20	9.07
20.5	123	73.8	77.33	155.49	108.64	217.27	10.01
22	132	79.2	89.05	179.06	125.40	250.90	11.95
24	144	86.4	105.98	213.25	149.90	298.90	14.00
26	156	93.6	124.38	250.12	175.40	350.80	16.33
28	168	100.8	144.26	290.08	203.60	406.70	18.79
30	180	108	165.60	333.00	234.20	467.50	21.11

Standard Swivel Forerunner, Swivel Assembly Built, Common Link, Enlarged Link, Bow&Eye

Swivel, Enlarged Link, Open End Link.


转环组 E+EL+SW+EL+C

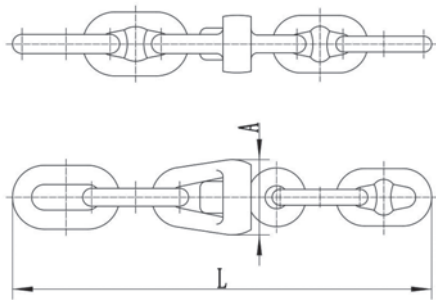

Chain Diameter 锚链直径	Standard 标准						Size 尺寸	
	AM1		AM2		AM3		A	L
	工作负荷 Proof Load	破断负荷 Breaking Load	工作负荷 Proof Load	破断负荷 Breaking Load	工作负荷 Proof Load	破断负荷 Breaking Load		
11	52	36	72	52	102	72	52	291
12.5	66	46	92	66	132	92	59	328.5
14	82	58	116	82	165	116	66	370


16	107	76	150	107	216	150	75	421
17.5	127	89	179	127	256	179	82	461.5
19	150	105	211	150	301	211	89	499
20.5	175	123	244	175	349	244	96	537.5
22	200	140	280	200	401	280	103	581
24	237	167	332	237	476	332	113	633
26	278	194	389	278	556	389	122	685
28	321	225	449	321	642	449	132	737
30	368	257	514	368	735	514	141	791
32	417	291	583	417	833	583	150	844

Kenter Joining 肯特卸扣



Nominal Dia. 公称直径 d mm	l	w	k
11	66	46	17
12.5	75	53	19
14	84	59	21
16	96	67	24
17.5	105	74	27
19	114	80	29
20.5	123	86	31
22	132	92	33
24	144	101	36
26	156	109	40
28	168	118	43
30	180	126	46
32	192	134	49
34	204	143	52
36	216	151	55
38	228	160	58
40	240	168	61

D End Anchor Shackle D 型末端卸扣



Nominal Dia. 公称直径 d mm	d1	l	w	e	f	m
11	15	96	57	20	34	15
12.5	18	109	65	23	39	18
14	20	122	73	25	43	20
16	22	139	83	29	50	22
17.5	25	152	91	32	54	25
19	27	165	99	34	59	27
20.5	29	178	107	37	64	29
22	31	191	114	40	68	31
24	34	209	125	43	74	34
26	36	226	135	46	81	37
28	39	244	146	50	87	39
30	42	261	156	54	93	42
32	45	278	166	58	99	45
34	48	296	177	61	105	48
36	50	313	187	65	112	50
38	53	331	198	69	118	53
40	56	348	208	72	124	56

Marine Rope 锚绳

Nylon twisted dock line can absorb sudden shock loads that would break rope of other fibers. This ability allows this product to be widely used in the marine industry for dock lines. Made from tenacity, multifilament nylon fiber which is light and heat stabilized, nylon rope is resistant to rot, oils, gasoline, grease, marine growth and most chemicals.

尼龙锚绳比起其他材质的锚绳可以承受更大的冲击荷载。这个特点使得此类锚绳比较广泛的用来系缆。高韧度，多股尼龙锚绳质地轻盈，热稳定性好，抗腐能力强，抗各种油污，海生物以及各种化学品。

Nylon Double Braid Anchor Rope with SS316 Thimble 尼龙双编锚绳，带 316 不锈钢套环

Item 型号	Size 尺寸	Length 长度	Color 颜色	Packing 包装	PCS/CTN 件 / 箱	
ND2101	3/8"	50'	White	Coil/ Reel	12	
ND2102		100'			12	
ND2103		150'			6	
ND2104	1/2"	100'			6	
ND2105		150'			6	
ND2106		200'			2	
ND2107		250'			2	
ND2108	5/8"	200'			1	

Nylon Double Braid Anchor Rope**尼龙双编锚绳，尼龙双编锚绳，带 316 不锈钢套环**

Item 型号	Size 尺寸	Length 长度	Color 颜色	Packing 包装	PCS/CTN 件 / 箱	
ND2501	1/8 "	500'	White	Coil/Reel	12	
ND2502	5/32 "	500'			8	
ND2503	3/16 "	500'			4	
ND2504	1/4"	500'			4	
ND2505	5/16"	500'			4	
ND2506	3/8"	500'			1	
ND2507	1/2"	500'			1	

PP 3-Strand Sliver Anchor Rope 丙纶三股锚绳

Item 型号	Size 尺寸	Length 长度	Color 颜色	Packing 包装	PCS/CTN 件 / 箱	
PP0101	1/4 "	500'	White	Coil/Reel	4	
PP0102	5/16 "	500'			4	
PP0103	3/8 "	500'			1	
PP0104	1/2"	500'			1	

Nylon 3-Strand Anchor Rope with SS316 Thimble 尼龙三股锚绳，带 316 不锈钢套环

Item 型号	Size 尺寸	Length 长度	Color 颜色	Packing 包装	PCS/CTN 件 / 箱	
NR5101	3/8 "	50'	White	Coil/Reel	12	
NR5102		100'			12	
NR5103		150'			6	
NR5104	1/2"	100'			6	
NR5105		150'			6	
NR5106		200'			2	
NR5107		250'			2	
NR5108	5/8"	200'			1	

Dock Line /(Nylon Double Braid Dock line Pre-Spliced 12 “)**码头绳（尼龙双编绳，叠编长度 12 “）**

Item 型号	Size 尺寸	Length 长度	Color 颜色	Packing 包装	PCS/CTN 件 / 箱	
NT3111	3/8 "	15'	White/black/ Blue	Clam Shell	12	
NT3112		20'			12	
NT3113		25'			12	
NT3114	1/2"	15'			12	
NT3115		20'			12	
NT3116		25'			12	

Dock Line /(Nylon Twisted Dock line Pre-Spliced 12 “)**码头绳（尼龙扭编码头绳，叠编长度 12 “）**

Item 型号	Size 尺寸	Length 长度	Color 颜色	Packing 包装	PCS/CTN 件 / 箱	
NT3117	3/8 "	15'	White/black/ Blue	Clam Shell	12	
NT3118		20'			12	
NT3119		25'			12	
NT3120	1/2"	15'			12	
NT3121		20'			12	
NT3122		25'			12	
NT3123	5/8"	25'			12	
NT3124		35'			12	

Dock Line (Nylon Twisted Dock line Pre-Spliced 12”)**码头绳（尼龙扭编，叠编长度 30cm）**

Item 型号	Size 尺寸	Length 长度	Color 颜色	Packing 包装	PCS/CTN 件 / 箱		
DB1100	10mm	4m	White/black/ navy blue	Bundle	48		
DB1101	12mm				32		
DB1102	14mm				24		
DB1103	16mm				20		
DB1104	18mm				12		
DB1105	10mm	6m			36		
DB1106	12mm				24		
DB1107	14mm				16		
DB1108	16mm				12		
DB1109	18mm				8		

Dock Line (Polyester Twist Rope with 30CM Splice)**码头绳（涤纶绳，叠编长度 30cm）**

Item 型号	Size 尺寸	Length 长度	Color 颜色	Packing 包装	PCS/CTN 件 / 箱	
DT1201	10mm	4m	White/black/navy blue	Bundle	50	
DT1202	12mm				50	
DT1203	14mm				40	
DT1204	16mm				30	
DT1205	10mm	6m			50	
DT1206	12mm				30	
DT1207	14mm				24	
DT1208	16mm				20	
DT1209	10mm	15m		Coil	20	
DT1210	12mm				10	
DT1211	14mm				8	


Anchor Rope 3-Strand rope with DIN766 Chain Galvanized / SS316

三股锚绳，带热镀锌 / 316 不锈钢锚链

ITEM 型号	ROPE 锚绳		CHAIN 锚链		TOTAL 总长度
	SIZE 尺寸	LENGTH 长度	SIZE 尺寸	LENGTH 度	
AR3121	12mm	45m	6mm	5m	50m
AR3122	12mm	60m	6mm	5m	65m
AR3123	12mm	75m	6mm	7m	82m
AR3124	12mm	90m	6mm	7m	97m
AR3125	14mm	45m	8mm	5m	50m
AR3126	14mm	60m	8mm	5m	65m
AR3127	14mm	75m	8mm	7m	82m
AR3128	14mm	90m	8mm	5m	95m
AR3129	16mm	60m	8mm	5m	65m

**Wire Rope 钢丝绳**

Stainless steel chemical contents



Material	C %	Ni %	Cr %	P %	S %	Si%	Mn %	Mo %
304SS	≤0.08	8.0-10.5	17-19	≤0.035	≤0.03	≤1.0	≤2.0	-
316SS	≤0.08	10.0-14.0	16-18.5	≤0.035	≤0.03	≤1.0	≤2.0	2.0-3.0

Strength grades 强度等级


1270 N/mm², 1570 N/mm², 1770 N/mm², 1870 N/mm².etc

Specification



Wire Rope 钢丝绳

Wire Rope diameter flexible 易弯曲钢丝绳







Wire Rope Coated With PVC white 钢丝绳带白色 PVC 外皮

Nylon Wheel 尼龙轮

Nylon wheel have good corrosion resistance, good corrosion resistance and heat faster, low noise, less density, long life, so widely used in mechanical manufacturing, hardware tools, etc.


尼龙轮具有耐腐蚀性好，耐磨，散热快，低噪音，密度低，使用寿命长等优点。因此广泛应用于机械制造和五金工具等方面。

	ITEM(型号)	A	B	C	D
	W001	72	89.5	19	16.5
	W002	72	69	19.5	16.2
	W003	62	70	15	16
	W004	62	56	16	16.5
	W005	57	65	16	15
	W006	58	53	16	15
	ITEM(型号)	A	B	C	D
	W01H	59	69.5	16	18
	W02H	60	55.5	16	18
	W03H	56	60	16.5	15
	W04H	55	52.5	16.5	15
	ITEM(型号)	A	B	C	D
	W581	91.5	70	60	14.5
	ITEM(型号)	A	B	C	D
	W670	194	70	155	20
	W680	135	60	101	20
	ITEM(型号)	A	B	C	D
	W6801	134	35	8	
	W6802	94	24.5	8	
	W6803	84	35	8	
	W6804	6435	25	8	

Mooring Bollard 国标带缆桩

GB/T554-2008



Type A A 型普通带缆桩

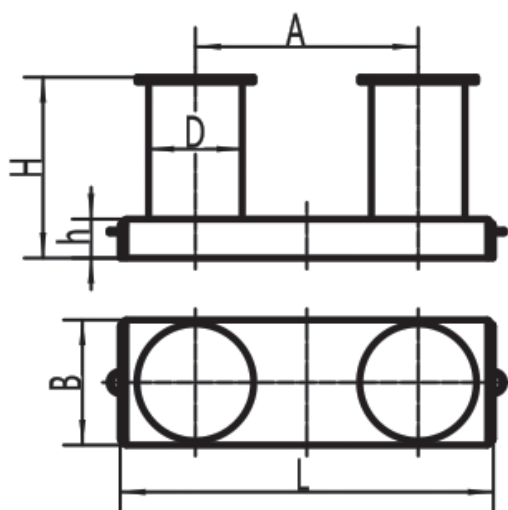

Dimension:mm



Model 型号	Nominal Dia. 公称直径 d mm	SWL(KN) 安全工作负荷	Pillar 桩柱			Base 底座			Weight 重量
			A	D	H	B	L	h≥	
A100	100	29	250	114	200	165	445	50	19
A125	125	39	315	140	250	195	540	60	29
A160	160	49	400	168	320	225	670	70	45
A200	200	78	500	219	385	290	860	85	80
A250	250	118	630	273	480	360	1065	100	141
A315	315	196	800	325	605	430	1300	125	264
A355	355	255	890	351	675	480	1475	145	358
A400	400	314	1000	402	760	550	1630	160	499
A450	450	382	1130	450	850	620	1840	170	680
A500	500	451	1250	508	940	690	2040	190	911
A560	560	549	1380	560	1040	750	2240	210	1208
A630	630	686	1570	610	1165	820	2510	225	1601
A710	710	804	1750	712	1310	960	2840	260	2252
A800	800	981	2000	813	1495	1100	3240	295	3071

Type B B 型嵌入式带缆桩

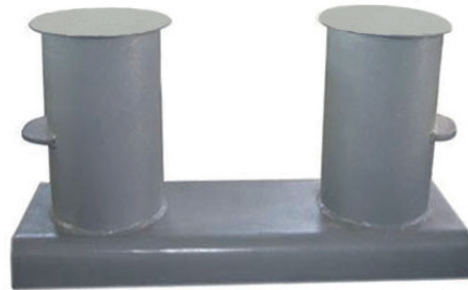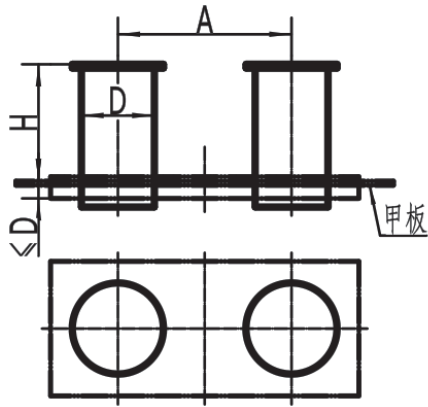


Model 型号	Nominal Dia. 公称直径	Max Breaking Load 安全工作负荷 (SWL)/kN	A	D	H	
					Deck without Plywood 不铺木甲板的甲板	Deck with Plywood 铺木甲板的甲板
B160	160	49	400	168	250	310
B200	200	78	500	219	300	360
B250	250	118	630	273	380	440
B315	315	196	800	325	480	540
B355	355	255	890	351	530	590
B400	400	314	1000	402	600	660
B450	450	382	1130	450	680	740
B500	500	451	1250	500	750	810

Type C C 型简易带缆桩

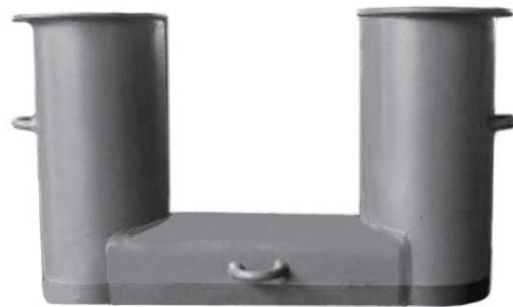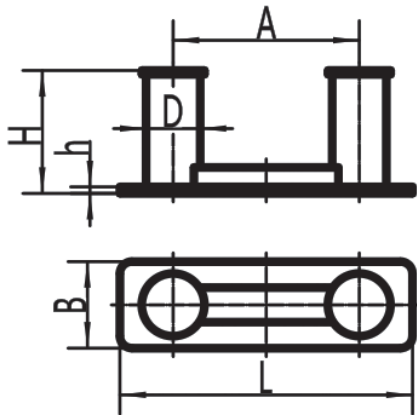

CB/T 3845-2013 船用十字型缆桩

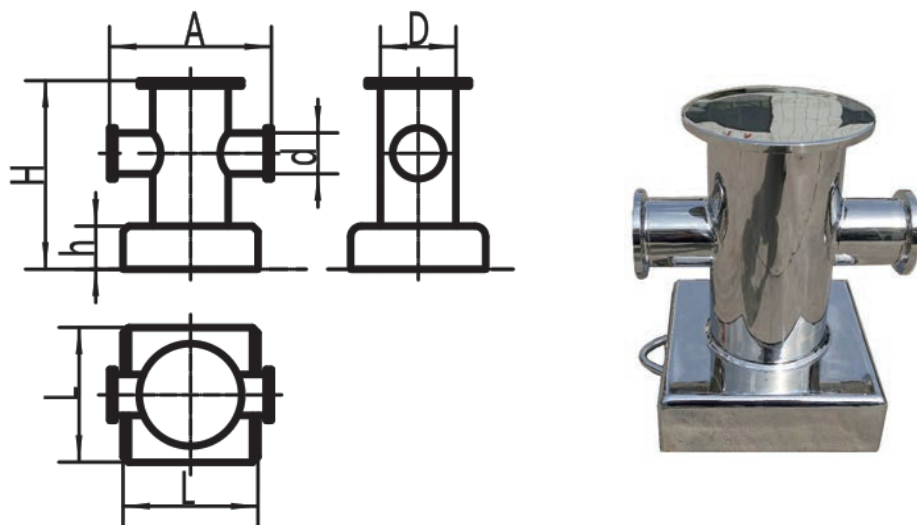

Model 型号	Nominal Dia. 公称直径	安全工作负荷 (SWL)/kN	A	D	d	H	h	L	Weight 重量 kg
D100	100	50	240	114	60	285	75	200	19
D125	125	80	300	140	76	350	80	250	31
D150	150	100	360	168	89	430	90	315	47
D200	200	150	460	219	114	520	100	400	78
D250	250	250	580	273	140	645	125	500	134
D300	300	400	725	325	168	810	150	630	267
D350	350	500	850	355	—	970	170	700	360
D400	400	650	950	406	219	995	175	800	503

★ GB/T554-2008 mooring bollard have five different types: type A ordinary bollard, type B inserted bollard, type C simple bollard, type DL/DH double cross bollard. CB/T 3845-2013 mooring single cross bollard. The material is carbon steel or stainless steel. We can produce according to customer's requirement.


GB/T554-2008 国标带缆桩有五种不同的类型：A 型普通带缆桩，B 型嵌入带缆桩，C 型简易带缆桩，DL 型双十字螺栓式带缆桩 /DH 型双十字焊接式带缆桩。CB/T 3845-2013 船用十字形缆桩。

材质分为碳钢或者不锈钢，可以根据客户要求生产。

Dimension:mm

Model 型号	Nominal Dia. 公称直径	安全工作负荷 (SWL)/kN	A	B	D	H	h	L	Weight 重量 kg
C50	50	13	180	100	50	115	9	310	4.5
C75	75	18	275	125	75	170	12	430	10.8
C100	100	25	350	160	100	220	14	540	18.6
C125	125	34	430	200	125	275	15	676	34.3
C150	150	43	500	230	150	330	16	800	49


Type DL/DH DL 型双十字螺栓式带缆桩 /DH 型双十字焊接式带缆桩

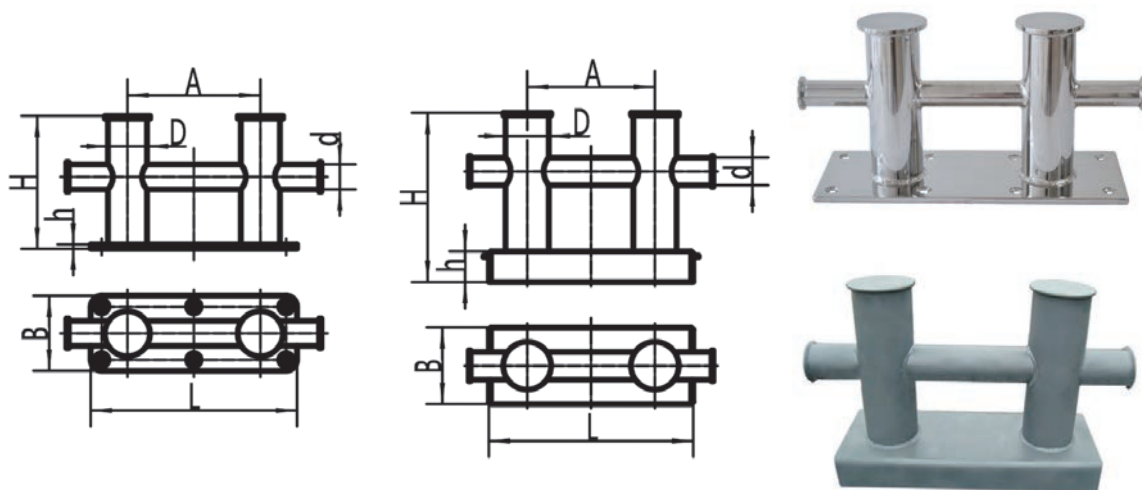

Model 型号	Nominal Dia. 公称直径	安全工作负荷 (SWL)/kN	A	B	D	d	H	h	L	Screws 螺钉		Weight 重量 kg
										Screw Thread Dia. 螺纹直径	Quantity 数量 (个)	
DL/DH50	50	13								M12	6	7
DL/DH75	75	18	275	170	75	48	290	10	450	M16		16
DL/DH100	100	25	350	200	100	65	350	12	550	M18		27
DL/DH125	125	34	425	240	125	80	425	14	660	M22		49
DL/DH150	150	43	500	270	150	90	500	16	770			71
DL/DH175	175	62	530	320	180	110	550	18	850	M24		103
DL/DH200	200	72	600	360	203	130	795	145	960	—	—	181
DL/DH250	250	105	750	450	245	159	855	155	1200			310
DL/DH300	300	185	900	540	299	194	1160	180	1440			576


Bollard 系缆桩

Singe Cross bollard 单十字




ITEM	A(mm)	B (mm)	C(mm)	E (mm)
YD03B	30	60	80	80

Single Cross Bollard 单十字缆桩




ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YD0601B	122	97	122	151
YD0602B	150	120	152	200

Single Cross Bollard 单十字缆桩




ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YCS020	120	120	50	12	21
YCS021	135	135	51	12	21

Cross Bollard 单十字缆桩




ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YCS030	86	97	61	14.5	5.9

Single Cross bollard 单十字




ITEM	A(mm)	B(mm)	C(mm)	D(mm)	F(mm)
YCS010	38*1.5	98	90	10	48
YCS011	50*2	120	100	12	55
YCS012	60*2	160	115	12	62
YCS013	76*2.5	210	150	14	85
YCS014	89*2.5	250	160	14	87
YCS015	102*2.5	280	180	16	98

Single Cross bollard 单十字




ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YCB03	300	200	160	160

Hot Dipped Galvanized Single-Cross Bollard
碳钢单十字




ITEM	A (mm)	C(mm)
YD03C	110	60
YD04C	140	80

Double Cross Bollard 双十字

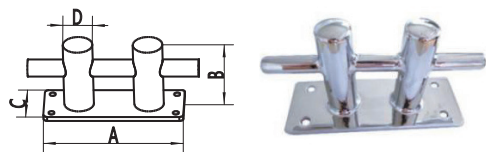


ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YCB01	180	95	65	51

Double Cross Bollard 双十字

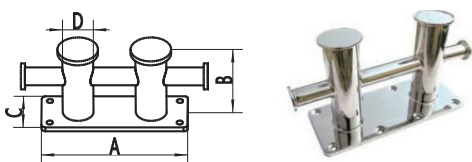


ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YCB02	400	180	120	51

Double Cross bollard 双十字

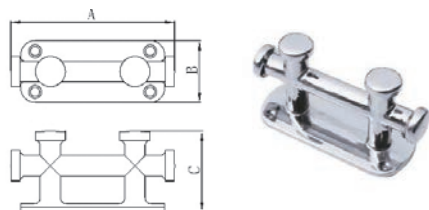

ITEM	A(mm)	B(mm)	C(mm)
YD0401B	120	60	60
YD0402B	300	115	165
YD0403B	380	100	200
YD0404B	410	140	230
YD0405B	500	170	240

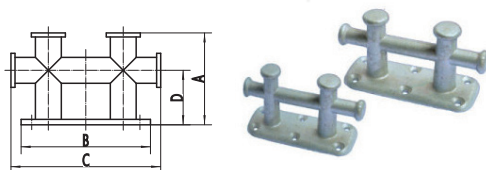Hot Dipped Galvanized Double-Cross Bollard
碳钢双十字


ITEM	A(mm)	B(mm)
YD01C	70	180
YD02C	90	235

Horn Bollard 板凳




ITEM	L(mm)	W(mm)	H(mm)
YD0501B	165	60	66
YD0502B	200	70	75
YD0503B	250	80	60
YD0504B	300	90	105

Horn Bollard 板凳

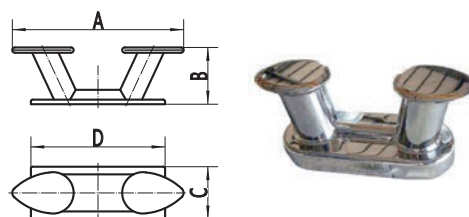

ITEM	A(mm)	B(mm)	C(mm)	D(mm)
HB01	706.3	219	260	640


Horn Bollard 板凳

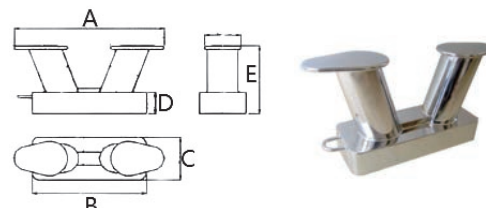

ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
HB02	980	744	300	150	477
HB03	980	744	300	150	577


★ All bollards can produced accroding to customer's design . 所有系统缆桩都可以根据客户的设计制作。

Aluminum cleat 铝索栓

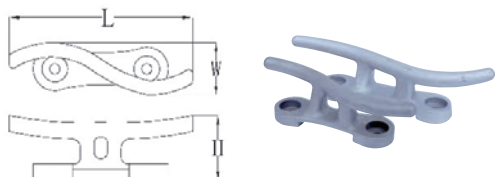


ITEM	L(mm)	W(mm)	H(mm)
YDC0101	380	70	110
YDC0102	300	60	80
YDC0103	250	60	80

Cleat S 型索栓




ITEM	A(mm)	B(mm)	C(mm)
YD01S	260	67	114
YD02S	313	85	132

Round Tube Cleat 圆管式索栓

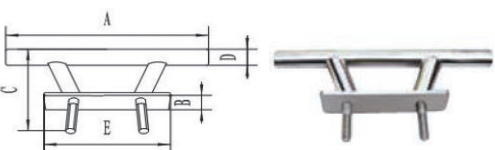


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YDR01	292.1	38.1	88.9	25	120

Oval Tube Cleat 椭圆管式索栓

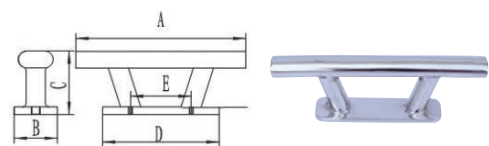


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YDR02	150	19	55	120	69.5
YDR03	203.2	34	58.3	140	67.5
YDR04	250	40	70	150	84
YDR05	304.8	50	80	178	83

Surfboard Cleat 扁孔索栓

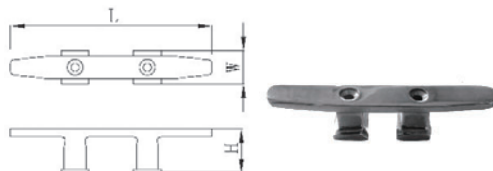


ITEM	L(mm)	W(mm)	H(mm)
YDC03	210	35	45

Cleat with threaded stud 螺纹索栓

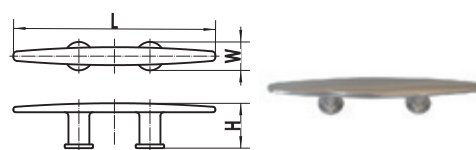


ITEM	L(mm)	W(mm)	H(mm)
YDC04	200	60	40

Mast cleat 带底板索栓

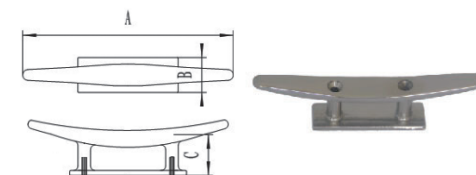


ITEM	A (mm)	B(mm)	C(mm)
YDC0501	100	14	14
YDC0502	125	15	16
YDC0503	150	20	19
YDC0504	200	23	22
YDC0505	250	25	25

Low silhouette cleat 扁索栓



ITEM	L(mm)	H(mm)
YDC0601	180	32
YDC0602	240	43
YDC0603	300	70
YDC0604	350	73

Hollow base cleat 圓索栓




ITEM	L(mm)	W(mm)	H(mm)
YDC0701	300	70	55
YDC0702	240	65	40
YDC0703	190	50	35
YDC0704	150	40	30
YDC0705	125	40	25

Flush Cleat 抽拉索栓




ITEM	A (mm)	B (mm)	C (mm)	D (mm)
YDC0801	130	31.7	65	M6*41
YDC0802	160	35	70	M10*48
YDC0803	210	45	96	M10*66
YDC0804	260	57	121	M12*80
YDC0805	310	69	125	M12*80

Low Silhouette Cleat 扁索栓

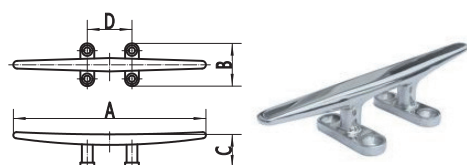


ITEM	A (mm)	B (mm)	C (mm)	D (mm)
YDC0901	125	46	25	41
YDC0902	150	56	29	42.3
YDC0903	195	62	31	49.1
YDC0904	254	64	40	57.5

Mast Cleat 索栓




ITEM	L (inch)
YDC1200	4-1/2"

Cleat 索栓

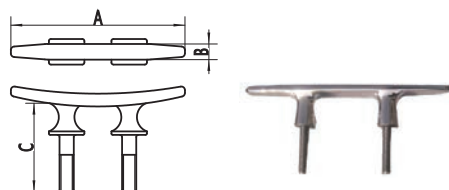


ITEM	A (mm)	B (mm)	C (mm)
YDC11	150	45	56
YDC12	203	60	84

Cleat with Threaded Stud 帶螺紋索栓

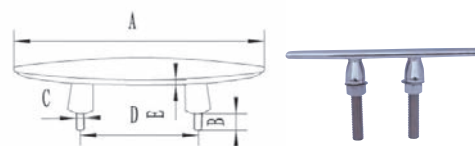


ITEM	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
YDC13	203.2	30	M12	84	12
YDC14	254	30	M12	98	15
YDC15	304.8	30	M12	116	18
YDC16	381	30	M12	140	20

Cleat with Threaded Stud 帶螺紋索栓




ITEM	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
YDC17	203.2	60	M12	84	8
YDC18	254	60	M12	98	10
YDC19	304.8	60	M12	116	13
YDC20	381	60	M12	140	15

Iron Cleat 铸铁索栓




ITEM	L (mm)	W (mm)	H (mm)
YDC0201	300	40	60
YDC0202	250	36	55
YDC0203	200	30	50
YDC0204	150	20	35

Cleat 提拉索栓

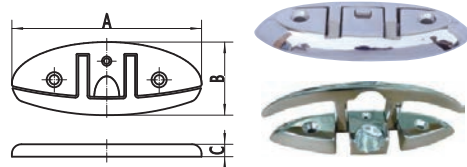


ITEM	A(mm)	B(mm)	C(mm)
YTC-01	118	41	14
YTC-02	156	54	14

Cleat 吊艇羊角

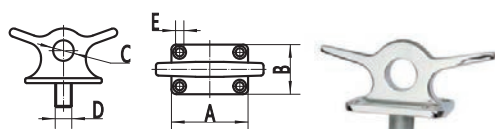


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E (mm)
YD110S	99	79	30.4	16*20	11

Ring Cleat 提环

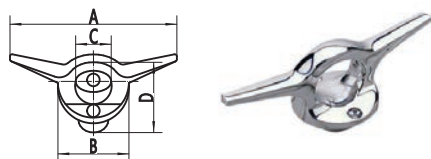


ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YD1101S	152.4	63.5	38.1	64

Cleat 吊艇羊角

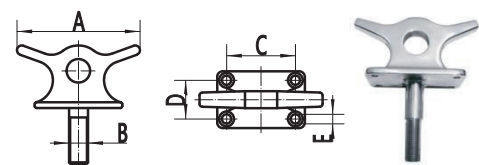


ITEM	A(mm)	B(mm)	C(mm)	D (mm)	E(mm)
YD100S	200	24	120	60	10.5

Bow Chock 平导缆器




ITEM	A (mm)	B(mm)	C(mm)
YD0101K	121	19	23.5
YD0102K	152	23.8	26

Skeme Bow Chock 斜尖导缆器

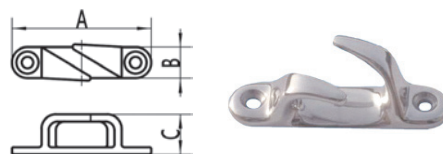


ITEM	A (mm)	B(mm)	C(mm)
YD0201K	152.4	34	124.6
YD0202K	203.2	38	164.4
YD0203K	254	47.6	207

Skene Bow Chock 斜尖导缆器

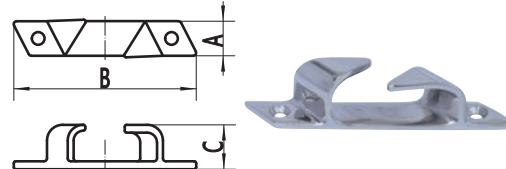

ITEM	A(mm)	B(mm)	C(mm)
YD0301K	20	115	30
YD0302K	30	150	35

Straight chock 直导缆器

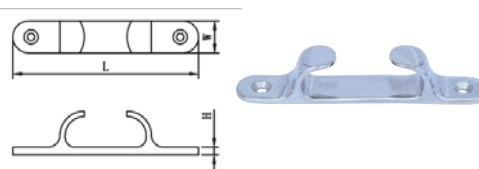


ITEM	L(mm)	W(mm)	H(mm)
YD0401K	120	25	6
YD0402K	150	30	6
YD0403K	200	40	9
YD0404K	250	45	9

Heavy duty Straight chock 重型导缆器




ITEM	L(mm)
YD0502K	196

Fairlead Roller 滑轮导缆器




ITEM	L(mm)	W(mm)	H(mm)	Rope (mm)
YDK201	205	40	55	16/22
YDK202	260	45	75	24/30

Chocks 滑轮导缆器

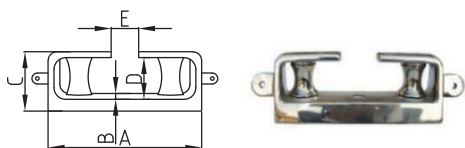


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YDK301	230	45	67	35	36

Luff slide 滑块

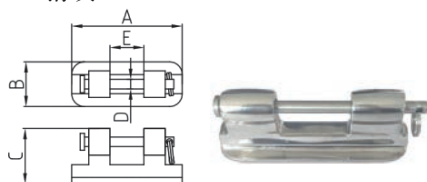


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YLS01	52	21	26	4.5	16

Lug 手柄

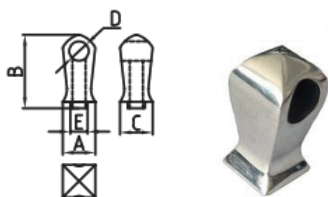


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YL01	15	34	15	9	8

Clip 金属夹

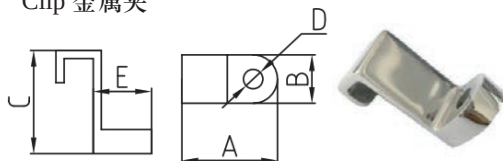


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YC01	30	15	32	6	18

Pothook 挂钩

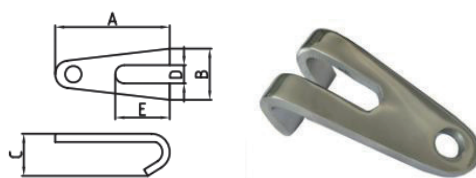

ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YP01	63	28	23	10	30

Chocks 导缆器



ITEM	L(mm)
YDK1900	196

Buckle Slide 皮带扣




ITEM	A(mm)	B(mm)
YBS01	60	30

Cam Buckle 皮带夹




ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YBS02	60	49	38	21

Cam Buckle 皮带夹

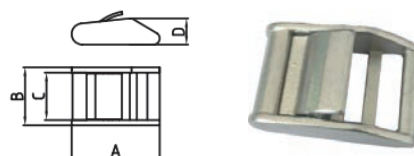


ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YBS03	50	33	27	15

Water ski tow 滑水圈

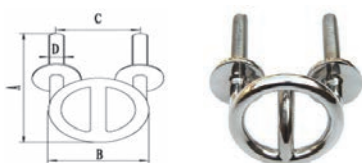


ITEM	A(mm)	B(mm)	C(mm)	D (mm)
YW011S	100	62	44	M10*60.5
YW012S	121	75.5	64	M10*80

Cleats Inox For Ropes 3/6 mm 夹绳器

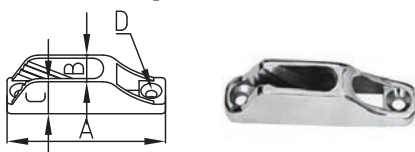

ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YD1011X	82	18	24	φ5.5*2
YD1012X	55	15	16.5	φ5.5*2
YD1013X	70	17	19	φ5.5*2

Cleats Inox For Ropes 3/6 mm 夹绳器




ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YD2011X	47.7	14.5	18	φ5.5

Cleats Inox For Ropes 3/6 mm 夹绳器




ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YD2012X	54.5	17	19	φ5.5

Connect Base 连接件底座

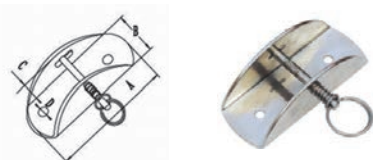


ITEM	A(mm)	B(mm)	C(mm)	D (mm)	E(mm)
YDS100	54	35	31.5	21.8	60

Connect Base 连接件底座

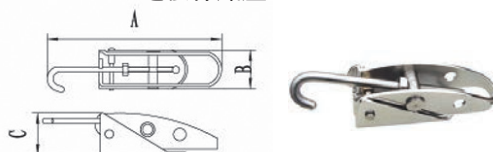


ITEM	A(mm)	B(mm)	C(mm)
YDA002	153	39	38

Stanchion 支座

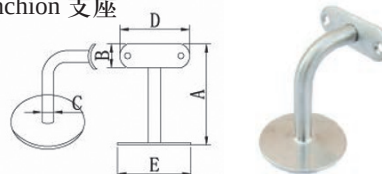


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YDS001C	86.5	23	7	62.3	62.4

Stanchion 支座

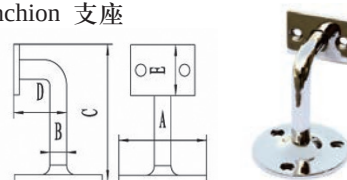


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YDS002C	63	12	83	40	31.8

Stanchion 支架




ITEM	A(mm)	B(mm)	C(mm)	D (mm)	E(mm)
YDS99	58.2	68.4	28.2	22.4	6.6

Stanchion 支架

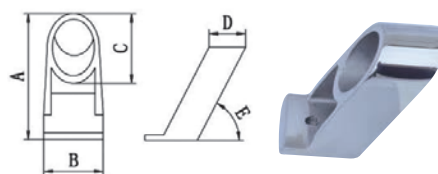


ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YDA001	101.5	40.2	35.6	φ5

Stanchion 支架




ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YDS110	66	31	22.4	5.5	1/4"-28

Stanchion 支架

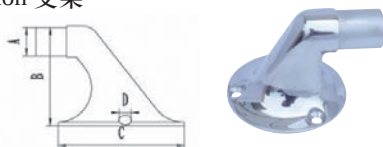


ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YDS111	22	54	67	Φ5.5

Stanchion Base 支架

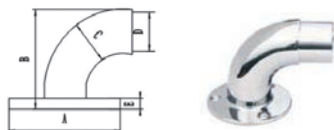

ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YDS112	75	72	31.7	29	3
YDS113	75	79	38.1	34.5	3

Stanchion 支架




ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YDS0801	22.2	35	65	Φ5.5
YDS0802	25.4	34	55.8	Φ5.5

Stanchion(Front) 船前支架



ITEM	A(mm)	B(mm)	C(mm)	D(mm)	Degree
YDS0301	22.2	39	47.6	5.5	60°
YDS0302	25.4	41	57.1	5.5	60°

Stanchion(Center) 船中支架

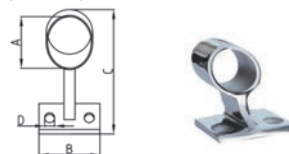


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	Degree
YDS0401	22.2	39	47.6	5.5	60°
YDS0402	25.4	41	57.1	5.5	60°

Stanchion(End) 船尾支架




ITEM	A(mm)	B(mm)	C(mm)	D(mm)	Degree
YDS0501	22.2	39	47.6	5.5	60°
YDS0502	25.4	41	57.1	5.5	60°

Stanchion(End) 船尾支架

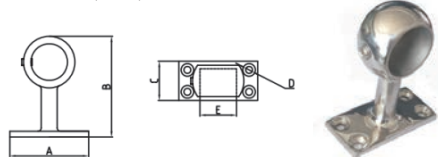

ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YDS000	69	88	34	6	32

Stanchion(Center) 船中支架



ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YDS114	68	60	25.4	5.5

Stanchion(End) 船尾支架



ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YDS115	25.4	44	67	5.5

Rail end(end-in) 栏杆支座



ITEM	A(mm)	B(mm)	C(mm)
YDR0101	110	22	Φ5.5*2

End-bottom mounted 90 栏杆支座



ITEM	A(inch)	B(mm)	C(mm)
YDR0201	7/8"	37	170
YDR0202	1"	38	170

Rail End (end-in) 栏杆支座




ITEM	A(inch)	B(mm)	L(mm)
YDR0301	7/8"	22	130

Pipe Base
栏杆座




ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YPB000	50	25.4	4	6

Pipe Base 栏杆座

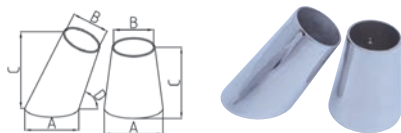


ITEM	A(mm)	B(mm)	C(mm)	D(°)
YDP01A	54	33	70	60
YDP02A	63.7	38	77	60
YDP01B	52	33	80	90
YDP02B	53	34	81	90
YDP03B	55	32	80	90
YDP04B	59.2	38	77	90

Pipe Base 栏杆座

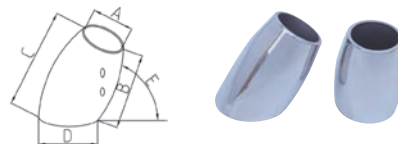

ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(°)
YPB011	26	28.5	56.4	44.4	90
YPB012	26	50	70	44.4	60
YPB013	31	50	40	47	60
YPB014	31.8	80	80	48.3	90

Pipe Base 栏杆座

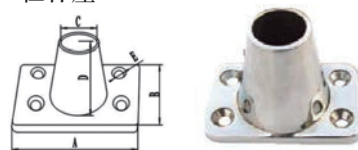


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YPB010	90	56	26	60	6

Mast Bracket 旗杆座



ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YMB03	51	40	6	42.5	5.5

Mast Bracket 旗杆座

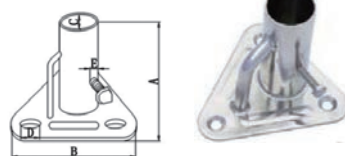


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YMB01	72.4	82.5	25.4	6.5	5

Mast Bracket 旗杆座



ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YMB02	95	75	81	29	7

Weldable round base 可焊圓管座




ITEM	A(inch)	B(°)
YD0101A	7/8"	45
YD0101B	1"	45
YD0102A	7/8"	60
YD0102B	1"	60
YD0103A	7/8"	90
YD0103B	1"	90

Weldable Rectangular Base 可焊方管座




ITEM	A(inch)	B(°)
YD0801A	7/8"	45
YD0801B	1"	45
YD0802A	7/8"	60
YD0802B	1"	60
YD0803A	7/8"	90
YD0803B	1"	90

Rectangular Base 方管座

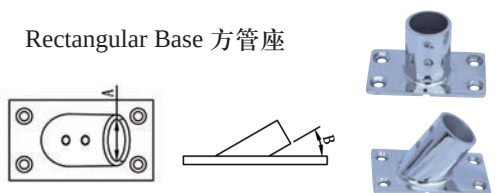


ITEM	A(inch)	B(°)
YD0201A	7/8"	30
YD0201B	1"	30
YD0202A	7/8"	45
YD0202B	1"	45
YD0203A	7/8"	60
YD0203B	1"	60
YD0204A	7/8"	90
YD0204B	1"	90
YD0205A	30mm	60°
YD0206A	30mm	90°

Round Base 圓管座




ITEM	A(inch)	B(°)
YD0701A	7/8"	30
YD0701B	1"	30
YD0702A	7/8"	45
YD0702B	1"	45
YD0703A	7/8"	60
YD0703B	1"	60
YD0704A	7/8"	90
YD0704B	1"	90
YD0705A	30mm	60°
YD0706A	30mm	90°

Rod Holder 魚竿座




ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(°)
YDH001A	270	50.8	112	87	45

Rod Holder 魚竿座

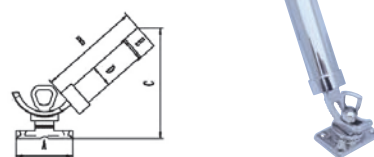


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YDH002A	55	220	340	50.8	54

Rod Holder 魚竿座

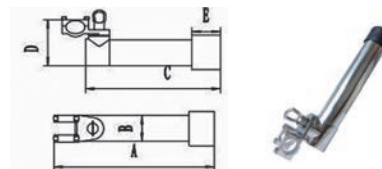

ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YDH003A	360	50.8	290	67	28

Rod Holder 鱼竿座

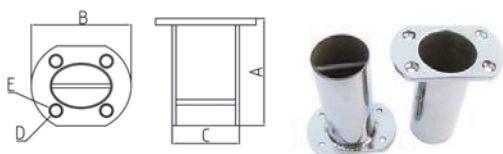


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YDH004A	98	80	41.8	5.1	9.4

Rod Holder 鱼竿座




ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(°)
YDH005A	61	83.5	92	42.6	90

Rod Holder 鱼竿座

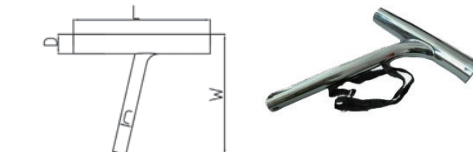


ITEM	C(inch)	D(inch)	L(inch)	W(inch)
YDH006A	1-1/2"	1-1/2"	19-1/2"	11-1/2"

Rod Holder 鱼竿座

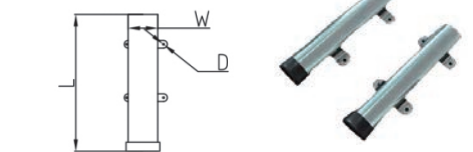


ITEM	D(mm)	L(mm)	W(mm)
YDH007A	6	250	50

Rod Holder 鱼竿座

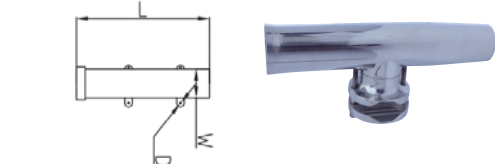

ITEM	L(inch)	W(inch)
YDH008A	9"	7/8"-1"
YDH008B	9"	1"-1-1/4"

Rod Holder 鱼竿座




ITEM	D(mm)	L(mm)	W(mm)
YDH009A	42	295	220
YDH009B	42	420	220

Rod Holder 鱼竿座




ITEM	D(mm)	L(mm)	W(mm)
YDH009C	50	800	220

Side-mounte Deck Hinge 天线座




ITEM	A(mm)	B(mm)	C(mm)
YDH0401	50.8	22.2	16.5

Deck hinge 90° concave base 栓式正山型座

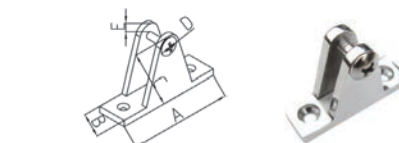


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YHD010	57.15	22.22	38.5	1/4-20	5.5*2
YHD011	57.15	25.4		1/4-20	
YHD012	57.15	22.22	38.5	6*40	5.5*2
YHD013	57.15	25.4		6*40	

Deck Hinge with Concave 栓式山型座



ITEM	B(mm)	L(mm)	H(mm)
YHD020	22	56	38
YHD021	25	60	37


Deck Hinge with Concave 销式山型座



ITEM	B(mm)	L(mm)	H(mm)
YHD030	22	56	38
YHD031	25	60	37


Deck Hinge with Concave

栓式山型座




ITEM	B(mm)	L(mm)	H(mm)
YHD040	18.5	60	36

Deck Hinge Base 销式山型座

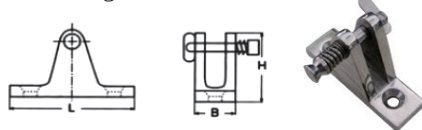


ITEM	B(mm)	L(mm)	H(mm)
YHD050	18.5	60	36

Heavy—Deck Hinge Base 重型山型座



ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YHD060	21	5	27	37	54

Deck Hinge Base-60° 60 度栓式山型座

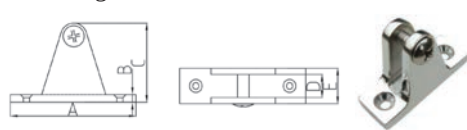


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YHD070	61	5.4	37	8	18.5

Deck Hinge 山型座




ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YHD080	61	80.6	44	5	10

Strainer 过滤器




ITEM	A(inch)	B(mm)	C(mm)	D(mm)
YDS1401	3/8"	79	94	46.4
YDS1402	1/2"	90.4	99	46
YDS1403	3/4"	104.5	106	57
YDS1404	1"	105	106.5	60
YDS1405	1-1/4"	117	103	64.4
YDS1406	1-1/2"	132.5	113	70.5
YDS1407	2"	126	154	86
YDS1408	2-1/2"	200	156	112
YDS1409	3"	290	160	135

Deck filler in steel 加油口

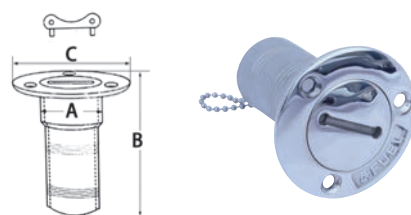

ITEM	TYPE	A(mm)
YDS1601	Fuel	38
YDS1602	Fuel	50
YDS1603	Diesel	38
YDS1604	Diesel	50
YDS1605	Water	38
YDS1606	Water	50
YDS1607	Waste	38
YDS1608	Waste	50
YDS1609	Gas	38
YDS1610	Gas	50

Deck filler 加油口

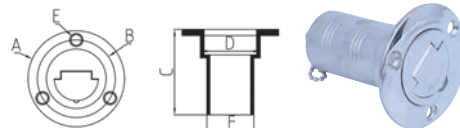


ITEM	A	B	C	D	E	F
YDF011-Fuel	74	60	83.4	G1-1/4"-11	6	38
YDF012-Diesel	74	60	83.4	G1-1/4"-11	6	38
YDF013-Waste	74	60	83.4	G1-1/4"-11	6	38
YDF014-Water	74	60	83.4	G1-1/4"-11	6	38
YDF015-Gas	74	60	83.4	G1-1/4"-11	6	38

Deck Filler 加油口




ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
Y001-Fuel	90	3.5	80	81	50.5
Y002-Diesel	90	3.5	80	81	50.5
Y003-Waste	90	3.5	80	81	50.5
Y004-Water	90	3.5	80	81	50.5
Y005-Gas	90	3.5	80	81	50.5

Deck Filler 加油口




ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YDS1701- Fuel	45	45	38	73
YDS1702- Fuel	50	50	50	88
YDS1703- Diesel	45	45	38	73
YDS1704- Diesel	50	50	50	88
YDS1705- Waste	45	45	38	73
YDS1706- Waste	50	50	50	88
YDS1707- Water	45	45	38	73
YDS1708- Water	50	50	50	88
YDS1709- Gas	45	45	38	73
YDS1710- Gas	50	50	50	88

Deck Filler 加油口




ITEM	Inch	A(mm)	B(mm)	C (mm)	D(mm)
YDS1801-Petrol	1.5"	74	78	38.1	5.8
YDS1802-Gas	1.5"	74	78	38.1	5.8
YDS1803-Diesel	1.5"	74	78	38.1	5.8
YDS1804-Water	1.5"	74	78	38.1	5.8
YDS1804-Diesel	2"	82	88	50.8	5.7
YDS1805-Gas	2"	82	88	50.8	5.7
YDS1806-Water	2"	82	88	50.8	5.7

Deck Filler 加油口



ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YDS1901	99	33	53	58	5

Deck Filler 加油口




ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YDS2001	73	80.5	38	4.5	24.5

Through Hull Outlets 出水口




ITEM	A(inch)	B(mm)	C(mm)	D(mm)	E(mm)
YDT1001	3/8"	58	35.3	11.8	52.5
YDT1002	1/2"	62	39.3	15.3	58
YDT1003	3/4"	73	49	19	62
YDT1004	1"	80	54	25	71
YDT1005	1-1/4"	83	63	34	76
YDT1006	1-1/2"	85	70	38	79
YDT1007	2"	101	84	50.8	95

Through Hull Outlets With Hose Connection
加长出水口

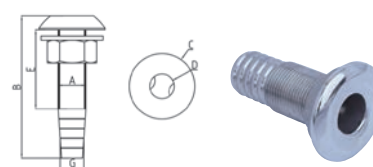

ITEM	A	B	C	D	E	G
YDT2001	3/4"	101	47	19.5	55	23
YDT2002	1"	102	55	26	55	29
YDT2003	1-1/2"	102	70.5	39	55	43

Through Hull Outlets With Hose Connection
加长出水口


ITEM	A	B	C	D	E	G
YDT3001	1/2"	62	39	13	41	16
YDT3002	3/4"	70	50	18.7	49	23.5
YDT3003	1"	76	53.5	24.4	53	29
YDT3004	1-1/4"	80	63	32.5	54	36
YDT3005	1-1/2"	82	71.5	39	61	43

Through Hull Outlets 出水口



ITEM	A	B	C	D	E	G
YDT4001	3/8"	57.5	36	7.5	25.5	12
YDT4002	1/2"	62	38.5	11.5	33	16
YDT4003	3/4"	73.2	47	17	42	23.5
YDT4004	1"	78	55.5	23	44	29
YDT4005	1-1/4"	83	66	29	45	36
YDT4006	1-1/2"	85	70.5	33	46	43
YDT4007	2"	99.5	85	47	52	53.5

Tank Vent 漏水口



ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YTV00	82	60	37.5	φ5

Tank Vent 漏水口




ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YTV01	76	60	4	31.8

Tank Vent 漏水口




ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YTV02	76	99	31.8	4

Tank Vent 漏水口




ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YTV03	63	16	35	6.6
YTV04	45.6	24.6	25.5	6.5

Tank Vent 漏水口

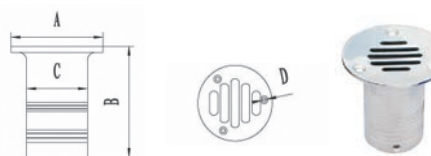


ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YTV05	80	80	50.8	5.5

Tank Vent 透气口

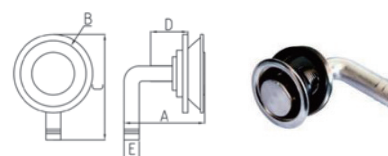


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YTV06	67	46	66	28	16

Tank Vent 透气口




ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YTV07	66	68	18*1.5	16	9

Tank Vent 透气口




ITEM	A(mm)	B(mm)	C(mm)	D(inch)
YTV08	80	65.5	46	3/4"
YTV09	104	83	62	1"

Tank Vent 透气口

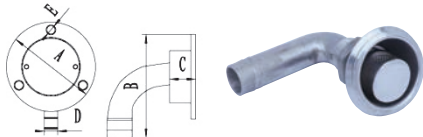


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YTV10	64.5	92	16	16	5

Tank Vent 透气口




ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YTV11	66	68	18*1.5	16	9

Tank Vent 透气口

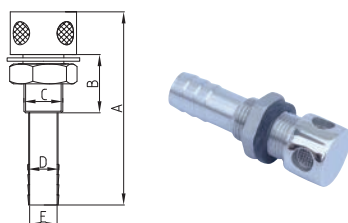


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YTV12	84	25.4	18*1.5	16	12

Clamshell Vent 通风盖

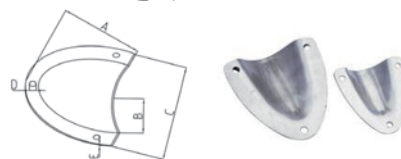


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YCV01	43.3	10.5	42.4	3	0.7
YCV02	58	12.8	55.1	4.1	0.8

Deck Plate 圆盘

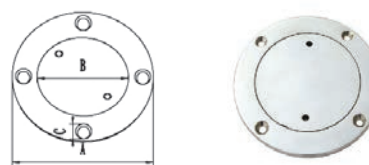


ITEM	A(mm)	B(mm)	C(mm)
YD081	76.2	65	5.7
YD082	101.6	90	5.7
YD083	127	110	8

Tope Slide 滑套

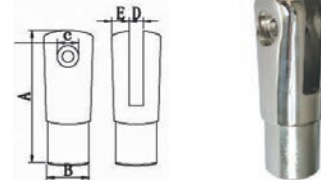


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YD07F	93	28.8	15.3	10.5	11

Tope Slide 滑套

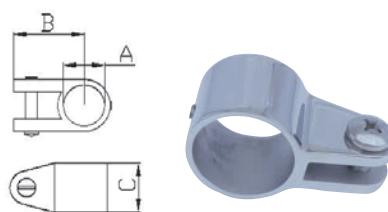


ITEM	A(mm)	B(mm)	C(mm)
YD01P	22.2	37	29
YD02P	25.4	38	31.5
YD03P	30	48	37.5
YD04P	32	50	39

Heavy duty tope slide 重型滑套

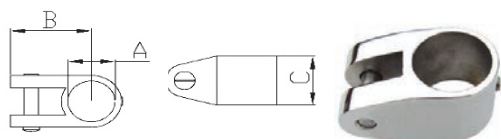


ITEM	A(inch)	B(mm)	C(mm)
YD0101P	7/8"	40	28
YD0102P	1"	57	29.5

Fastening For Boat Corer 管夹




ITEM	Pipe(mm)
YD01F	19/22/25

Tope Slide 滑套




ITEM	A(inch)
YD02F	7/8"
YD03F	1"
YD04F	1-1/4"

Tope Slide 滑套




ITEM	A(mm)	B(mm)	C(mm)	D(inch)	E(mm)
YD08F	19	49.8	23.4	1/4"-20	6
YD09F	22.2	57	27	1/4"-20	7
YD10F	25.4	70.5	28	1/4"-20	7.3
YD11F	31.75	78	28.5	1/4"-20	8.5

Top Cap 滑帽




ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YT002C	66	31.8	1/4"-28	8.2	6.3

Top Cap 滑帽




ITEM	A(mm)
YDS0201	22
YDS0202	25
YDS0203	30
YDS0204	32

Top Cap 滑帽




ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YT003C	22.2	59	7	1/4"-28	6.5
YT004C	25.4	59	7	1/4"-28	6.5

Top Cap 球型滑帽



ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YT005C	62.5	27	22.2	1/4"-28
YT006C	62.5	30.5	25.4	1/4"-28

Top Cap 滑帽

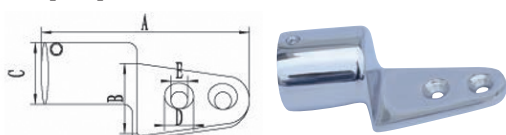


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YT007C	58	28	25.4	1/4"-28	10

Knuckle Joint 连接管



ITEM	A(mm)	D(mm)
YK01	38.5	39.2
YK02	22	25

Swivelling Joints 连接管

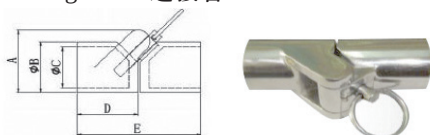


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YSJ01	40.5	28.3	22.8	38.5	77
YSJ02	39.5	32.2	26	37.5	75.5

Tube connection 连接管




ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YSJ03	73	70	23.45	52	48

Tube connection 连接管

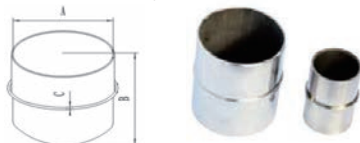


ITEM	A(mm)	B(mm)	C(mm)
YSJ04	35.4	53	2.6
YSJ05	47.8	53	3
YSJ06	60.5	67.5	4

Tees with cable eyelet 90° 90度带缆孔三通

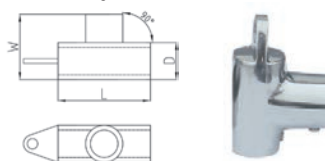


ITEM	L(mm)	D(mm)	W(mm)
YDT0101	22	52	52

Tees with cable eyelet 60° 60度带缆孔三通

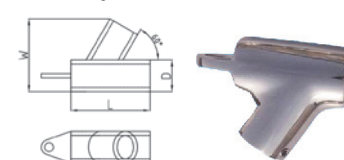


ITEM	L(mm)	D(mm)	W(mm)
YDT0201	22	48	57

60° Tee Hand 60度三通

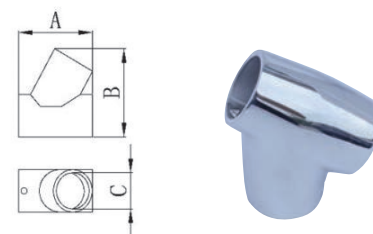


ITEM	A(mm)	B(mm)	C(mm)	D(°)
YDT0301	22	48	57	60
YDT0302	25	53	60	60
YDT0303	32	79	79	60

90° Tee Hand 90度三通

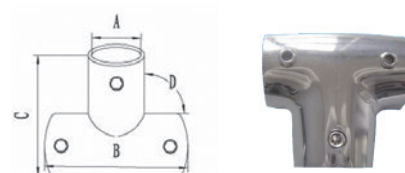


ITEM	A(mm)	B(mm)	C(mm)	D(°)
YDT0401	22	52	52	90
YDT0402	25	55	55	90
YDT0403	30	76	83	90

Tees 三通

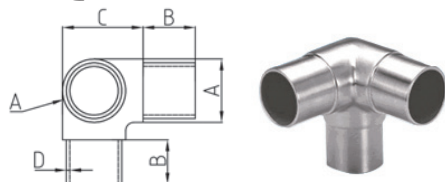

ITEM	Dimension	A	B	C	D
EC301	1-1/2"	37.8	28	42	2.5
EC302	2"	48.3	37	74	2.5

Tees 三通

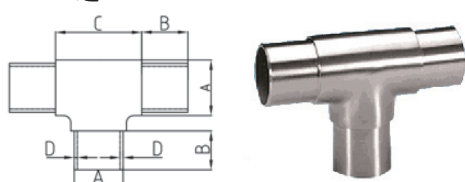


ITEM	Dimension	A	B	C	D
EC501	1-1/2"	37.8	28	55	2.5
EC502	2"	48.3	37	74	2.5

Tees 三通




ITEM	A(mm)	B(mm)
EC1001	75	35.4
EC1002	82	47.8

Tees 四通

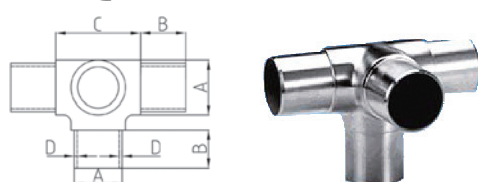


ITEM	Dimension	A	B	C	D
EC101	1-1/2"	37.8	28	55	2.5
EC102	2"	48.3	37	74	2.5

Tees 四通

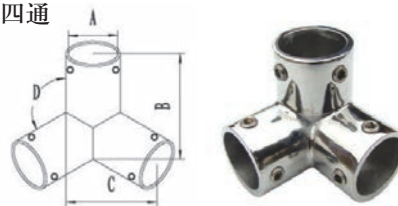


ITEM	A(mm)	B(mm)	C(mm)	D(°)
EC901	22.2	40	40	90
EC902	25.4	50	50	90

Cross 四通

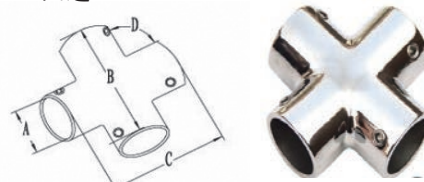


ITEM	A(mm)	B(mm)	C(mm)	D(°)
EC2001	22.2	62	62	90
EC2002	25.4	71	71	90

Cross 四通

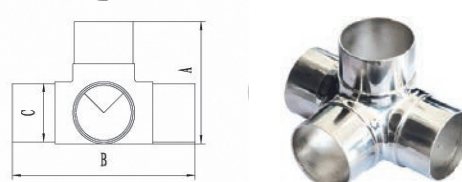


ITEM	A(mm)	B(mm)	C(mm)
EC3001	76	111	35.4
EC3002	83	117	47.8

Cross 四通

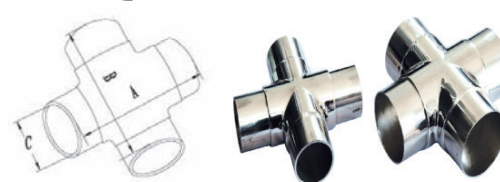

ITEM	A(mm)	B(mm)	C(mm)
EC4001	110	110	35.4
EC4002	118	118	47.8

Elbow Forms 弯头

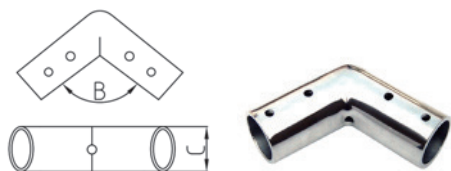


ITEM	B(°)	C(inch)
YDS0901A	110	7/8"
YDS0901B	110	1"
YDS0902A	120	7/8"
YDS0902B	120	1"
YDS0902C	140	7/8"

Elbow 弯头




ITEM	A(mm)	B(°)	C(mm)	D(mm)
EC801	105	135	28.9	25.4
EC802	110	135	35.4	25.4

Elbow 弯头

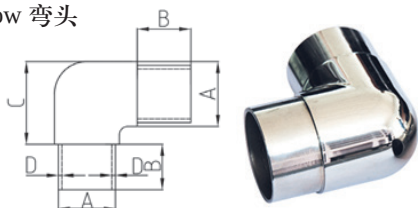


ITEM	Dimension	A	B	C	D
EC201	1-1/2"	37.8	28	42	2.5
EC202	2"	48.3	37	74	2.5

Elbow 弯头

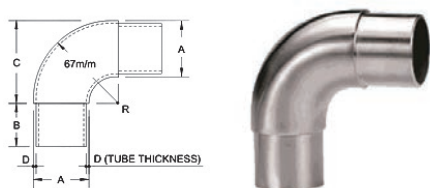


ITEM	Dimension	A	B	C	D
EC401	1-1/2"	37.8	28	42	2.5
EC402	2"	48.3	37	74	2.5

Elbow 弯头

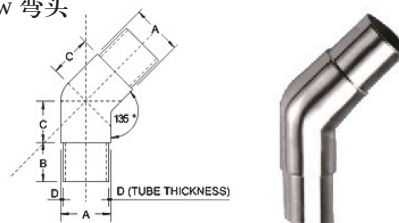


ITEM	Dimension	A	B	C	D
EC601	1-1/2"	37.8	28	13	2.5
EC602	2"	48.3	37	20	2.5

Elbow 弯头

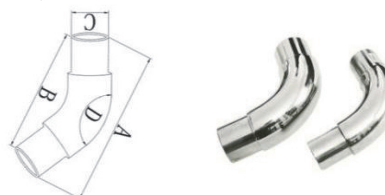


ITEM	A(mm)	B(mm)	C(mm)	D(°)
ED10	110	73	22.2	90
ED11	120	88	28.8	90
ED12	123	79	35.4	90
ED13	127	62	47.8	90
ED14	145	64	60.1	90

Elbow 弯头

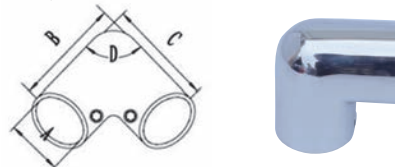


ITEM	A(mm)	B(mm)	C(mm)	D(°)
ED20	22.2	50	50	90
ED21	25.4	51	51	90
ED22	30	58.5	58.5	90

Elbow 弯头

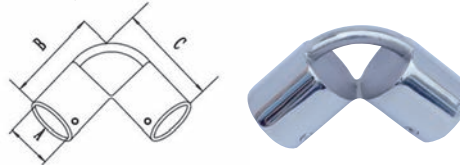


ITEM	A (mm)	B(mm)	C(mm)
ED30	22.2	60	60

Insert 塞头

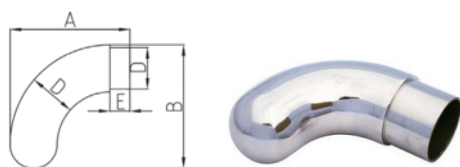


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
ED40	95	95	38.1	34.5	25

Insert 塞头

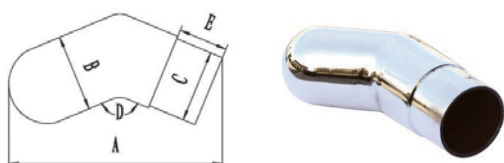


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
ED50	112	38.1	35.6	135	25
ED51	118	50.8	48	135	25

Insert 塞头

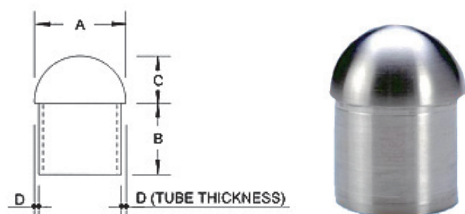


ITEM	Dimension	A	B	C	D
EC701	1-1/2"	37.8	28	11	2.5
EC702	2"	48.3	37	15	2.5

Insert 塞头

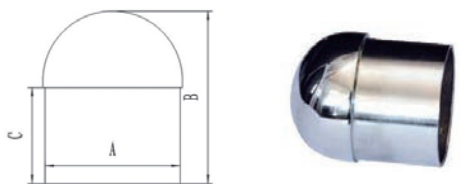


ITEM	A(mm)	B(mm)	C(mm)
EL01	35.4	43	24
EL02	47.8	57	25.4

Bullet End Plug 子弹头

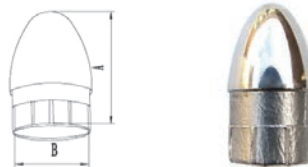


ITEM	A(mm)	B(mm)
EL03	38	20

Eccentric Latch 搭扣

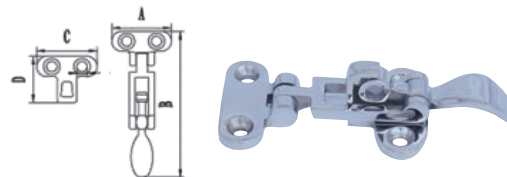


ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YDH0301	50	110	49	40

Eccentric Latch 搭扣

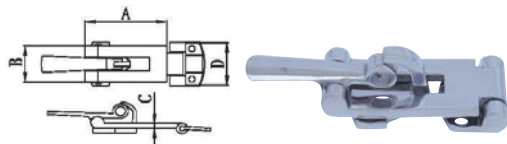


ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YDL2301	62	30	5	37

Eccentric Latch 搭扣

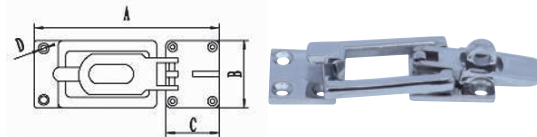


ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YDL2302	98	27	27	4.5

Eccentric Latch 搭扣

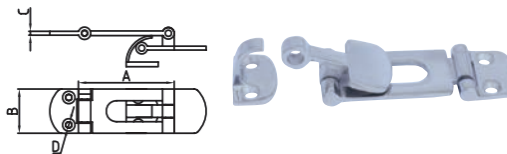


ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YDL2303	62	28.5	3	4

Lift Ring 地板扣

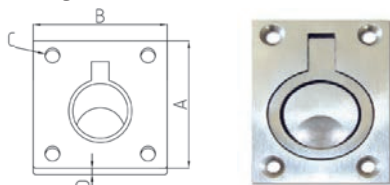


ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YDH0101	38	48	4.5	2.6
YDH0102	62	44	4.5	5

Lift Ring 地板扣

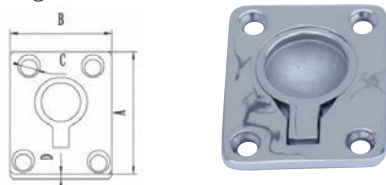


ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YDL001R	48	38	4.5	3

Hatch Cover Hinge 舱盖铰链

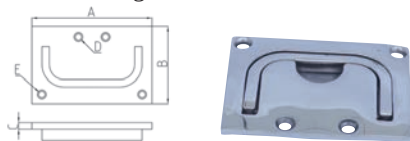


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YDL003R	76	57.5	3	5	6

Lift Ring 地板扣

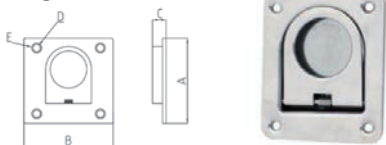


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YDL004R	66	56	8.3	4	7

Lift Ring 地板扣




ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YDL005R	44	38	4.5	2

Lift Ring 地板扣

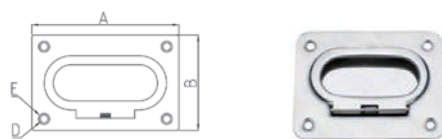


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YDL006R	75	58	8	4	8.2

Lift Ring 地板扣

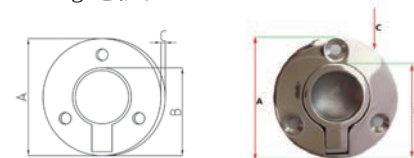


ITEM	A(mm)	B(mm)	C(mm)
YDL007R	51	41	3

Turning Lock Lift Handle 地板锁

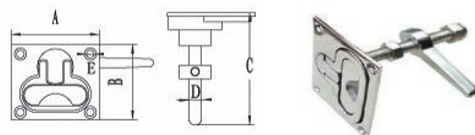


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YDH0201	96	76	125	10	5.3

Turning Lock Lift Handle 地板锁

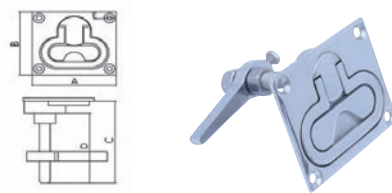


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YDH001T	78	66	107.5	88	5

Turning Lock Lift Handle 地板锁

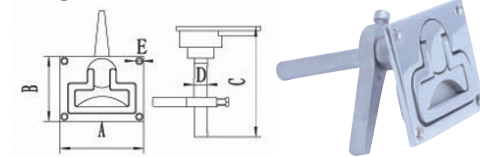


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YDH002T	66.67	79.37	111.12	12	5.3

Turning Lock Lift Handle 地板锁

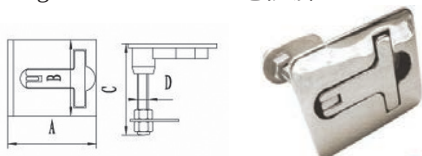


ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YDH003T	89	76	84	1/2"-13

Turning Lock Lift Handle 地板锁

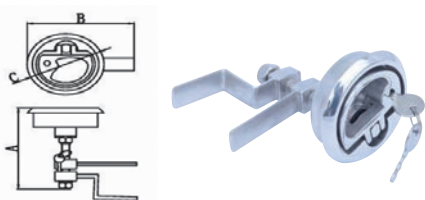


ITEM	A(mm)	B(mm)	C(mm)
YDH004T	82	87	60

Turning Lock Lift Handle 地板锁

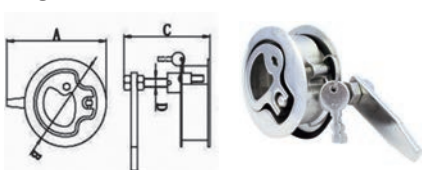


ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YDH005T	72	60	66	8

Turning Lock Lift Handle 地板锁

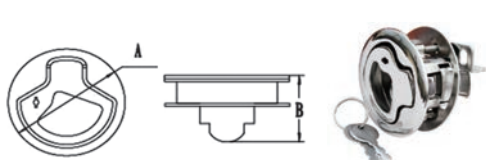


ITEM	A(mm)	B(mm)
YDH006T	61.5	36

Turning Lock Lift Handle 地板锁

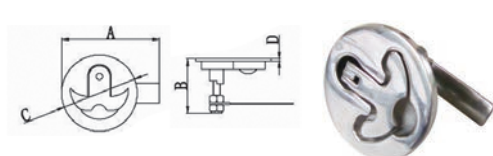


ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YDH007T	70	58.3	62	5

Hinge 铰链



ITEM	L(mm)	W(mm)
YDG001	180	130

Hinge 铰链




ITEM	L(mm)	W(mm)
YDG002A	65	65
YDG002B	75	75
YDG002C	50	50

Hinge 铰链




ITEM	L(mm)	W(mm)
YDG003	100	100

Hinge 铰链

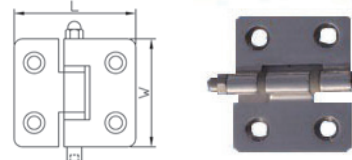


ITEM	L(mm)	W(mm)	W(mm)
YDG004	100	100	100

Hinge 铰链

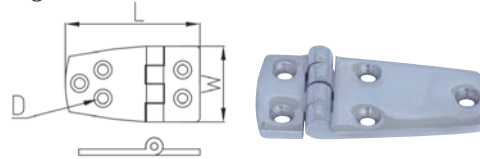


ITEM	L(mm)	W(mm)	D(mm)
YDG005	84	40	5.5

Hinge 铰链

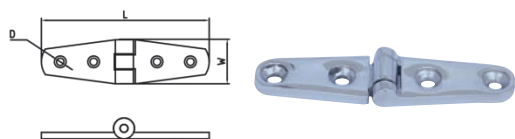


ITEM	L(mm)	W(mm)	D(mm)
YDG006A	100	25	φ5.5
YDG006B	146	23	φ5.5

Hinge 铰链

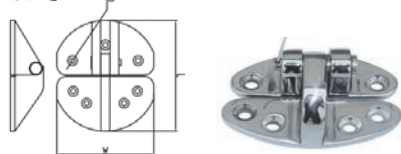


ITEM	L(mm)	W(mm)	D(mm)
YDG007	74	56	φ5.5

Hinge 铰链

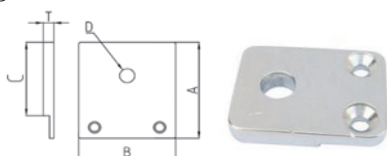


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	T(mm)
YI04	40	39.7	36	φ5	4

Hinge 铰链

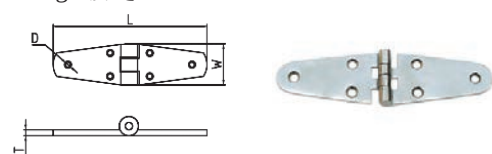


ITEM	L(mm)	W(mm)	D(mm)	T(mm)
YDG010	79	40	φ5.5	2

Hinge 铰链

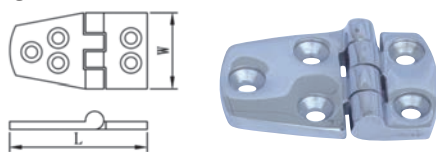


ITEM	L(mm)	W(mm)	D(mm)
YDG011A	56.2	38.5	φ5.5
YDG011B	74.6	38.5	φ5.5

Hinge 铰链

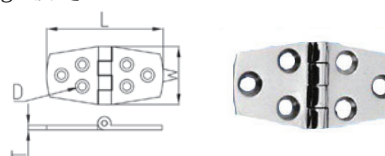


ITEM	L(mm)	W(mm)	D(mm)	T(mm)
YDG012	76.2	38.1	φ5	4

Hinge 铰链




ITEM	A(inch)	B(inch)	C(mm)	D(mm)
YDH011	4"	4"	4.5	φ5

Hinge 铰链




ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YDH031	2-1/2"	2-1/2"	1.5	φ5
YDH032	2-1/2"	2-1/2"	2	φ5
YDH033	3"	3"	2	φ5

Hinge 铰链

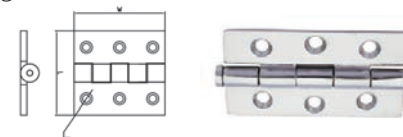


ITEM	A(inch)	L(inch)	C(mm)	D(mm)
YDH041	2-1/2"	2-1/2"	1.5	φ5
YDH042	2-1/2"	2-1/2"	2	φ5
YDH043	3"	3"	2	φ5

Deck Hinge Plate 甲板铰链




ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YDG060A	74.6	47.6	32	φ7*4

Hinge 铰链

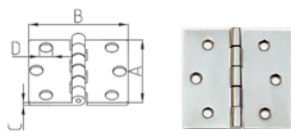


ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YDG070A	38	38	1.5	Φ4.5
YDG070B	51	51	1.5	Φ5
YDG070C	64	64	1.5	Φ5.5

Hinge 铰链

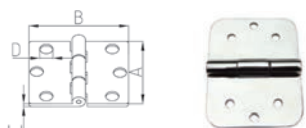


ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YDG093	95	75	2	Φ6.7

Hinge 铰链

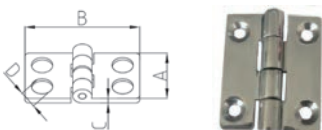


ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YDG080A	38	38	4.5	Φ5.5
YDG080B	51	51	4	Φ5.5
YDG080C	64	64	3	Φ7

Hinge 铰链



ITEM	A (mm)	B(mm)	C(mm)	D(mm)	E(mm)
Y105	56	30	22.5	5	5.4

Hinge 铰链

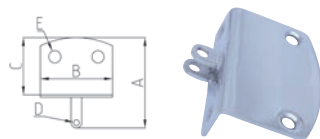

ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
Y106	79.5	89.5	58	7	Φ8

Hinge 铰链




ITEM	A(mm)	B (mm)	C(mm)	D (mm)	E(mm)
Y107	144.6	64	4	99	Φ7

Hinge 铰链



ITEM	A(mm)	B(mm)	C(mm)	D(mm)
Y108	75	38	3.5	Φ5.5

Hinge 铰链




ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YDG094	127	37	2	Φ5

Hinge 铰链



ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YDG095	202	69	5	Φ10.5

Hinge 铰链

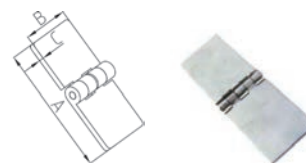


ITEM	A(mm)	B(mm)	C(mm)
Y109	220	78	5

Hinge 铰链




ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
Y110	121	39.5	3	31	6.2

Hinge 铰链




ITEM	A(mm)	B(mm)	C(mm)	E(mm)
Y111	80	63	3	4

Hinge 铰链

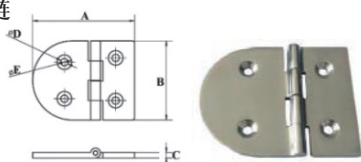


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
H001	83.5	65	4.5	φ5	φ10

Hinge 铰链

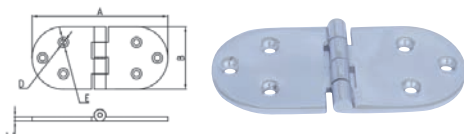


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
H002	127	59	4	5.7	9

Hinge 铰链

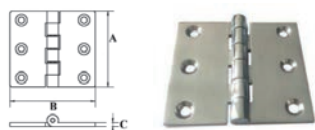


ITEM	A(mm)	B(mm)	C(mm)
H003	66	75	3

Hinge 铰链

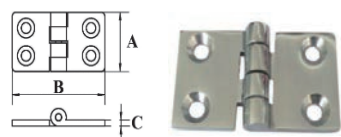


ITEM	A(mm)	B(mm)	C(mm)
H004	30	54	3

Hinge 铰链

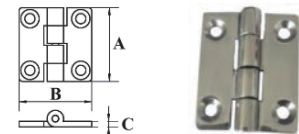


ITEM	A(mm)	B(mm)	C(mm)
H005	40	40	3

Hinge 弧面铰链

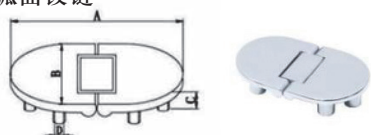


ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YI02	99.95	61.2	19.05	6

Hinge 弧面铰链




ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YI03	38.1	20	20	3	8-32

Hinge 弧面铰链

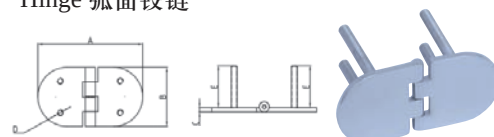


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
H006	80	40	3.5	6	50

Hinge 弧面铰链

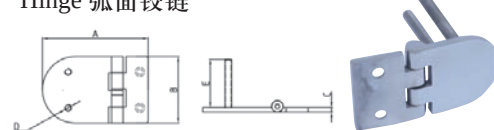


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
H007	103	65	4	6	20

Hinge 弧面铰链




ITEM	D(mm)	L(mm)	W(mm)	T(mm)
YD701H	φ5.5	40	48	4

Hinge 铰链

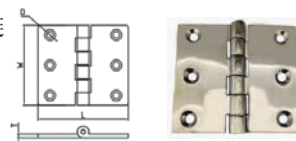


ITEM	D(mm)	L(mm)	W(mm)	T(mm)
YD16H	φ5.3	75	65	4

Hinge 铰链




ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YD7262	71	65	4.8	φ6	65

Hinge 铰链

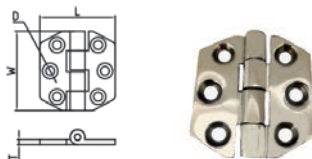


ITEM	D(mm)	L(mm)	W(mm)	T(mm)
YD012A	Φ5.1	44	46	4

Hinge 铰链

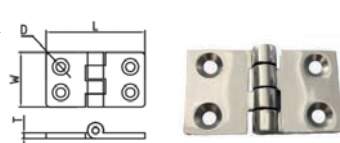

ITEM	D(mm)	L(mm)	W(mm)	T(mm)
YD151H	Φ5.1	53	30	4

Hinge 铰链

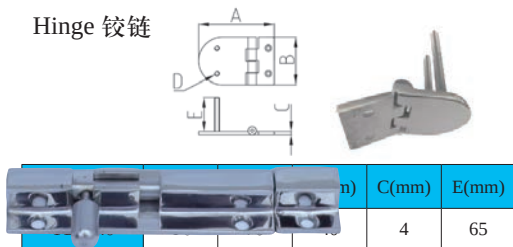


ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YDG051A	122.5	50	2.8	Φ6

Hinge 铰链




ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YDG096	64.7	25	2	Φ6	Φ3.5

Hinge 铰链




ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YI21	112.4	40	3.2	8.5	6.2
YI22	132.5	40	3.2	8.5	6.2

Lock 插销




ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YDG098	93.5	39	3.4	5

Lock 插销




ITEM	A(mm)	B(mm)	C(mm)	D(mm)
HL01	78	19	26	5

Handle 把手



ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
HD21	148.5	34.5	48.5	105	10.4

Handle 把手



ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
HD31	96	10.5	19.6	4.5	79.5
HD32	134	14.2	28	4.5	114
HD33	160.3	16	22	5.5	147
HD34	195.5	18	25	5.5	176

Handle 把手



ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
HD41	127	55	14	17.5	25

Handle 把手



ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
HD51-12"	304.8	280	6M	25	16-35

Handrail 扶手



ITEM	A(mm)	B(mm)	C(mm)
HD01	40	120	12
HD02	71.5	113.5	12.5

Pad Eye 骆驼背




ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YP001E	40	13	20	4

Pad Eye 骆驼背




ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YP002E	44	15	16	5.7	6
YP003E	35	12.5	14.5	5	4.5
YP004E	34	11.5	14	4	4
YP005E	33	10.5	14	4	4.5

Pad Eye 骆驼背



ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YP006E	97	29.4	23.7	6	5

Pad Eye 骆驼背




ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YP008E	48.5	13	14.5	4	5
YP009E	48.5	13	20	4	5.5
YP010E	48.5	13	14	5	4

Square Eye Plate 门鼻子




ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YE001S	35	30	19	14	4
YE002S	40	35	26	18	5
YE003S	50	40	33	20	6

Square Eye Plate 门鼻子

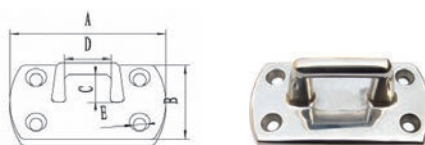


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YE004S	84	44	30	24	5

Square Eye Plate 门鼻子

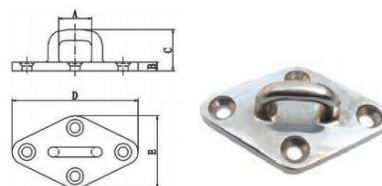


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YE005S	19	5	24	80	50
YE006S	22	5.5	28	90	55
YE007S	25	6	34	100	62

Square Eye Plate 门鼻子

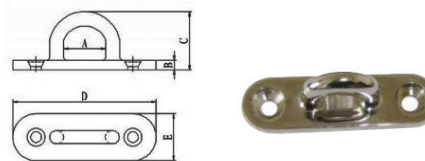


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YE008S	16	5	24	75	22
YE009S	19	5.5	28	88	32
YE010S	22	6	34	100	36

Steering Wheel 方向盘

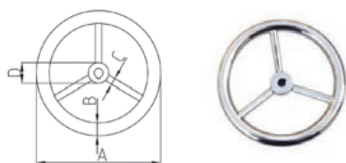


ITEM	A(mm)	B(mm)	C(mm)	D(mm)
SW01	195	20	12	35

Steering Wheel 方向盘

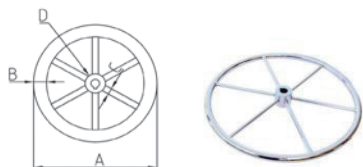


ITEM	A(mm)	B(mm)	C(mm)	D(mm)
SW02	720	22	12	55
SW03	510	22	12	55
SW04	375	22	12	55

Steering Wheel 方向盘

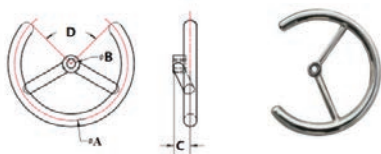

ITEM	A(mm)	B(mm)	C(mm)	D(°)
SW05	300	25	35	90

Ladder 梯子



ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(°)
LA01	330	210	22	100	95

Ladder 梯子




ITEM	A(mm)	B(mm)	C(mm)	D(mm)
LA02	600	275	280	120

Ladder 梯子




ITEM	A(mm)	B(mm)	C(mm)	D(mm)
LA03	875	280	275	123

Four Telescopic Ladder 梯子

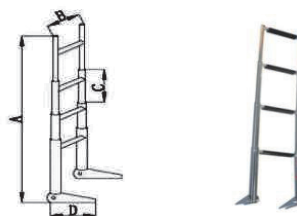


ITEM	A(mm)	B(mm)	C(mm)	D(mm)
LA04	1160	255	285	120

Connection 油箱接头

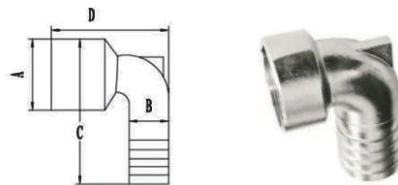

ITEM	A(mm)	B(mm)	C(mm)	D(mm)
CO01-1-1/2"	53.6	38.1	101	68

Connection 接头

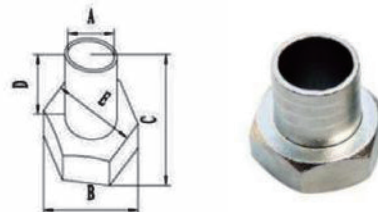

ITEM	A(inch)	B(mm)	C(mm)	D(mm)	E(mm)
CO02	3/4"	30	43	27	30
CO03	1"	36	43	26	36
CO04	1-1/4"	51	59	44	44
CO05	1-1/4"	59	61	46	52.5

Female Hose Connector 内丝水管接头



ITEM	Thread(inch)	Hose adapter size(mm)
HC001	3/8"	15
HC002	1/2"	15
HC003	1/2"	20
HC004	3/4"	20
HC005	3/4"	25
HC006	1"	25
HC007	1"	30
HC008	1-1/4"	35
HC009	1-1/4"	40
HC010	1-1/2"	45
HC011	2"	50

Male Hose Connector 外丝水管接头



ITEM	Thread(inch)	Hose adapter size(mm)
HC200	3/8"	12
HC201	3/8"	15
HC202	1/2"	15
HC203	1/2"	20
HC204	3/4"	20
HC205	3/4"	25
HC206	1"	25
HC207	1"	30
HC208	1-1/4"	35
HC209	1-1/4"	40
HC210	1-1/2"	45
HC211	2"	50
HC212	2"	60
HC213	2-1/2"	70
HC214	3"	78

Pipe Caps 管帽



ITEM	Thread(inch)
PC100	3/8"
PC101	1/2"
PC102	3/4"
PC103	1"
PC104	1-1/4"
PC105	1-1/2"
PC106	2"

Hex Pipe Reducing Coupling 六角管接头



ITEM	Thread(inch)
RC001	3/8"×1/4"
RC002	1/2"×3/8"
RC003	3/4"×1/2"
RC004	1"×3/4"
RC005	1-1/4"×1"
RC006	1-1/2"×1/4"
RC007	2"×1-1/2"
RC008	1-1/2"×1-1/4"
RC009	3"×2-1/2"

Pipe Coupling 管接头



ITEM	Thread(inch)
PC001	3/8"
PC002	1/2"
PC003	3/4"
PC004	1"
PC005	1-1/4"
PC006	1-1/2"
PC007	2"

90° Pipe Elbows 90 度管弯头



ITEM	Thread(inch)
PL001	3/8"
PL002	1/2"
PL003	3/4"
PL004	1"
PL005	1-1/4"
PL006	1-1/2"
PL007	2"

45° Pipe Elbows 45 度管弯头



ITEM	Thread(inch)
PL201	3/8"
PL202	1/2"
PL203	3/4"
PL204	1"
PL205	1-1/4"
PL206	1-1/2"
PL207	2"

90° Pipe Elbows 90 度管弯头



ITEM	Thread(inch)
PL100	3/8"
PL101	1/2"
PL102	3/4"
PL103	1"
PL104	1-1/4"
PL105	1-1/2"
PL106	2"

Hose Adapter 90° 管接头



ITEM	Thread(inch)	Hose adapter size(mm)
HA001	1/2"	20
HA002	3/4"	25
HA003	1"	30
HA004	1-1/4"	38

Double Pipe Nipples 六角外牙接头



ITEM	Thread(inch)
DP001	3/8"
DP002	1/2"
DP003	3/4"
DP004	1"
DP005	1-1/4"
DP006	1-1/2"
DP007	2"

Valves 球阀



ITEM	Thread(inch)
VA01	3/8"
VA02	1/2"
VA03	3/4"
VA04	1"
VA05	1-1/4"
VA06	1-1/2"
VA07	2"
VA08	2-1/2"
VA09	3"


Automatic drain valve 自动排水阀



ITEM	A(mm)	B(mm)	C(mm)	H(mm)
VA10	91	65	50	84


Shackles 卸扣

EYE BOLT DIN580 吊环螺丝




ITEM	D1(mm)	H(mm)	D2(mm)
YB0101	6	28	15
YB0102	8	36	20
YB0103	10	45	25
YB0104	12	54	30
YB0105	14	59	33
YB0106	16	63	35
YB0107	18	68	38
YB0108	20	72	40
YB0109	22	81	45
YB0110	24	90	50
YB0112	26	100	55
YB0113	30	108	60
YB0114	32	117	65
YB0115	36	128	70
YB0116	42	140	78
YB0117	48	155	89

EYE BOLT DIN582 吊环螺母

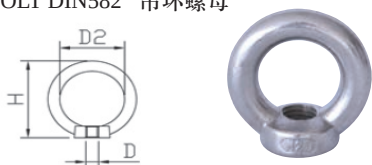


ITEM	D(mm)	H(mm)	D2(mm)
YB0201	6	28	16
YB0202	8	36	20
YB0203	10	45	25
YB0204	12	53	30
YB0205	14	58	32
YB0206	16	62	35
YB0207	18	67	38
YB0208	20	71	40
YB0209	22	82	45
YB0210	24	90	50
YB0211	26	99	55
YB0212	30	109	60

EYE BOLT JIS1168 吊环螺丝




ITEM	A(mm)	B(mm)	C(mm)
YB0301	6	30	16
YB0302	8	39.3	20
YB0303	10	48.5	25
YB0304	12	61	30
YB0305	16	72	35
YB0306	20	86	40
YB0307	24	111	50

EYE BOLT JIS1169 吊环螺母




ITEM	D(mm)	H(mm)	D2(mm)
YB0401	6	30	16
YB0402	8	39.3	20
YB0403	10	48.5	25
YB0404	12	61	30
YB0405	16	72	35
YB0406	20	86	40
YB0407	22	100	45
YB0408	24	111	50

SNAP HOOK SPRING 挂钩



ITEM	E(mm)	L(mm)	W(mm)
Y0101N	10	50	25
Y0102N	11	70	32
Y0103N	15	100	50

CASTING SPRING SNAP 挂钩

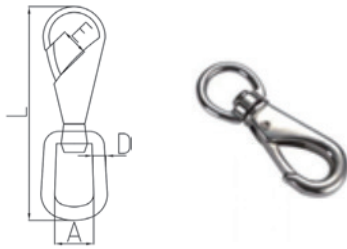


ITEM	A(inch)	L(mm)	D(inch)
Y021N	1/2	50	0.15
Y022N	5/8	83	0.18
Y023N	3/4	94	0.25
Y024N	7/8	113	0.28

FIXED SNAP SHACKLE 卸扣




ITEM	A(mm)	B(mm)	L(mm)
Y031N	12	9	52
Y032N	16	12	66
Y033N	22	16	96

SWIVEL SNAP SHACLE WITH JAW 卸扣

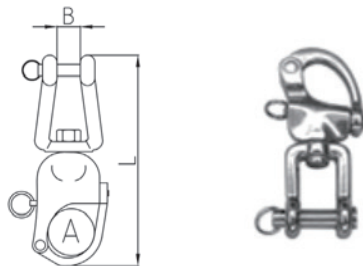

ITEM	A(mm)	L(mm)	B(mm)
Y041N	12.7	73	12.7
Y042N	15.7	89	12.7
Y043N	25.4	102	22.2

SWIVEL SNAP SHACLE WITH EYE 卸扣

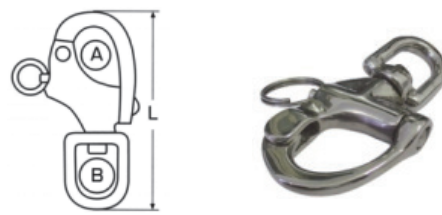

ITEM	A(mm)	B(mm)	L(mm)
Y051N	12	12	70
Y052N	16	16	87
Y053N	22	22	128

PELICAN HOOK 卸扣




ITEM	A(mm)	B(mm)	L(mm)
Y061N	13	M6	76
Y062N	16	M8	100
Y063N	24	M10	148

SNAP HOOK 挂钩




ITEM	A(mm)	B(mm)	C(mm)
Y071N	50	34	22

SHACKLE 卸扣

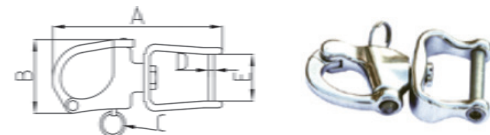

ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
Y081N	93	54	16	7.5	36

TRIGGER SNAP HOOK WITH SWIVEL EYE 挂钩

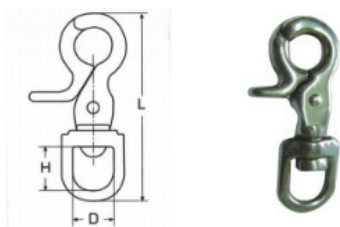


ITEM	D(mm)	H(mm)	L(mm)
YS5001	66	14	12

HOOK 挂钩




ITEM	A(mm)	B(mm)	C(mm)	D(mm)
Y091N	79	61	5	16.3

SWIVEL EYE SNAP 挂钩

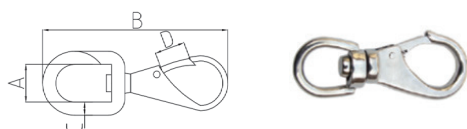


ITEM	A(inch)	B(inch)	C(inch)	D(inch)
Y911N	0.63"	3.37"	0.18"	0.43"
Y912N	0.75"	4.00"	0.25"	0.43"
Y913N	0.88"	4.62"	0.28"	0.50"

SWIVEL EYE SNAP 挂钩

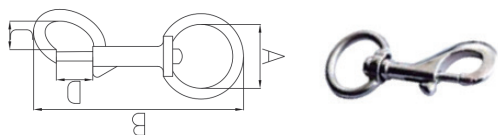


ITEM	A(inch)	B(inch)	C(inch)	D(inch)
Y921N	0.48"	2.73"	0.32"	0.28"
Y922N	0.55"	3.16"	0.38"	0.36"
Y923N	0.70"	3.68"	0.45"	0.41"
Y924N	0.79"	3.60"	0.37"	0.43"
Y925N	0.85"	3.80"	0.37"	0.43"

U-BOLT U 型栓

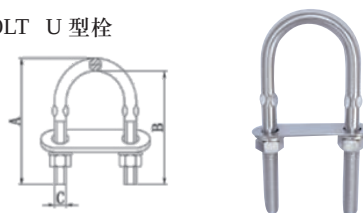


ITEM	A(mm)	B(mm)	C(mm)
Y1301U	64	60	4
Y1302U	60	55	5
Y1303U	60	54	6
Y1304U	70	64	6
Y1305U	90	84	6
Y1306U	64	56	8
Y1307U	80	72	8
Y1308U	100	92	8
Y1309U	90	80	10
Y1310U	130	120	10
Y1311U	150	138	12

U-BOLT U 型栓

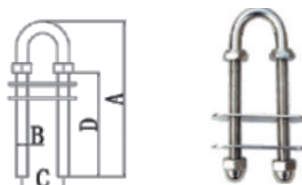

ITEM	A(mm)	B(mm)	C(mm)	D(mm)
Y1401U	130	M10	35	95

U BOLT WITH LATCH U 型栓

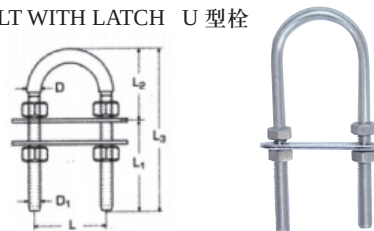


ITEM	D1(mm)	L1(mm)	L2(mm)
Y1501U	M4	30	25
Y1502U	M5	48	30
Y1503U	M6	42	35
Y1504U	M8	40	40
Y1505U	M8	52	48
Y1506U	M10	80	55
Y1507U	M12	85	65

U BOLT U 型栓



ITEM	A(mm)	B(mm)	C(mm)
Y1601U	90	M10	41

LONG U BOLT 长 U 型栓




ITEM	D(mm)	D1(mm)	H(mm)
Y1701U	8	22	155

U BOLT U 型栓



ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
Y1801U	116	89	20	17	48

SWIVEL EYE EYE 圈圈式链接转环

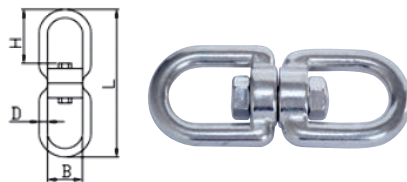


ITEM	D(mm)	B(mm)	L(mm)
YS1001	3	10	46
YS1002	4	11	51
YS1003	5	13	59
YS1004	6	14	65
YS1005	8	19	92
YS1006	10	22	117
YS1007	13	32	152
YS1008	16	38	187
YS1009	18	40	202
YS1010	20	41	216
YS1011	22	47	235
YS1012	25	64	279

SWIVEL EYE JAW 圈叉式链接转环




ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YS2001	6	12.5	10.8	65.5
YS2002	8	15.5	15.5	90.5
YS2003	10	18.8	22	115.5
YS2004	12	25	28	150
YS2005	16	31	34	184
YS2006	20	36	39	221

SWIEL JAW JAW 叉叉式链接转环

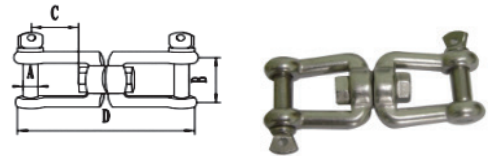

ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YS3001	6	12.5	10.8	65.5
YS3002	8	15.5	90.5	90.5
YS3003	10	18.8	115.5	115.5
YS3004	12	25	150	150
YS3005	16	31	184	184
YS3006	18	37.5	215.5	215.5

US TYPE SWIVEL 美式转环




ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YS4001	32	17.2	18.8	15.5	28
YS4002	41	20	25	18.8	34.5
YS4003	50	23.5	31	25	44
YS4004	63	33	37.5	31.25	56
YS4005	75	39	44	27.5	69
YS4006	88	44	50	44	81

TRIGGER SNAP HOOK WITH SWIVEL EYE 挂钩




ITEM	A(mm)	C(mm)
Y0101L	6	60
Y0102L	8	80

QUICK LINK 316SS 快速链接环

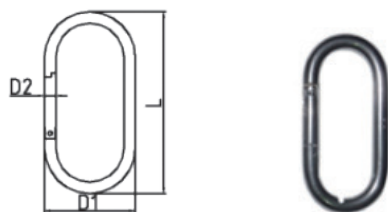


ITEM	D1(mm)	D2(mm)	L(mm)
Y0201L	26.5	6	72
Y0202L	33.5	8	90
Y0203L	40.5	10	105
Y0204L	47.5	12	122

QUICK LINK 316SS 快速链接环

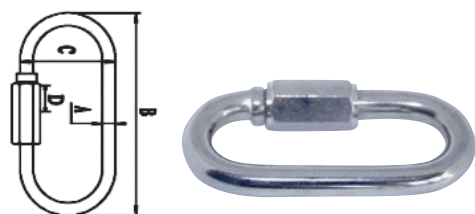

ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YS0301L	6	72	26.5	16
YS0302L	8	90	33.5	18
YS0303L	10	105	40.5	20
YS0304L	12	122	47.5	23

SPRING HOOK WITH EYELET 316SS 弹簧钩



ITEM	D(mm)	L(mm)	A(mm)	A1(mm)	E(mm)
YS301K	4	40	5	6.6	7
YS302K	5	50	6	8	8
YS303K	6	60	8	13	9
YS304K	7	70	8	10	9
YS305K	8	80	8	13	9
YS306K	10	100	10	16	12
YS307K	11	120	11	18	16
YS308K	12	140	16	21	19
YS309K	13	160	20	21	43

SPRING HOOK 弹簧钩



ITEM	D(mm)	L(mm)	A(mm)	A1(mm)	E(mm)
YS401K	4	40	5	6.6	7
YS402K	5	50	6	8	8
YS403K	6	60	8	13	9
YS404K	7	80	8	10	9
YS405K	8	100	8	13	9
YS406K	10	120	10	16	12
YS407K	11	140	11	18	16
YS408K	12	160	16	21	19

SPRING HOOK 弹簧钩



ITEM	A(mm)	B(mm)	C(mm)	D(mm)	KLL(kg)	KT(kg)
YS501K	50	6.5	7	4.8	50	0.019
YS502K	60	7.5	8	5.8	70	0.032
YS503K	70	9	8	6.8	100	0.049
YS504K	80	10	9	7.8	125	0.072
YS505K	90	11	10	8.8	140	0.099
YS506K	100	13	12	9.8	200	0.142
YS507K	120	15	16	10.8	250	0.198
YS508K	140	18	19	11.8	300	0.272
YS509K	160	20	25	12.8	350	0.381

SNAP HOOK EGG TYPE 简易弹簧钩



ITEM	A(mm)	B(mm)	C(mm)
YS601K	7	9.75	60
YS602K	11	12.5	80
YS603K	12.5	14.8	100
YS604K	15.8	21	120

AMERICAN TYPE HOSE CLAMP 美式卡箍




ITEM	A(mm)	B(mm)	C(mm)
YC101P	10-16	10	0.63
YC102P	13-19	10	0.63
YC103P	16-25	10	0.63
YC104P	18-29	10	0.63
YC105P	18-32	10	0.63
YC106P	21-38	10	0.63
YC107P	21-44	10	0.63
YC108P	37-51	10	0.63
YC109P	33-57	10	0.63
YC110P	40-64	10	0.63
YC111P	46-70	10	0.63


S HOOK S 型挂钩



ITEM	D(mm)	L(mm)	S(mm)	W(mm)
YC201P	3	25	4	9
YC202P	4	32	6	12
YC203P	5	36	7	15
YC204P	6	45	8	16
YC205P	8	65	12	23

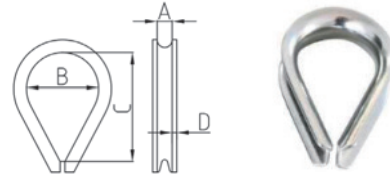
WIRE ROPE EXYRA HEAVY DUTY U.S. TYPE
重型美式套环

ITEM	Size(inch)	A(inch)	B(inch)	C(inch)	D(inch)
Y7000T	3/16"	0.21"	0.75"	1.37"	0.06"
Y7001T	1/4"	0.28"	0.87"	1.62"	0.07"
Y7002T	5/16"	0.34"	1.06"	1.87"	0.08"
Y7003T	3/8"	0.43"	1.12"	2.00"	0.11"
Y7004T	7/16"	0.47"	1.25"	2.38"	0.12"
Y7005T	1/2"	0.56"	1.50"	2.50"	0.15"
Y7006T	9/16"	0.59"	1.50"	2.50"	0.15"
Y7007T	5/8"	0.68"	1.75"	3.00"	0.18"
Y7008T	3/4"	0.81"	2.00"	3.75"	0.22"
Y7009T	7/8"	0.93"	2.25"	4.00"	0.22"
Y7010T	1"	1.12"	2.50"	4.37"	0.25"

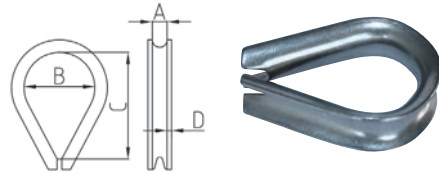WIRE ROPE THIMBLE COMMERCIAL U.S. TYPE
美式套环


ITEM	Size(inch)	A(inch)	B(inch)	C(inch)	D(inch)
Y8000T	1/8"	0.16"	0.69"	1.31"	0.05"
Y8001T	3/16"	0.22"	0.69"	1.31"	0.05"
Y8002T	1/4"	0.28"	0.69"	1.31"	0.05"
Y8003T	5/16"	0.34"	0.81"	1.50"	0.05"
Y8004T	3/8"	0.41"	0.94"	1.63"	0.06"
Y8005T	1/2"	0.53"	1.13"	1.88"	0.08"
Y8006T	5/8"	0.66"	1.38"	2.25"	0.13"
Y8007T	3/4"	0.78"	1.63"	2.50"	0.14"
Y8008T	7/8"	0.94"	1.88"	3.50"	0.16"
Y8009T	1"	1.06"	2.50"	4.25"	0.16"
Y8010T	1 1/8"	1.32"	2.75"	4.50"	0.22"

WIRE ROPE THIMBLE COMMERCIAL EUROPEAN
欧式套环

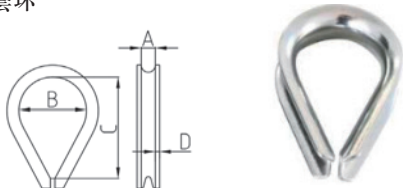


ITEM	Size(mm)	A(mm)	B(mm)	C(mm)	D(mm)
Y9000T	2	2	8	14	1.00
Y9001T	3	3	10	16	1.00
Y9002T	4	4	11	19	1.00
Y9003T	5	5.6	13.5	23.5	1.00
Y9004T	6	6.6	15	25	1.25
Y9005T	7	7.8	16	28	1.25
Y9006T	8	9	18	32	1.50
Y9007T	10	11	23	37	1.50
Y9008T	12	14	27	44	2.00
Y9009T	14	15	34	55	2.50
Y9010T	16	17	35	63	2.50
Y9011T	18	19	40	69	3.00
Y9012T	20	22	46	76.6	4.00

WIRE ROPE THIMBLE COMMERCIAL ITALIAN
意式套环

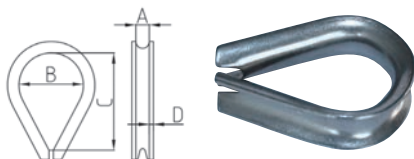


ITEM	Size(mm)	A(mm)	B(mm)	C(mm)	D(mm)
Y10000T	2	2	7	10	1.00
Y10001T	2.5	2.5	8	14	1.00
Y10002T	3	3	10	17	1.00
Y10003T	4	4	11	18	1.00
Y10004T	5	5.6	13	20	1.20
Y10005T	6	6.5	15	25	1.20
Y10006T	8	9	18	33	1.50
Y10007T	10	11	23	41	2.00
Y10008T	12	14	27	48	2.00
Y10009T	14	15	34	53	2.50
Y10010T	16	17	36	57	3.00
Y10011T	18	19	40	67	3.00
Y10012T	20	22	45	75	4.00
Y10013T	22	24	52	84	4.00
Y10014T	24	26	56	96	5.00
Y10015T	28	30	65	115	6.00

EYE BOLT 吊环螺丝

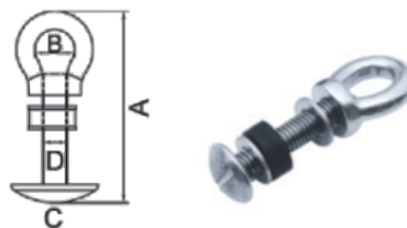


ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YB0501	62	13.5	ø6	M8

EYE BOLT 吊环螺丝



ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YB0601	62	13.5	ø6	M8


BOLT BOW SHACKLE 弓型卸扣

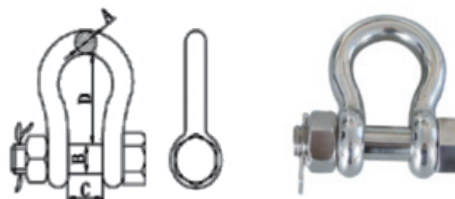

ITEM	A(inch)	B(inch)	C(inch)	D(inch)
YD1401	3/16"	1/4"	0.38"	0.88"
YD1402	1/4"	5/16"	0.47"	1.13"
YD1403	5/16"	3/8"	0.53"	1.22"
YD1404	3/8"	7/16"	0.66"	1.44"
YD1405	7/16"	1/2"	0.75"	1.69"
YD1406	1/2"	5/8"	0.81"	1.88"
YD1407	5/8"	3/4"	1.06"	2.38"
YD1408	3/4"	7/8"	1.25"	2.81"
YD1409	7/8"	1"	1.44"	3.31"
YD1410	1"	1-1/8"	1.69"	3.75"

EUROPEAN COMMERCIAL TWISTED SHACKLE

扭体卸扣




ITEM	A(mm)	D1(mm)	D2(mm)	L(mm)
YD1501	8	4	3	26
YD1502	11	5	4	37
YD1503	13	6	5	42
YD1504	16	8	7	56
YD1505	20	10	9	70
YD1506	26	12	11	85

BOW SHACKLE 弓型卸扣



ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YD1601	4	4	8	14
YD1602	5	5	10	18
YD1603	6	6	13	25
YD1604	8	8	16	32
YD1605	10	10	19	38
YD1607	12	12	25	51
YD1608	16	16	32	64
YD1609	19	19	38	76


LONG D SHACKLE 长 D 型卸扣



ITEM	A(mm)	D(mm)	L(mm)
YD1701	9	4	30
YD1702	12	5	38
YD1703	13	6	44
YD1704	17	8	58
YD1705	22	10	73
YD1706	25	12	79
YD1707	29	14	104
YD1708	35	16	150

D SHACLE

D 型卸扣




ITEM	A(mm)	D(mm)	L(mm)
YD1801	9	4	16
YD1802	12	5	18
YD1803	13	6	22
YD1804	17	8	28
YD1805	22	10	35
YD1806	28	12	60
YD1807	29	14	60
YD1808	32	16	67
YD1809	37	18	75
YD1810	40	20	77

US TYPE

D SHACKLE


美式 D 型卸扣

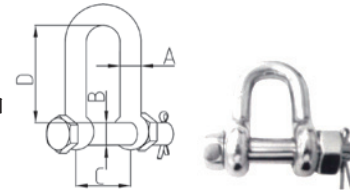

ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YD1901	5	6	10	19
YD1902	6	8	12	22
YD903	8	10	14	26
YD1904	10	11	17	32
YD1905	11	12	19	37
YD1906	12	16	20	41

D RING

D 型环



ITEM	A(mm)	B(mm)	C(mm)
YD061R	3	18	25
YD062R	4	17	25
YD063R	4	25	30
YD064R	4.5	30	31
YD065R	5	33.5	50
YD066R	5	12	34
YD067R	5	12	34
YD068R	8	45	47.5


D RING

D 型环




ITEM	A(mm)	B(mm)	C(mm)
YD071R	60	7	52
YD072R	40	6	33
YD073R	30	4	29

WELD D RING 焊接 D 型环

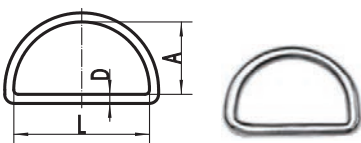


ITEM	A(mm)	D(mm)	L(mm)
YD081R	3	18	25
YD082R	4	17	25
YD083R	4	25	30
YD084R	4.5	30	31
YD085R	5	33.5	50
YD086R	5	12	34
YD087R	5	12	34
YD088R	8	45	47.5

Dee Ring D 型环

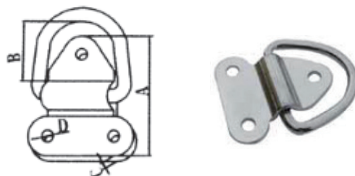


ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YD091R	57	30	5	Ø5.8

Dee Ring D 型环

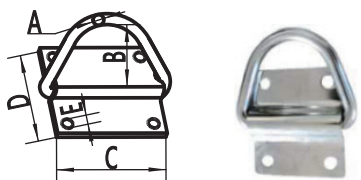


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YS100R	6	33	52	48	5.2

Triangle Ring 三角环

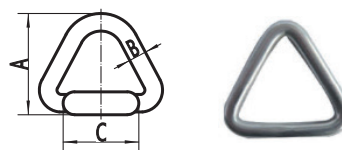

A	L1(mm)	L2(mm)
YD071R	30	30
YD072R	50	50
YD073R	50	50


C RING C 型环

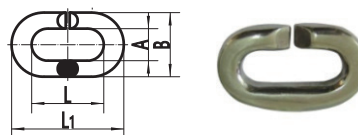

ITEM	A(mm)	B(mm)	L(mm)	L1(mm)
YD2101	8	17.5	20	30
YD2102	9	21	36	36
YD2103	12	28	48	48
YD2104	15	35	60	60
YD2105	20	46	78	78
YD2106	24	56	96	96


ROUND RING

圆环




Item	A(mm)	L(mm)
YD2110	3	25
YD2111	4	25
YD2112	4	30
YD2113	4	30
YD2114	5	30
YD2115	5	40
YD2116	5	50
YD2117	6	30
YD2118	6	40
YD2119	6	50
YD2120	6	60
YD2121	7	35
YD2122	8	40
YD2123	8	50

CONNECTION CHAIN LINL 链卡

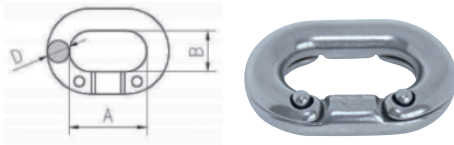


ITEM	A(mm)	B(mm)	D(mm)
YD2201	17.5	8.6	5
YD2202	21	11	6
YD2203	24	11.8	8
YD2204	30.5	14.5	10
YD2205	33	17	11
YD2206	42	5619	13
YD2207	47.3	24	16
YD2208	51.5	28	19
YD2209	60	32	22
YD2210	66	25	25

DOUBLE HOOK 双头钩




ITEM	C(mm)	L(mm)
YD2301	7.5	65
YD2302	8.5	76
YD2303	9.5	90
YD2304	9.5	100
YD2305	12.00	118

SINGLE HOOK 单头钩




ITEM	A(mm)	D(mm)	C(mm)
YD2401	10	53	7
YD2402	12	67	7
YD2403	12	76	8
YD2404	16	82	10
YD2405	19	91	10
YD2406	25	94	10
YD2407	28	107	12
YD2408	32	113	12

SWIVEL SNAP HOOK 万向钩

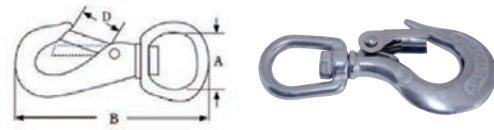

ITEM	A(mm)	B(mm)	D(mm)
YD2501	17.70	69	10
YD2502	21.00	85	13
YD2503	20.90	99	15.5
YD2504	20.80	117.5	20.5

TURNBUCKLE,TYPE HOOK -EYE 开体花篮




ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
Y100T	5	90	172	10	9
Y101T	6	100	190	11	10
Y102T	8	115	216	12.7	11
Y103T	10	152	273	13	13
Y104T	12	152	305	18	16
Y105T	14	152	327	20	16
Y106T	16	152	342	22	16
Y107T	18	152	369	23.5	20
Y108T	20	152	394	25	24

TURNBUCKLE,TYPE HOOK-HOOK 开体花篮



ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
Y200T	5	90	172	9	9
Y201T	6	100	190	10	10
Y202T	8	114	216	12	11
Y203T	10	152	273	13	13
Y204T	12	152	305	16	16

TURNBUCKLE TYPE EYE-EYE 开体花篮

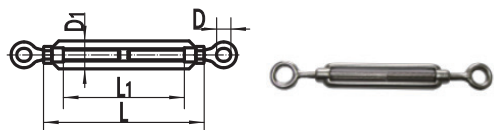


ITEM	D1(mm)	D(mm)	L(mm)	L1(mm)
Y300T	5	8	70	54
Y301T	6	100	68	65
Y302T	8	13	120	120
Y303T	10	16	150	94
Y304T	12	18	195	165

TURNBUCKLE OPEN BODY JAW-JAW 开体花篮



ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
Y400T	5	130	180	4.5	3
Y401T	6	140	190	5.5	4
Y402T	8	150	210	6.5	5
Y403T	10	180	250	8.5	6
Y404T	12	215	295	10.5	8
Y405T	14	240	330	12	10
Y406T	16	270	370	14	12
Y407T	20	295	410	16	14


TURNBUCKLE WELDED CLOSED BODY JAW-JAW
封闭式开体花篮



ITEM	D(mm)	A(mm)	H(mm)	L1(mm)
Y500T	5	6.5	10	195
Y501T	6	7.5	10	230
Y502T	8	11	11	255
Y503T	9	12	14	300
Y504T	12	14	20	380
Y505T	12	15	22	415
Y506T	16	17	26	480
Y507T	19	20	30	520

TURNBUCKLE TERMINAL JAW/WIRE ROPE

封闭式叉杆花篮



ITEM	A(mm)	L1(mm)	L2(mm)	D(mm)
Y600T	5	80	155	6.5
Y601T	6	95	175	7.5
Y602T	8	105	205	11
Y603T	10	125	230	12
Y604T	12	150	285	15

RIGGING SCREW JAW/JAW 开体花篮




ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
Y610T	160-252	36.6	15.5	9	13.5

TURNBUCKLE DIN1480 Eye/Eye 开体花篮




ITEM	A(inch)	B(inch)	C(inch)	D(inch)
Y620T	1/4"	4"	7.50"	0.45"
Y621T	5/16"	4.5"	8.50"	0.50"
Y622T	3/8"	6"	10.75"	0.51"
Y623T	1/2"	6"	12.00"	0.71"
Y624T	5/8"	6"	13.50"	0.87"
Y625T	3/4"	6"	13.50"	0.98"
Y626T	1"	6"	19.00"	1.35"
Y627T	1"	12"	24.00"	1.35"
Y628T	1-1/4"	12"	24.00"	1.75"

TURNBUCKLE U.S. TYPE 美式叉开体花篮




ITEM	A(inch)	B(inch)	C(inch)	D(inch)	E(inch)
Y630T	1/4"	4"	7.5"	0.20"	0.45"
Y631T	5/16"	4.5"	8.5"	0.25"	0.51"
Y632T	3/8"	6"	10.75"	0.30"	0.54"
Y633T	1/2"	6"	12"	0.37"	0.63"
Y634T	5/8"	6"	13.50"	0.50"	0.82"
Y635T	3/4"	6"	15.50"	0.62"	1.03"
Y636T	1"	6"	19"	0.75"	1.23"
Y637T	1"	12"	24"	0.75"	1.23"
Y638T	1-1/4"	12"	24"	1.00"	1.80"

TURNBUCKLE U.S. TYPE 美式圈叉开体花篮



ITEM	A(inch)	B(inch)	C(inch)	D(inch)	E(inch)
Y640T	1/4"	4"	7.50"	0.45"	0.45"
Y641T	5/16"	4.5"	8.50"	0.50"	0.51"
Y642T	3/8"	6"	10.75"	0.51"	0.54"
Y643T	1/2"	6"	12.00"	0.71"	0.63"
Y644T	5/8"	6"	13.50"	0.87"	0.82"
Y645T	3/4"	6"	15.50"	0.98"	1.03"
Y646T	1"	6"	19.00"	1.35"	1.23"
Y647T	1"	12"	24.00"	1.35"	1.23"
Y648T	1-1/4"	12"	24.00"	1.75"	1.80"

TURNBUCKLE U.S. TYPE 美式封闭叉叉花兰

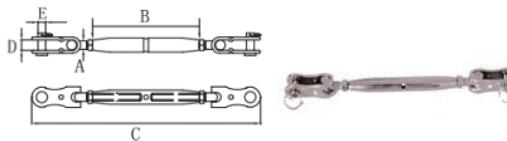


ITEM	A(inch)	B(inch)	C(inch)	D(inch)	E(inch)
Y650T	3/16"	3.16"	5.20"	0.25"	0.20"
Y651T	1/4"	3.72"	6.50"	0.32"	0.24"
Y652T	5/16"	4.20"	8.00"	0.47"	0.31"
Y653T	3/8"	4.87"	9.50"	0.51"	0.35"
Y654T	1/2"	5.75"	10.50"	0.53"	0.47"

WIRE CONNECTION 栏杆绳接头



ITEM	A(inch)	B(inch)	C(inch)	D(inch)
Y660T	1/16"	0.28"	0.20"	2.28"
Y661T	3/32"	0.28"	0.20"	2.28"
Y662T	1/8"	0.28"	0.20"	2.56"
Y663T	5/32"	0.35"	0.24"	2.87"
Y664T	3/16"	0.43"	0.32"	3.30"
Y665T	7/32"	0.47"	0.37"	3.74"
Y666T	1/4"	0.51"	0.43"	4.17"
Y667T	9/32"	0.55"	0.47"	4.60"
Y668T	5/16"	0.55"	0.47"	5.12"
Y669T	3/8"	0.71"	0.55"	5.94"

WIRE ROPE SWAGE STUD WITH NUT 接线器




ITEM	A(mm)	B(mm)	C(mm)	D(mm)
Y701T	Φ3	7	5	65
Y702T	Φ4	9	6	73
Y703T	Φ5	11	8	84

TURNBUCKLE BODY 丝套




ITEM	D1(mm)	D2(mm)	L(mm)
Y800T	6	11	95
Y801T	8	13	105
Y802T	10	17	125
Y803T	12	21	150
Y804T	14	21	165

WAGE STUD WITH NUT 接线器




ITEM	A(mm)	B(mm)	C(mm)
Y8981	8	5	90
Y8982	10	6	110
Y8983	12	8	126

SWAGE STUD 接线器




ITEM	A(mm)	B(mm)
YDG101	86	M5
YDG102	100	M6
YDG103	117	M8
YDG104	130	M10
YDG105	162	M12
YDG106	180	M14
YDG107	195	M16
YDG108	230	M18

SWAGE EYE 接线器



ITEM	A(mm)
YDG401	2.5
YDG402	3
YDG403	4
YDG404	5
YDG405	6
YDG406	7
YDG407	8
YDG408	10


EYE SCREW 连接螺丝



ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YDG501	2.5	3	5.6	49
YDG502	3	5.3	6.4	64
YDG503	4	6.4	8	73
YDG504	5	6	10	85
YDG505	6	9	12.7	100
YDG507	8	12.7	16	120
YDG508	10	16	18	146


REMOVABLE PIN WITH RING AND STRING

带钢丝绳销子




ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YDG601	38.1	6.35	25.4	127	1.3

SIMPLEX WIRE ROPE CLAMP 卡座



ITEM	D1(mm)	B(mm)	H(mm)	L(mm)
YS101X	M4	12	14	15
YS102X	M4	14	14	18
YS103X	M5	18	17	20
YS104X	M5	20	17	25
YS105X	M6	24	23	30
YS106X	M7	27	25	33
YS107X	M8	30	27	36
YS108X	M10	35	32	45

DUPLEX WIRE ROPE CLAMP 卡座




ITEM	D(mm)	B(mm)	H(mm)	L(mm)
YS201X	M4	12	14	30
YS202X	M4	14	14	36
YS203X	M5	18	17	40
YS204X	M5	20	17	50
YS205X	M6	24	23	60
YS206X	M7	27	25	66
YS207X	M8	30	27	72
YS208X	M10	35	32	90

U.S WIRE ROPE CLIP 日式卡头




ITEM	WIRE	A(mm)	D1(mm)	L(mm)
YS301X	1/2"	60	12.7	25.4
YS302X	5/8"	64	14.2	32
YS303X	3/4"	72	15.8	37
YS304X	1"	88	19	46

WIRE ROPE CLIP DIN741 卡头



ITEM	ROPE(mm)	A(mm)	D1(mm)	L(mm)	H(mm)
YS401X	4	22	M4	12	10
YS402X	5	23	M5	13	10
YS403X	6	26	M5	15	11
YS404X	8	30	M6	19	15
YS405X	10	34	M8	22	17
YS406X	12	40	M10	30	21
YS407X	16	50	M12	33	26
YS408X	19	54	M12	38	30
YS409X	22	61	M14	44	34
YS410X	25	65	M14	45	37


TWIN SWIVEL BLOCK 柔型双滑轮

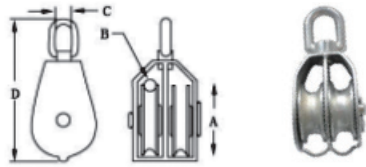

ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YB601K	25	12	15	80
YB602K	32	12	15	93
YB603K	50	14	20	127


SINGLE SWIVEL PULLEY WITH RING

带半圆环单滑轮

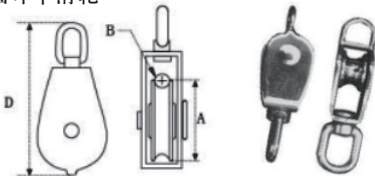

ITEM	A(mm)	B(mm)	D(mm)	WI(mm)
YB301K	15	11	60	0.035
YB302K	20	13	73	0.075
YB303K	25	15	85	0.150
YB304K	32	15	95	0.250
YB305K	50	20	127	0.400


US TYPE WIRE ROPE CLIPS 美式模锻卡头

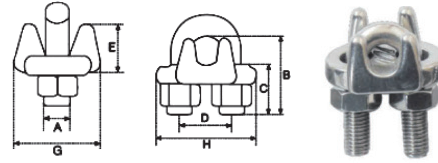

ITEM	A	B	C	D	E	G	H
YS501X	3/16	18	11	12	10	20	23
YS502X	1/4	24	14	15	12	23	29
YS503X	5/16	26	15	19	16	30	36
YS504X	3/8	35	19	22	18	33	43
YS505X	7/16	38	19	25	23	41	49
YS506X	1/2	47	25	30	26	46	58
YS507X	1/2	47	25	30	28	48	58
YS508X	9/16	57	32	33	31	52	63
YS509X	9/16	60	32	33	34	52	63
YS510X	5/8	70	36	38	35	57	72
YS511X	3/4	79	41	44	40	62	80
YS512X	3/4	89	46	47	45	66	88
YS513X	3/4	98	51	51	48	71	91
YS514X	7/8	108	54	59	56	80	105
YS515X	7/8	118	59	60	59	80	106
YS516X	7/8	125	60	66	62	87	113
YS517X	1	135	60	70	68	92	121
YS518X	1-1/8	149	70	78	73	95	133
YS519X	1-1/4	165	76	84	86	113	148
YS520X	1-1/4	181	84	98	97	114	160
YS521X	1-1/4	197	86	105	108	114	164
YS522X	1-1/4	211	89	111	127	127	171
YS523X	1-1/2	233	98	121	133	175	192


DOUBLE SWIVEL PULLEY WITH RING

带圆环双滑轮




ITEM	A(mm)	B(mm)	L(mm)	WI(mm)
YB401K	25	14.5	101	0.350
YB402K	32	14.5	113	0.375
YB403K	50	20.5	148	0.625

E CLEAT 滑轮导绳器

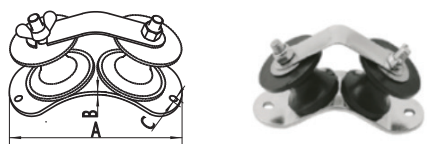


ITEM	A(mm)	B(mm)	C(mm)
YB501K	158	4	10

SWIVEL BLOCK WITH DOUBLEPULLEY 双滑轮

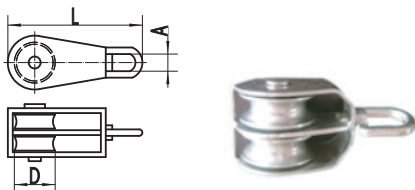


ITEM	A(mm)	L(mm)	D(mm)
YB001K	15	83	25.4
YB002K	16	98	32
YB003K	21	127	51

PULLEY 犁形单滑轮

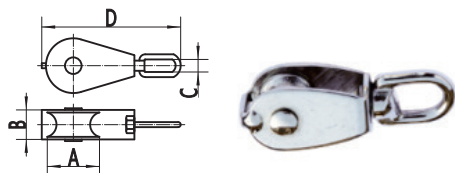


ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YB101K	25.4	6.	15	71
YB102K	32	8	16	96
YB103K	51	10	21	127

FLAT SWIVEL EYE PULLEY 方形单滑轮

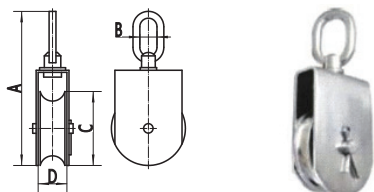


ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YB201K	127	21	51	10
YB202K	171	25	76	12
YB203K	203	25	100	16

SHOULDER EYE BOLT 吊环螺母




ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YD401B	150	112	M20	Φ8	22

LIFE SAVING RING 救生环

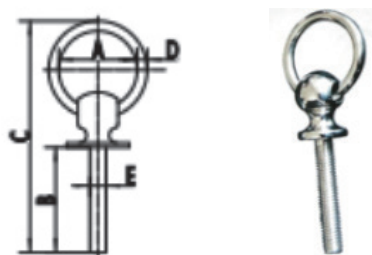


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YD501B	30	41.5	95	5	M8
YD502B	35	40.5	102	5	M8

DOCK RING(CARBON STEEL) 码头环

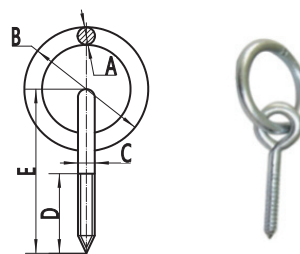


ITEM	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
YD601B	8	64	7.5	43	90

US TYPE SHOULDER BOLT 吊环螺母




ITEM	A(mm)	B(mm)	C(mm)	D(mm)
YD701B	0.25"	1.5"	2.00"	0.50"
YD702B	0.25"	2.25"	4.00"	0.50"
YD703B	0.31"	1.50"	2.25"	0.62"
YD704B	0.31"	2.50"	4.50"	0.62"
YD705B	0.38"	1.25"	2.50"	0.75"
YD706B	0.38"	2.25"	4.50"	0.75"
YD707B	0.50"	1.50"	3.25"	1.00"
YD708B	0.50"	3.00"	6.00"	1.00"
YD709B	0.63"	2.00"	4.00"	1.25"
YD710B	0.63"	3.00"	6.00"	1.25"
YD711B	0.75"	2.00"	4.50"	1.50"
YD712B	0.75"	3.00"	6.00"	1.50"
YD713B	0.88"	2.50"	5.00"	1.75"

EYE BOLT WITH RING AND NUT 吊环螺丝

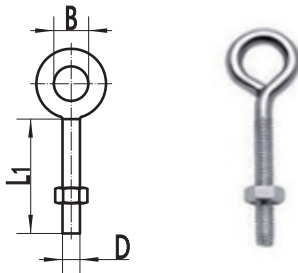

ITEM	D(mm)	L1(mm)	D(mm)
YD801B	4	35	8
YD802B	5	26	10
YD803B	5	38	10
YD804B	6	32	13
YD805B	6	64	13
YD806B	8	38	16
YD807B	10	38	19
YD808B	10	76	19
YD809B	15	102	25

WELD EYE BOLT WITH RING AND NUT 吊环螺丝

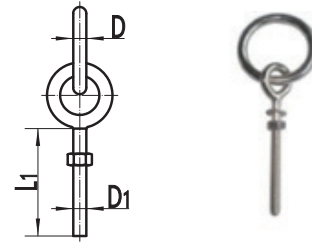

ITEM	L1(mm)	D(mm)	D1(mm)
B4401	35	4	4
B4402	41	5	5
B4403	52	6	6
B4404	63	8	8
B4405	72	10	10
B4406	95	12	12
B4407	125	15	15
YD708B	0.50"	3.00"	1.00"
YD709B	0.63"	2.00"	1.25"
YD710B	0.63"	3.00"	1.25"
YD711B	0.75"	2.00"	1.50"
YD712B	0.75"	3.00"	1.50"
YD713B	0.88"	2.50"	1.75"

SOLAR PANEL 太阳能板



ITEM	Specification
YD-5M	5 Watts Ref
YD-20M	5 Watts Ref
YD-50M	50 Watts Ref
YD-105M	105 Watts Ref
YD-195M	195 Watts Ref
YD-245M	245 Watts Ref

Windlass selection guide (windlass, anchor, bow roller, anchor chain)

选型指导 (锚机, 锚, 锚支架, 锚链)

Anchor Weight 锚重	5-10kg	9-15kg	15-25kg	25-50kg	30-60kg	50-80kg	70-150kg	100-250kg
Windlass 锚机	6mm	6-8mm	8mm	10mm	12mm	12.5mm	12.5-14mm	14-16mm
Bow Roller 锚支架	Y02	90103	90103					
	90102	Y03	Y03	90104		YD9000A		
	YD15	YD18	YD25	Y04	90105	90109C	YD9000B	YD9000B
	YD16	90109A	90109B	90107	Y05	YD120	90109C	90109C
Windlass 锚机	YD411	YD511	YD611	YD711	YD1011		YDG-12.5	YDG-14
	YD411H	YD511H	YD611H	YD711H	YD1011H	YDG-12.5	YDG-14	YDG-16
Anchor Connector 锚连接器	YD904A	YD904B						
	YD902A	YD905B	YD904B	YD902B				
	YD901A	YD902A	YD905B	YD903B	YD904C	YD904C		



WE BEAT WITH BEST FOR YOU

Concentration creates fame



CERTIFICATE

CERTIFICATE



new YOUNG-STAR

www.yd-metal.com 86-546-8618928



HAIPU MARINE EQUIPMENT CO.,LTD / NEW YOUNG-STAR METAL CO.,LTD

Add: Niuzhuang Industrial Zone, Dongying, Shandong , China

TEL:086-546-8618928

FAX: 086-546-8616758

Http:www.yd-metal.com

E-mail: sales@yd-metal.com

Zip code:257000