


ELECTRIC ACCESSORIES 电 控 配 件

NYS CONTROL PANNEL

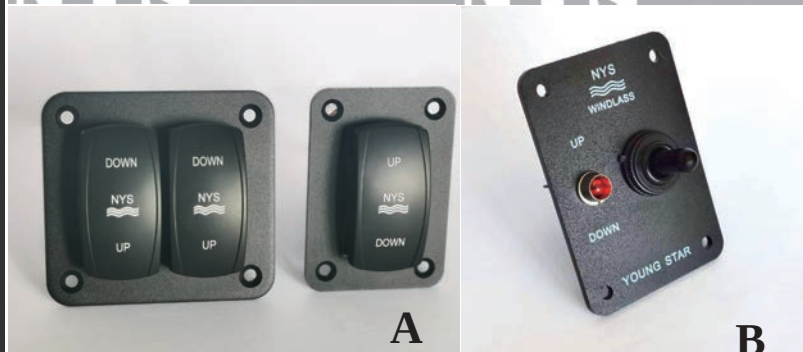

Easy to use, panel- mounted Up/ Down switch for windass & winch operation, A type and B type option. Suitable for 12V/24V DC use.

使用简单，面板安装方式，A 和 B,2 种类型供您选择，适用于直流 12V/24 设备

NYS HAND SWITCH



An easily installed watertight handheld control. Completely maintenance free with one meter cable.

安装简单，防水手动开关，带 1 米线缆

NYS FOOT SWITCH



Perfect watertight and simple operation by your foot. UP & DOWN switch with a safety cover to prevent accidental push button operation. Control bottom made by sea water resistant rubber. Available in white and black.

水密，可以简单用脚轻轻踩踏来操作锚机 或者绞车正反转。操作按钮有保护盖，可以防止错误操作。操作按钮由海水防腐的橡胶制造。开关有黑色和白色可供选择

NYS

SOLENOID



Solenoid is control device for DC 12V/24V motor, and can be used along with switches.

换向器适用于 12V/24V 直流电机，一般配合开关使用来控制锚机 / 绞车电机正反转

NYS

Remote Control



Remote control have two types, wired and wireless. With a wireless remote control installed, you will have full control of windlass anywhere on deck. The control consists of a transmitter and a receiver.

遥控开关有无线也有线两种，无限遥控器可以在甲板任何位置自由控制锚机，遥控器包含一个发送器一个信号接收器

NYS

Circuit Breaker




Protects the electric motor from overcharge and short circuit. It's available in different version, 50A, 80A, 100A, 120A, 150A, power supply DC 12V/24V

断路器可以在超载或者是短路的情况下断开电路，保护电机不被烧坏。有多个不同型号可供选择，从 50A 到 150A，适用于直流 12V/24V 电机。

NYS

Remote Control

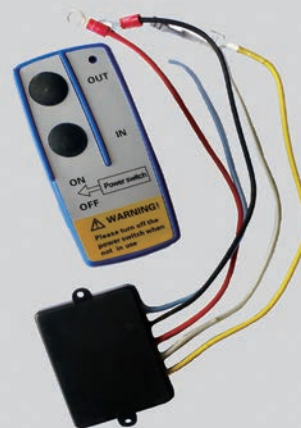

With a wireless remote control, you will have full control of windlass anywhere on deck. The control consists of a transmitter and a receiver.

遥控开关有无线也有线两种，无限遥控器可以在甲板任何位置自由控制锚机，遥控器包含一个发送器一个信号接收器

NYS

Control Box & Master Controller



This marine control box can control the starting braking, running, back running, change speed and protection of three-phase pole-change multi-speed motors for driving machines, such as windlasses, warping capstan and mooring winches with the cooperation of the marine master controller. The rated voltage of the Control Box & master controller is 380V or 440V. The protection grade is IP56.

Application:

1. Temperatures: -25°C — $+45^{\circ}\text{C}$
2. There are dewdrops alt-dog and oil fog
3. There are shck and vibration periodical vibration: ± 22.5 transverse slope: ± 22.5

该系列船用控制箱与以下船用主令控制器配合使用于控起锚机或起锚绞盘，系泊绞车等交流变极变速异步电机的启动，制动，正反转变速的同时保护电机。

该系列电控箱以及主令控制器适用于 380V/50HZ, 440V/60HZ 两种电制，防护等级 IP56

应用范围：

1. 环境温度： -25°C — $+45^{\circ}\text{C}$
2. 海上潮湿空气，油雾，盐雾
3. 承受船舶营运时的振动和冲击，倾斜摇摆均不大于 22.5



NYS

Control Switch



Application 应用范围：

1. Temperatures: -25°C — $+45^{\circ}\text{C}$
2. There are dewdrops alt-dog and oil fog
3. There are shck and vibration periodical vibration: ± 22.5 transverse slope: ± 22.5

The rated voltage of the Control switch is 380V or 440V. The protection grade is IP56.

1. 环境温度 - 25°C — $+45^{\circ}\text{C}$
 2. 海上潮湿空气，油雾，盐雾
 3. 承受船舶营运时的振动和冲击，倾斜摇摆均不大于 22.5
- 该系列手持按钮盒适用于 380V/50HZ, 440V/60HZ 两种电制，防护等级 IP56