


小型不锈钢电动绞车 Stainless Steel Electric Winch



我们根据客户的要求定做各种绞车，根据客户需求设计独一无二的解决方案。

NYS is flexible to modify design according to customer needs or produce an unique solution.

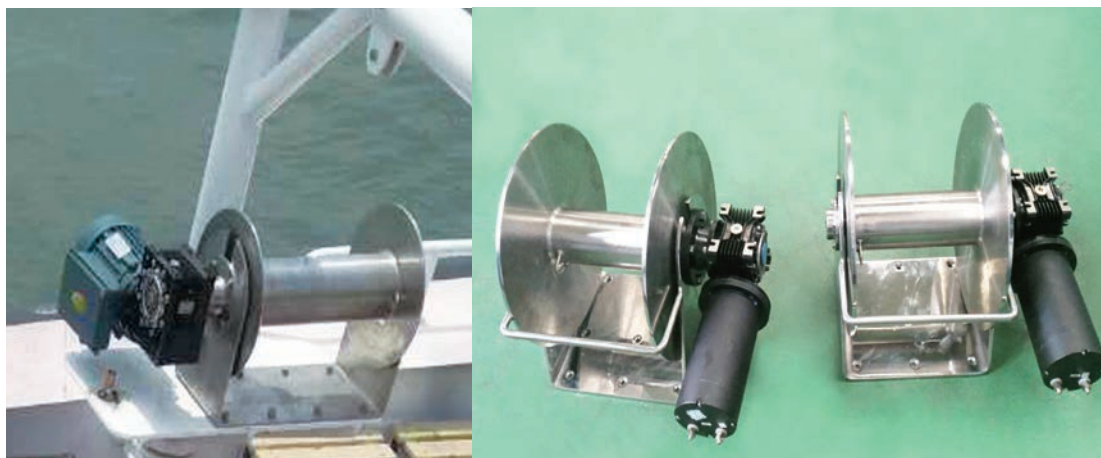

- DC 12V/24V electric motor drive.
- AC electric motor drive.
- Stainless steel 316 warping drum
- 直流 12V 或者 24V 电机驱动
- 交流电机驱动
- 316 不锈钢卷筒

HM Capstan 绞盘




Features 特点

- The HM Capstan is equipped with epicyclical gearbox, higher efficiency.
- All the outside parts of the capstan is stainless steel, fully waterproof and rustproof
- 该型号的绞盘配置的是行星轮减速机，所以更高效
- 所有外置的部件都是不锈钢材质，防水防锈

Specification 规格型号

型号 Model	净重 Net.Weight	电源供应 Power Supply	电机 Motor (W)	工作电流 AMPS@Working Load	工作负载 Working Load(kg)	最大拉力 Max.Pull(kg)	速度 Line Speed	锚绳尺寸 Rope Size
HM600	10kg	12V/24V	600W	60A/40A	90kg	180kg	16m/min	6-10mm
HM1000	14kg	12V/24V	1000W	115A/60A	100kg	230g	20m/min	8-10mm

Dimension 尺寸图


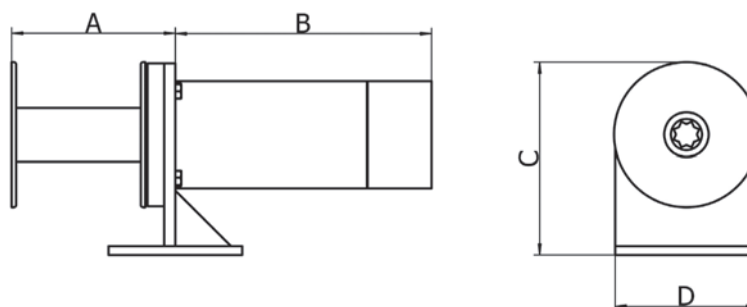


型号 MODEL	A(mm)	B(mm)	C(mm)	D(mm)
HM600	147	230	173	128
HM1000	210	270	210	128

Drum Winch 电动绞车

- Perfect Anchoring System for Fishing Boat
- Heavy Duty Motor, High speed, Silent Operation With Bearing
- Constructed from 316 marine grade stainless steel
- Simply drive the boat to where you want to fish, push a button and the anchor is I
- You can lower and retrieve your anchor rope using our winches at a rate between
- The NYS drum winch is available in a range of capacities, and there's one design
- 此系列绞车是渔船锚泊系统的绝佳选择。
- 重型电机，高速，低噪音运行
- 材质是标准船用 316 不锈钢
- 安装该系列绞车，可以去任何您想去的地方捕鱼，只需要按下按钮，船锚
- 该系列绞车会以 80-90 英尺每分钟的速度收放船锚
- NYS 绞车有多种型号供您选择，每一种的容绳量都不同，总会有一种适合您的船

Standard Drum Winch 标准绞盘

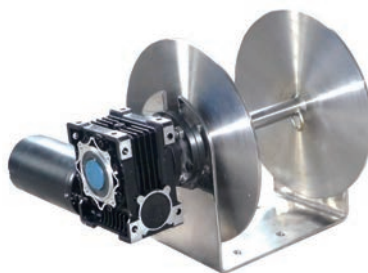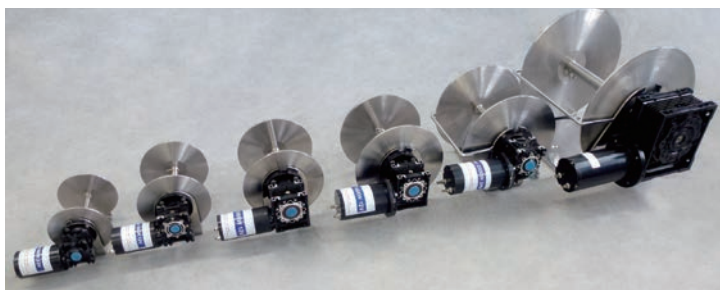


Features 特点

- The fully sealed gearbox is driven by a vertically mounted, permanent magnet motor
- Gearbox housings are marine grade alloy and drum is Stainless steel
- The speed of retrieval increases with each revolution.
- The rope and chain does not twist and tangle causing the unit to malfunction.
- The motor can be mounted at 30, 45 and 90 degrees to suit the configuration of the anchor well
- To protect the motor, the circuit breaker will trip out if there is a power overload (for example if the anchor is stuck on the bottom).
- Easily disassembled for servicing
- Fit include hand-switch and solenoid, circuit breaker
- 全封闭减速箱，立式安装，稀土电机
- 减速箱外壳材质是船用铝合金，此外卷筒标准不锈钢材质
- 设备出现故障时，绳子和链子也不会缠绕在一起或者打结
- 电机可以与水平面成 30 度，45 度或者 90 度安装，来适应不同的锚
- 如果电机过度负载（比如锚被卡在河床底部），继电器会断开来保护电机
- 拆装简单便于检修维护
- 配手动开关，换向器，断路开关

Specification 规格型号

型号 Model	净重 Weight	供电电源 Power Supply	电机 Motor	工作电流 AMPS@ Working Load	工作负载 Working Load	最大拉力 Max. Pull	建议容量 Suggested Rope length	建议锚链长度 Suggest Chain Size & length
YDW-010	11kg	12V/24V	400W	50A/30A	70kg	320kg	6mm*70m	6mm*3m
YDW-011	16kg	12V/24V	600W	70A/40A	90kg	510kg	6mm*100m	6mm*3m
YDW-012	24kg	12V/24V	1000W	100A/60A	120kg	750kg	8mm*105m	8mm*3m
YDW-013	30.5kg	12V/24V	1400W	125A/70A	145kg	900kg	8mm*170m	8mm*3m
YDW-014	42kg	12V/24V	1600W	150A/80A	170kg	980kg	10mm*260m	10mm*3m
YDW-015	115kg	24V/48V	2500W	160A/80A	210kg	1600kg	14mm*400m	12mm*3m



Dimension 尺寸图

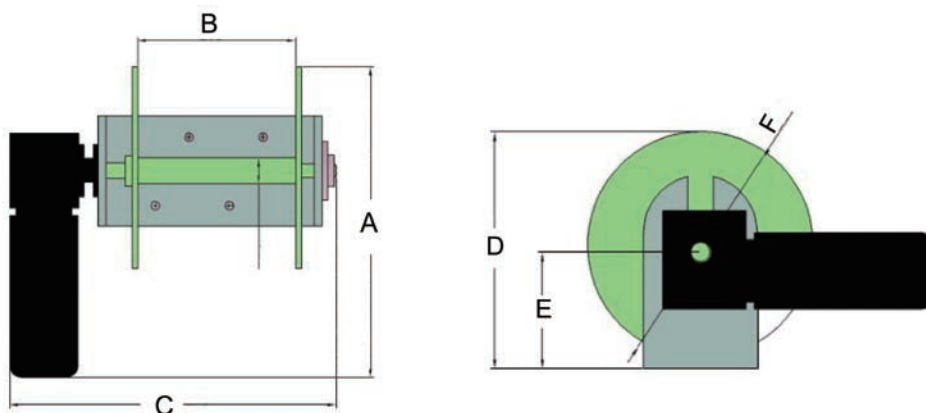

型号 Model	电机 Motor	A	B	C	D	E	F
YDW-010	400W	300	175	350	200	110	185
YDW-011	600W	335	206	376	265	140	245
YDW-012	1000W	410	208	393	310	165	290
YDW-013	1400W	450	230	423	350	180	340
YDW-014	1600W	520	260	500	420	215	400
YDW-015	2500W	705	433	722	570	295	550

NS Series Drum Winch NS 系列绞车


- The fully sealed gearbox is driven by a vertically mounted, permanent magnet motor
- Gearbox housings are marine grade alloy
- Except the gearbox, other parts of the winch are stainless steel, fully waterproof and rustproof.
- The motor can be mounted at 30,45 and 90 degrees to suit the configuration of the anchor well
- To protect the motor, the circuit breaker will trip out if there is a power overload (for example if the anchor is stuck on the bottom).
- Easily disassembled for servicing
- Fit include hand-switch, solenoid and circuit breaker
- 全封闭减速箱，立式安装，稀土电机
- 减速箱外壳材质是船用铝合金
- 除去减速箱和电机，其他部分材质均是不锈钢材质，加装电机不锈钢外壳，有极佳的防水防锈功能
- 电机可以与水平面成 30 度，45 度或者 90 度安装，来适应不同的锚
- 如果电机过度负载（比如锚被卡在河床底部），继电器会断开来保护电机
- 拆装简单便于检修维护
- 配手动开关，换向器，断路开关

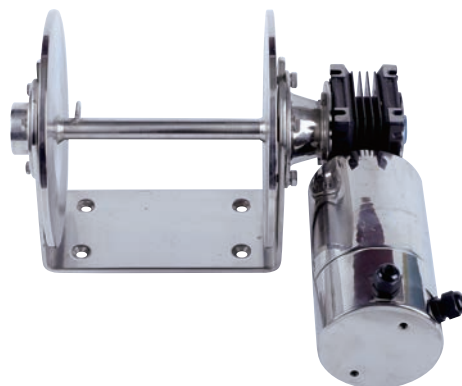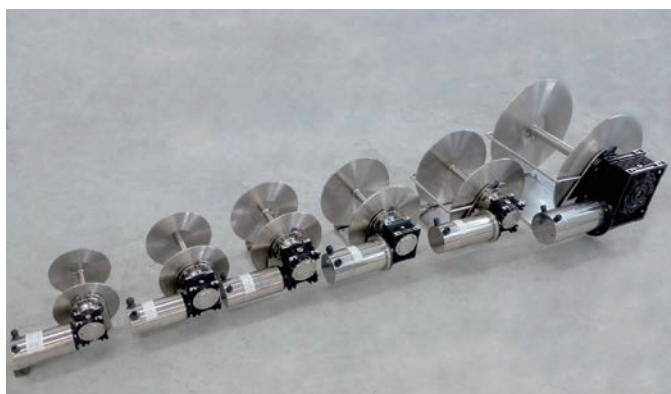

Specification 规格型号

型号 Model	净重 Weight	供电电源 Power Supply	电机 Motor	工作电流 AMPS@ Working Load	工作负载 Working Load	最大拉力 Max. Pull	建议容绳量 Suggested Rope length	建议锚链长度 Suggest Chain Size & length
YDW-010S	12.5kg	12V/24V	400W	50A/30A	70kg	320kg	6mm*70m	6mm*3m
YDW-011S	18.5kg	12V/24V	600W	70A/40A	90kg	510kg	6mm*100m	6mm*3m
YDW-012S	25.1kg	12V/24V	1000W	100A/60A	120kg	750kg	8mm*105m	8mm*3m
YDW-013S	32.5kg	12V/24V	1400W	125A/70A	145kg	900kg	8mm*170m	8mm*3m
YDW-014S	44.5kg	12V/24V	1600W	150A/80A	170kg	980kg	10mm*260m	10mm*3m
YDW-015S	119kg	24V/48V	2500W	160A/80A	210kg	1600kg	14mm*400m	12mm*3m

Dimension 尺寸图

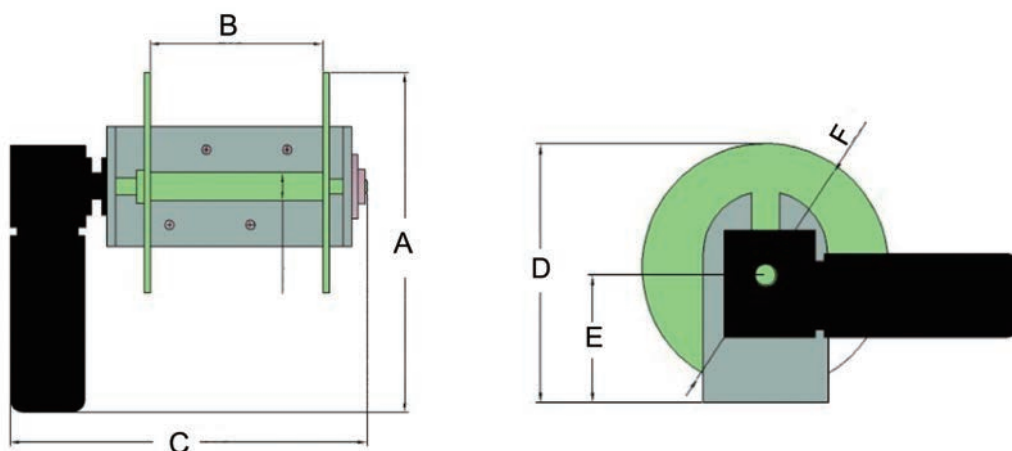

型号 Model	电机 Motor	A	B	C	D	E	F
YDW-010S	400W	320	175	350	200	110	185
YDW-011S	600W	370	206	376	265	140	245
YDW-012S	1000W	420	208	395	310	165	290
YDW-013S	1400W	480	248	450	350	180	340
YDW-014S	1600W	535	260	520	420	215	400
YDW-015S	2500W	740	433	750	570	295	550

ACCESSORIES 电控配件



HAND SWITCH
手动开关



SOLENOID
换向器



CIRCUIT BREAKER
断路开关

WS Series Drum Winch WS 系列绞车


- The fully sealed gearbox is driven by a vertically mounted, permanent magnet motor
- Gearbox housings are marine grade alloy
- Whole winch are stainless steel, fully waterproof and rustproof.
- The motor can be mounted at 30,45 and 90 degrees to suit the configuration of the anchor well
- To protect the motor, the circuit breaker will trip out if there is a power overload (for example if the anchor is stuck on the bottom).
- Easily disassembled for servicing
- Fit include hand-switch, solenoid and circuit breaker
- 全封闭减速箱，立式安装，稀土电机
- 减速箱外壳材质是船用铝合金
- 绞车整体全部不锈钢材质，完全防水防锈
- 电机可以与水平面成 30 度，45 度或者 90 度安装，来适应不同的锚
- 如果电机过度负载（比如锚被卡在河床底部），继电器会断开来保护电机
- 拆装简单便于检修维护
- 配手动开关，换向器，断路开关



Specification 规格型号

型号 Model	净重 Weight	供电电源 Power Supply	电机 Motor	工作电流 AMPS@ Working Load	工作负载 Working Load	最大拉力 Max. Pull	建议容绳量 Suggested Rope length	建议锚链长度 Suggest Chain Size & length
YDWS-010S	14.4kg	12V/24V	400W	50A/30A	70kg	320kg	6mm*70m	6mm*3m
YDWS-011S	19.9kg	12V/24V	600W	70A/40A	90kg	510kg	6mm*100m	6mm*3m
YDWS-012S	26.5kg	12V/24V	1000W	100A/60A	120kg	750kg	8mm*105m	8mm*3m
YDWS-013S	34.5kg	12V/24V	1400W	125A/70A	145kg	900kg	8mm*170m	8mm*3m
YDWS-014S	46.5kg	12V/24V	1600W	150A/80A	170kg	980kg	10mm*260m	10mm*3m
YDWS-015S	124kg	24V/48V	2500W	160A/80A	210kg	1600kg	14mm*400m	12mm*3m

Dimension 尺寸图

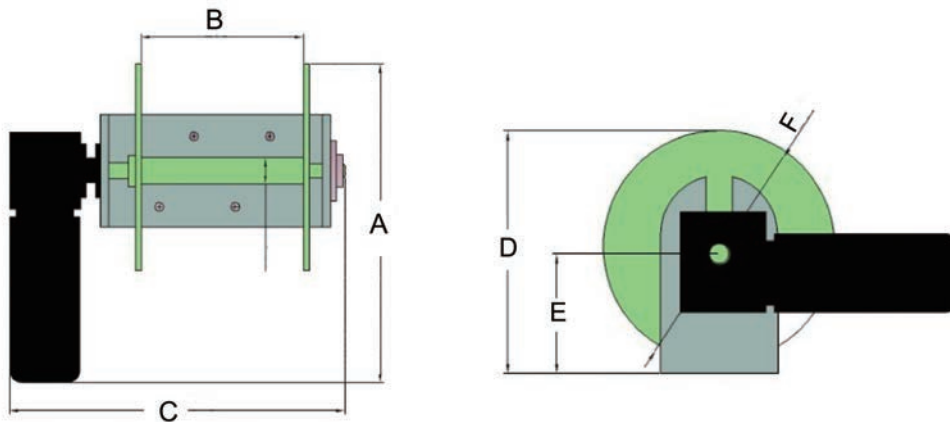

型号 Model	电机 Motor	A	B	C	D	E	F
YDWS-010S	400W	320	175	350	200	110	185
YDWS-011S	600W	370	206	376	265	140	245
YDWS-012S	1000W	420	208	395	310	165	290
YDWS-013S	1400W	480	248	450	350	180	340
YDWS-014S	1600W	535	260	520	420	215	400
YDWS-015S	2500W	740	433	750	570	295	550


Free Fall Series 手动离合电动绞车

- No need to tie off your rope at anchorage.
- The speed of retrieval increases with each revolution.
- All rope and chain is spooled on and off the drum at a rate of 80 and 90ft per minute
- The rope and chain does not twist and tangle causing the unit to malfunction.
- With the flick of a switch the anchor is raised and lowered.
- The NYS winch will freefall at up to 600 feet/minute which is a real advantage when you fish in depths greater than 20 meters. Also the drum can only free spool whilst there is weight pulling down so once the anchor hits the seabed the drum will automatically stop which totally eliminates the risk of an over run which happens when too much rope is spooled out when anchoring.
- 抛锚的时候无需把锚绳解下
- 每缠绕一圈，回收绳子的速度也会越来越快
- 绞车会以 80 和 90 英尺每分钟的速度收放锚绳和锚链
- 设备出现故障时，绳子和链子也不会缠绕在一起或者打结
- 只需要轻按开关轻松收放船锚
- 当您在水深超过 20 米的水域捕鱼时，离合绞车会以 600 英尺 / 每分钟的速度自由落体。绞车只有在负重情况下离合装置才会起作用，当锚接触河床绞车就会停止运转，所以抛锚的时候不会有太多多余的绳子脱开。



Other OPTIONS 其他配置选择


Whole 316 stainless steel free fall drum winch also available
整体不锈钢手动离合绞盘

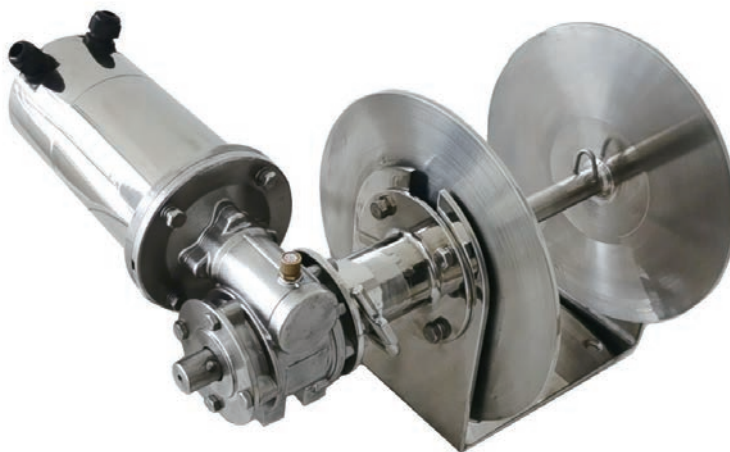

Specification 规格型号

型号 Model	净重 Weight	供电电源 Power Supply	电机 Motor	工作电流 AMPS@ Working Load	工作负载 Working Load	最大拉力 Max. Pull	建议容绳量 Suggested Rope length	建议锚链长度 Suggest Chain Size & length
YDW-011F	19.5kg	12V/24V	600W	70A/40A	90kg	510kg	6mm*100m	6mm*3m
YDW-012F	27.5kg	12V/24V	1000W	100A/60A	120kg	750kg	8mm*105m	8mm*3m
YDW-013F	34.5kg	12V/24V	1400W	125A/70A	145kg	900kg	8mm*170m	8mm*3m
YDW-014F	47kg	12V/24V	1600W	150A/80A	170kg	980kg	10mm*260m	10mm*3m
YDW-015F	125kg	24V/48V	2500W	160A/80A	210kg	1600kg	14mm*400m	12mm*3m

Dimension 尺寸图

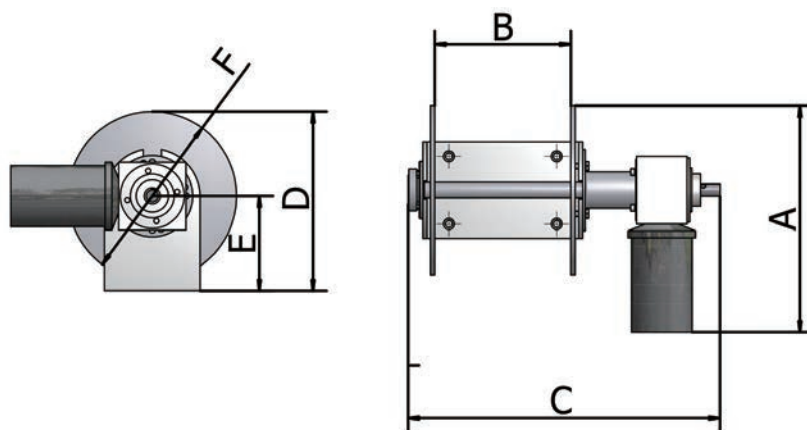

型号 Model	电机 Motor	A	B	C	D	E	F
YDW-011F	600W	370	206	435	265	140	245
YDW-012F	1000W	420	208	448	310	165	290
YDW-013F	1400W	480	248	478	350	180	340
YDW-014F	1600W	535	260	560	420	215	400
YDW-015F	2500W	740	433	770	570	295	550

Free Fall DS Series 电动离合电动绞车 DS 系列

- No need to tie off your rope at anchorage.
- The speed of retrieval increases with each revolution.
- All rope and chain is spooled on and off the drum at a rate of 80 and 90 ft per minute
- The rope and chain does not twist and tangle causing the unit to malfunction.
- Press the clutch switch, just loosen the clutch and the anchor will be free fall drop. Once you wish to raise the anchor, just power down the clutch switch and then press the winch clutch "UP" bottom.
- The NYS winch will freefall at up to 600 feet/minute which is a real advantage when you fish in depths greater than 20 meters. Also the drum can only free spool whilst there is weight pulling down so once the anchor hits the seabed the drum will automatically stop which totally eliminates the risk of an over run which happens when too much rope is spooled out when anchoring.
- 抛锚的时候无需把锚绳解下
- 每缠绕一圈，回收绳子的速度也会越来越快
- 绞车会以 80 和 90 英尺每分钟的速度收放锚绳和锚链
- 设备出现故障时，绳子和链子也不会缠绕在一起或者打结
- 当你想使用离合功能快速放锚的时候，只需要按下离合器开关，锚会快速自由落下完成抛锚工作。当你需要收锚时候，关掉离合开关，按下绞车“UP”按钮即可。
- 当您在水深超过 20 米的水域捕鱼时，离合绞车会以 600 英尺 / 每分钟的速度自由落体。绞车只有在负重情况下离合装置才会起作用，当锚接触河床绞车就会停止运转，所以抛锚的时候不会有太多多余的绳子脱开。



ACCESSORIES 电控配件



HAND SWITCH
手动开关



SOLENOID
换向器




CIRCUIT BREAKER
断路开关

Specification 规格型号

型号 Model	净重 Weight	供电电源 Power Supply	电机 Motor	工作电流 AMPS@ Working Load	工作负载 Working Load	最大拉力 Max. Pull	建议容绳量 Suggested Rope length	建议锚链长度 Suggest Chain Size & length
YDW-011FS	23.5kg	12V/24V	600W	70A/40A	90kg	510kg	6mm*100m	6mm*3m
YDW-012FS	31.5kg	12V/24V	1000W	100A/60A	120kg	750kg	8mm*105m	8mm*3m
YDW-013FS	38.5kg	12V/24V	1400W	125A/70A	145kg	900kg	8mm*170m	8mm*3m
YDW-014FS	51kg	12V/24V	1600W	150A/80A	170kg	980kg	10mm*260m	10mm*3m
YDW-015FS	133kg	24V/48V	2500W	160A/80A	210kg	1600kg	14mm*400m	12mm*3m

Dimension 尺寸图

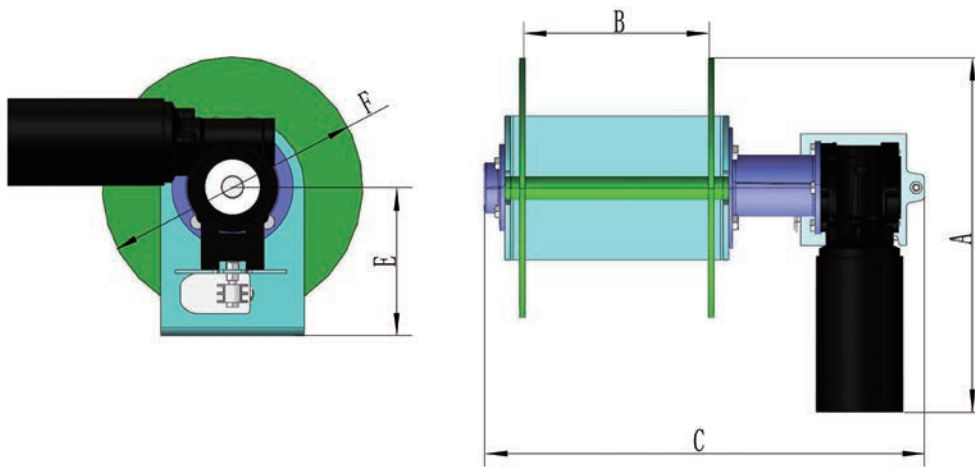

型号 Model	电机 Motor	A	B	C	D	E	F
YDW-011FS	600W	370	202	446	265	140	245
YDW-012FS	1000W	420	208	463	310	165	290
YDW-013FS	1400W	480	248	493	350	180	340
YDW-014FS	1600W	535	260	570	420	215	400
YDW-015FS	2500W	740	433	792	570	295	550


Tender Winch TW400 & TW600 绞盘

- This type winch are designed to recover a small tender and jet ski
- With heavy duty, waterproof motor and gear box
- high-class gear box can withstand the high stress
- Stainless steel drum ,base and shaft
- 这款绞盘专门为小型供应船和摩托艇设计
- 配置重型防水电机和减速箱
- 高质量的减速箱可以承受高强度的工作压力
- 不锈钢卷筒，底座和主轴



Specification 规格型号

型号 Model	净重 Weight	供电电源 Power Supply	电机 Motor	工作电流 AMPS@ Working Load	工作负载 Working Load	最大拉力 Max. Pull	速度 Speed	建议锚绳尺寸 Suggestion Rope Size
TW400	10kg	12V/24V	400W	50A/30A	70kg	320kg	20m/min	6~10mm
TW600	13kg	12V/24V	600W	70A/40A	90kg	510kg	20m/min	8~10mm

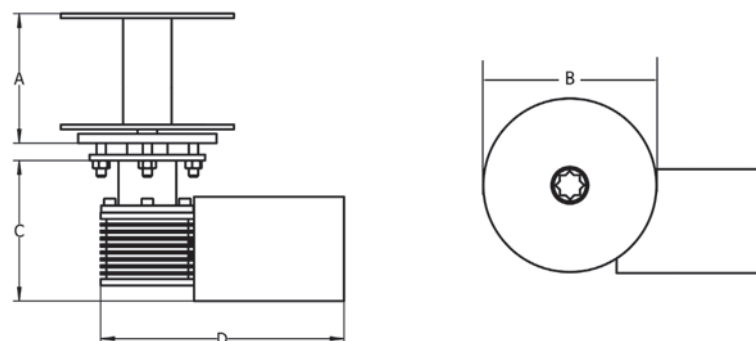

Dimension 尺寸图

型号 Model	电机 Motor	A(MM)	B(MM)	C(MM)	D(MM)
TW400	400W	120	150	125	230
TW600	600W	135	180	125	260

WINCH



- White or black ABS housing
- The parts inside are made of stainless steel or carbon steel.
- The drum can hold 5mm*50meters or 6mm*38 meters
- With clutch and can operated by hand switch
- Totally sealed motor and gearbox
- Simple deck mounted installation with no under deck parts, and the housing is removable.
- Fit hand switch and remote control

- 外壳为 ABS 材料
- 内部材料分不锈钢和碳钢两种材料
- 可以容纳 5mm 绳子 50 米 或者 6mm 绳子 38 米
- 带离合装置，可以用手动开关控制
- 全封闭式涡轮蜗杆减速箱
- 安装简单，没有需要安装在甲板以下的部件，外壳可拆卸。
- 使用时也可以不带外壳
- 配置手动开关，遥控

型号 Model	净重 N.W.	电源供电 Power Supply	电机 Motor	最大拉力 Max Pull	速度 Speed	容绳量 Rope Capacity
YDG-300	6Kg	12V	200W	50Kg	25m/min	6mm*38m/5mm*50m

