


锚 Anchors

霍尔锚

Hall Type Anchor

标准 Standard: **GB/T 546-2016** 目录页码 Catalogue page: **56**

型号 Models: H-40, H-60, H-100, H-125, H-150, H-180, H-240, H-300, H-360, H-420, H-480, H-570, H-660, H-780, H-900, H-1020, H-1140, H-1290

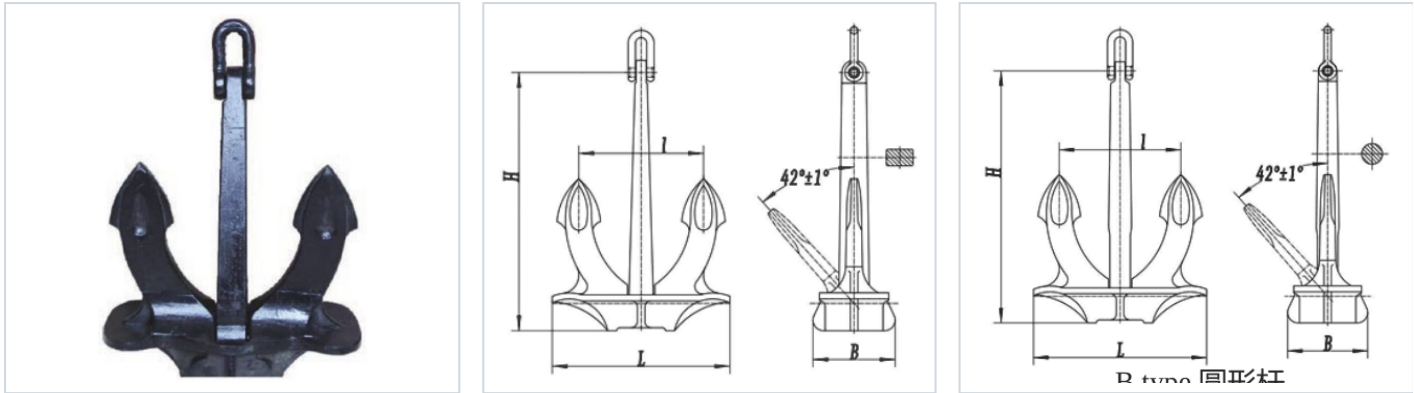

霍尔锚也称为山锚，它是一种无杆锚，可以自由旋转并与锚杆形成一定角度。它的抓地力约为锚固重量的2.5-4倍，霍尔锚多用于商用工业运输船，传统的设计，工作性能稳定。

Hall anchor is also called mountain anchor, is a typical type of a Stockless Bow Anchor. It can rotate freely and form a certain angle with the anchor rod. Its grip is about 2.5-4 times the anchor weight. The Hall anchor widely used in commercial shipping industry. The traditional design makes a stable working performance.

产品特点 Features

- 该锚型可以提供CCS/NK/LR/ABS/BV/DNV等各大船级社证书
- Certification: LR, CCS/NK/LR/ABS/BV/DNV etc.
- 可选配置：A 型 矩形杆
- Option: A type – rectangular shank
- 可选配置：B 型 圆形杆
- Option: B type – round shank
- 可选配置：C 型 矩形短杆
- Option: C type – short rectangular shank

技术参数 Specifications

规格型号 Specification

型号 Part No	名义重量(kg) Weight (kg)	H(mm)	H(mm)	H(mm)	B(mm)	L(mm)	l(mm)
型号 Part No	名义重量(kg) Weight (kg)	A 型	B 型	C 型	B(mm)	L(mm)	l(mm)
H-40	40	624	624	497	198	430	303
H-60	60	713	713	568	227	492	347
H-100	100	850	850	680	270	584	410
H-125	125	911	911	726	443	629	443
H-150	150	969	969	768	308	670	470
H-180	180	1029	1029	820	327	710	500
H-240	240	1140	1140	909	361	784	552
H-300	300	1225	1225	980	388	844	595
H-360	360	1298	1298	1036	412	898	630
H-420	420	1367	1367	1091	434	946	660

型号 Part No	名义重量(kg) Weight (kg)	H(mm)	H(mm)	H(mm)	B(mm)	L(mm)	I(mm)
H-480	480	1434	1434	1138	454	988	690
H-570	570	1517	1517	1203	481	1042	732
H-660	660	1591	1591	1262	506	1096	769
H-780	780	1684	1684	1337	535	1160	813
H-900	900	1768	1768	1403	560	1220	855
H-1020	1020	1840	1840	1463	584	1268	891
H-1140	1140	1908	1908	1519	605	1319	926
H-1290	1290	1989	1989	1589	630	1374	965