


锚 Anchors

海军锚

Navy Anchor

标准 Standard: **GB/T 545-1996** 目录页码 Catalogue page: **55**

型号 Models: N-10, N-15, N-20, N-30, N-50, N-75, N-100, N-115, N-150, N-200, N-250, N-300, N-400, N-500, N-600, N-700, N-800, N-1000, N-1250, N-1500

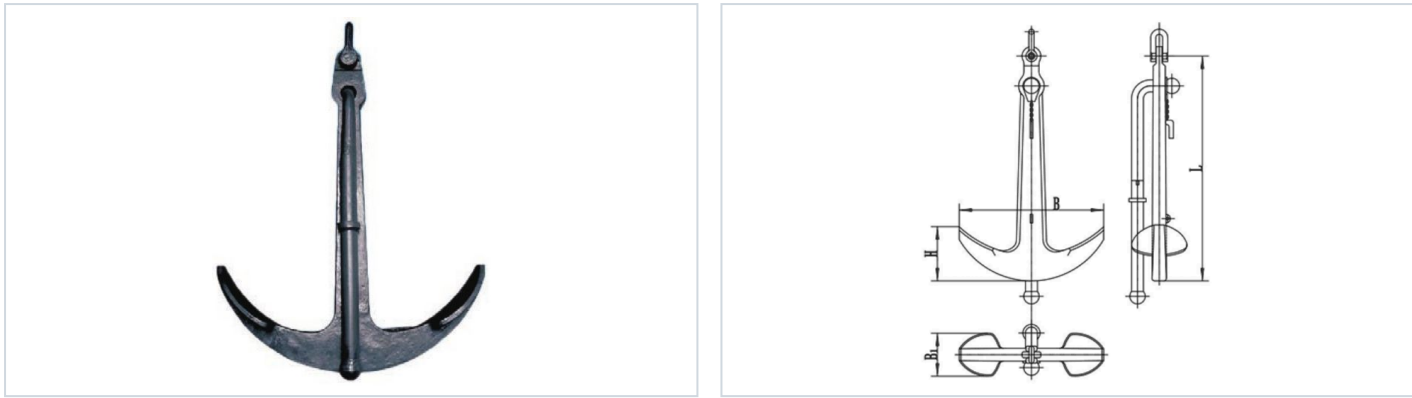

海军锚结构简单，锚杆和锚爪是铸造的。锚杆是固定的，不能来回活动。常用于船上。海军锚比较适合做商船首锚使用，可做尾锚，备用锚，多数用于小船，帆船，渔船。最大抓重比可达到12。

Navy anchor has a simple structure, shank and fluke is a body cast. The fluke is fixed, not turning. Navy anchors are more suitable to be used as bow anchors for merchant ships. They can be used as stern anchors and spare anchors. Most of them are used for small boats, sailing ships and fishing boats. More commonly used in the boat and sailing. The maximum of holding power to weight ratio can reach 12.

产品特点 Features

- 可以提供CCS/NK/LR/ABS/BV/DNV等各大船级社证书
- Certification: LR, CCS/NK/LR/ABS/BV/DNV etc.

技术参数 Specifications

规格型号 Specification

型号 Part No	名义重量(kg) Weight (kg)	B1(mm)	B(mm)	H(mm)	L(mm)
N-10	10	445	105	136	530
N-15	15	490	120	155	615
N-20	20	520	135	170	685
N-30	30	565	155	192	785
N-50	50	635	185	230	960
N-75	75	710	210	266	1105
N-100	100	780	230	293	1215
N-115	125	840	245	316	1310
N-150	150	900	265	336	1395
N-200	200	990	290	370	1535
N-250	250	1065	310	398	1650
N-300	300	1105	330	423	1755
N-400	400	1240	365	465	1930

型号 Part No	名义重量(kg) Weight (kg)	B1(mm)	B(mm)	H(mm)	L(mm)
N-500	500	1335	390	502	2080
N-600	600	1440	415	533	2210
N-700	700	1500	440	560	2330
N-800	800	1570	460	587	2435
N-1000	1000	1685	495	633	2620
N-1250	1250	1810	535	680	2825
N-1500	1500	1955	565	725	3000